



OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL



Area
KMB EXCAVATION
Machine Id
JOHN DEERE 300D ART05
Component
Center Right Final Drive
Fluid
GEAR OIL LS 80W90 (--- GAL)

RECOMMENDATION

Échantillonner de nouveau l'équipement au prochain intervalle de vidange afin d'en surveiller la condition. Le fluide n'était pas spécifié, toutefois, une comparaison avec d'autres fluides indiqua que ce fluide est du (GENERIC) GEAR OIL LS 80W90. Veuillez confirmer.

WEAR

Les taux d'usure de tous les composants sont normaux.










CONTAMINATION

Il n'y a aucun indice de contamination dans l'huile.

FLUID CONDITION

L'état de l'huile est acceptable pour la durée de service.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		ASF0000310	---	---
Sample Date		Client Info		15 Apr 2024	---	---
Machine Age	hrs	Client Info		15932	---	---
Oil Age	hrs	Client Info		968	---	---
Filter Age	hrs	Client Info		0	---	---
Oil Changed		Client Info		Not Changed	---	---
Filter Changed		Client Info		Not Changed	---	---
Sample Status				NORMAL	---	---
<hr/>						
Iron	ppm	ASTM D5185(m)	>750	48	---	---
Chromium	ppm	ASTM D5185(m)	>9	<1	---	---
Nickel	ppm	ASTM D5185(m)	>10	<1	---	---
Titanium	ppm	ASTM D5185(m)		0	---	---
Silver	ppm	ASTM D5185(m)		0	---	---
Aluminum	ppm	ASTM D5185(m)	>40	1	---	---
Lead	ppm	ASTM D5185(m)	>15	0	---	---
Copper	ppm	ASTM D5185(m)	>40	5	---	---
Tin	ppm	ASTM D5185(m)	>10	0	---	---
Vanadium	ppm	ASTM D5185(m)		0	---	---
White Metal	scalar	Visual*	NONE	NONE	---	---
Yellow Metal	scalar	Visual*	NONE	NONE	---	---
<hr/>						
Silicon	ppm	ASTM D5185(m)	>75	5	---	---
Potassium	ppm	ASTM D5185(m)	>20	<1	---	---
Water		WC Method	>0.075	NEG	---	---
Silt	scalar	Visual*	NONE	NONE	---	---
Debris	scalar	Visual*	NONE	VLITE	---	---
Sand/Dirt	scalar	Visual*	NONE	NONE	---	---
Appearance	scalar	Visual*	NORML	NORML	---	---
Odor	scalar	Visual*	NORML	NORML	---	---
Emulsified Water	scalar	Visual*	>0.075	NEG	---	---
<hr/>						
Sodium	ppm	ASTM D5185(m)	>51	<1	---	---
Boron	ppm	ASTM D5185(m)	150	54	---	---
Barium	ppm	ASTM D5185(m)		0	---	---
Molybdenum	ppm	ASTM D5185(m)		32	---	---
Manganese	ppm	ASTM D5185(m)		<1	---	---
Magnesium	ppm	ASTM D5185(m)	10	3	---	---
Calcium	ppm	ASTM D5185(m)	70	12	---	---
Phosphorus	ppm	ASTM D5185(m)	2000	1085	---	---
Zinc	ppm	ASTM D5185(m)	50	18	---	---
Sulfur	ppm	ASTM D5185(m)	20000	15961	---	---
Visc @ 40°C	cSt	ASTM D7279(m)	140	127	---	---

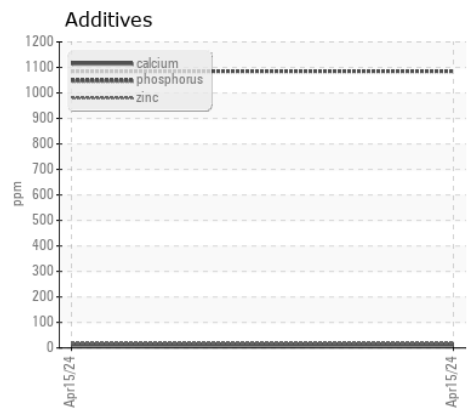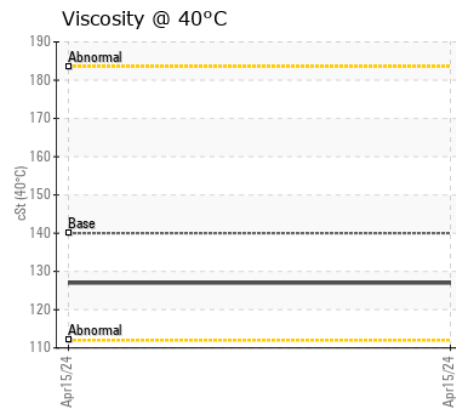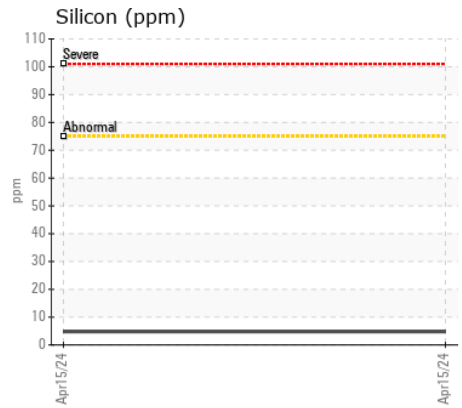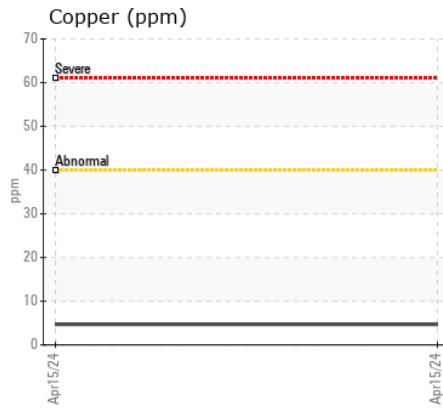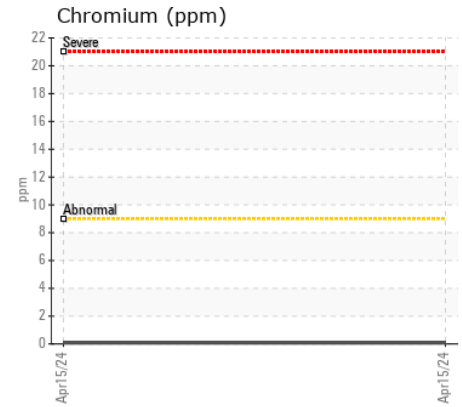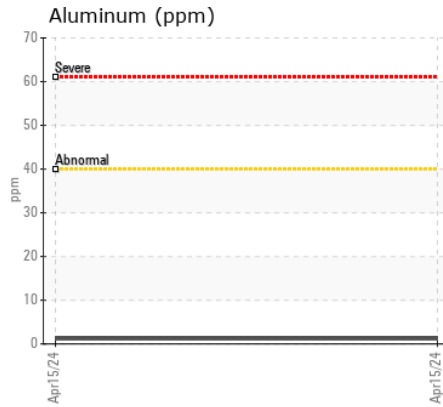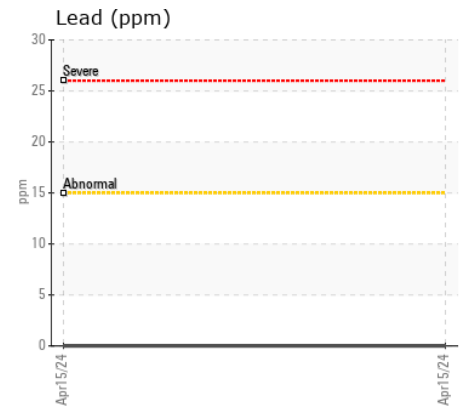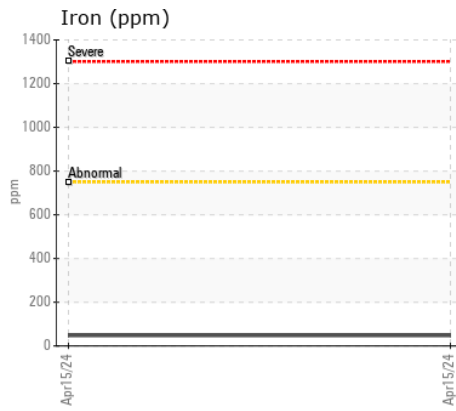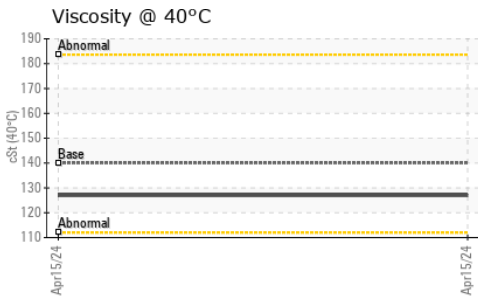

Laboratory : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9
Sample No. : ASF0000310 **Received** : 30 Apr 2024
Lab Number : 02632379 **Tested** : 30 Apr 2024
Unique Number : 5773532 **Diagnosed** : 30 Apr 2024 - Wes Davis
Test Package : MOB 1

April Super Flo
 9 rue Beland
 L'Isle-Verte, QC
 CA G0L 1K0
 Contact: Michel Jalbert
 mjalbert@aprilsuperflo.com
 T:
 F: (418)898-2192

To discuss this sample report, contact Customer Service at 1-800-268-2131.
 Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab.
 Validity of results and interpretation are based on the sample and information as supplied.