Honeywell

OIL ANALYSIS REPORT

Area AIRSPRAY [53217] 690C P-06310C (S/N 11025)

Jet Turbine

WEAR

CONTAMINATION

FLUID CONDITION

SHELL AEROSHELL 500 (--- GAL)

RECOMMENDATION


This is a baseline read-out on the submitted sample.


WEAR	NORMAL
CONTAMINATION	NORMAL

FLUID CONDITION

NORMAL

Test	UON	/ Method	Limit/Abn	Current	History1	History2
Sample N	lumber	Client Info		GT57069	GT56199	
Sample I	Date	Client Info		27 Mar 2024	22 Jun 2023	
Machine	Age hrs	Client Info		0	0	
Oil Age	hrs	Client Info		284	179	
Filter Age	e hrs	Client Info		104	94	
Oil Chan	ged	Client Info		N/A	N/A	
Filter Ch	anged	Client Info		N/A	N/A	
Sample	Status			NORMAL		
Iron	ppm	ASTM D5185(m)	>8	<1	<1	
Chromiu	m ppm	ASTM D5185(m)	>2	0	0	
Nickel	ppm	ASTM D5185(m)	>2	0	0	
Silver	ppm	ASTM D5185(m)	>2	0	0	
Aluminur	n ppm	ASTM D5185(m)	>2	<1	1	
Lead	ppm	ASTM D5185(m)	>3	<1	<1	
Copper	ppm	ASTM D5185(m)	>3	<1	<1	
Water		WC Method	>0.1	NEG	NEG	
Magnesi	um ppm	ASTM D5185(m)	0	0	0	
Acid Numb	er (AN) mg KO	H/g ASTM D974*	0.11	0.17	0.31	
Visc @ 4	•0°C cSt	ASTM D7279(m)	25.3	25.6		

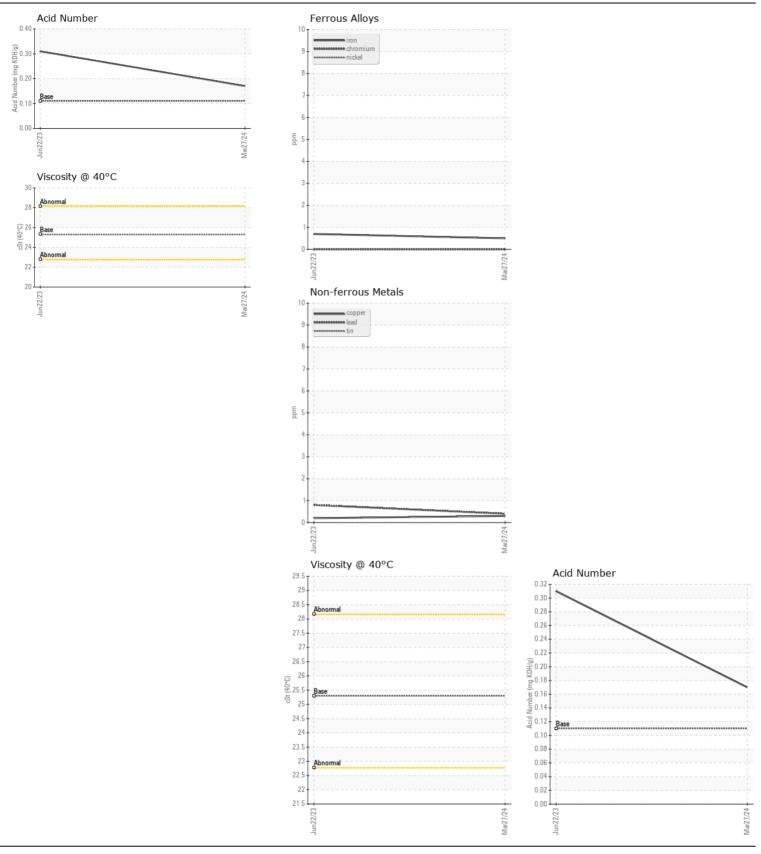



Contact/Location: GARRETT ? - HONPHO Page 2 of 2