



OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL



Machine Id
EGR-26112 Stbd Steering
Component
Aft Pump
Fluid
SHELL TELLUS S2 VX 32 (250 LTR)

RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		WC0739318	WC0827863	WC0574856
Sample Date		Client Info		18 Apr 2024	01 Sep 2023	07 Sep 2021
Machine Age	hrs	Client Info		10003	9404	7723
Oil Age	hrs	Client Info		0	0	0
Filter Age	hrs	Client Info		0	0	0
Oil Changed		Client Info		Not Chngd	Not Chngd	Not Chngd
Filter Changed		Client Info		Not Chngd	Not Chngd	Changed
Sample Status				NORMAL	NORMAL	NORMAL

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185(m)	>500	4	3	3
Chromium	ppm	ASTM D5185(m)	>7	0	0	<1
Nickel	ppm	ASTM D5185(m)		0	0	<1
Titanium	ppm	ASTM D5185(m)		0	0	0
Silver	ppm	ASTM D5185(m)		0	0	<1
Aluminum	ppm	ASTM D5185(m)	>25	0	<1	<1
Lead	ppm	ASTM D5185(m)	>35	0	0	9
Copper	ppm	ASTM D5185(m)	>50	1	<1	16
Tin	ppm	ASTM D5185(m)	>5	0	0	<1
Vanadium	ppm	ASTM D5185(m)		0	0	0
White Metal	scalar	Visual*	NONE	NONE	NONE	NONE
Yellow Metal	scalar	Visual*	NONE	NONE	NONE	NONE

CONTAMINATION










The system cleanliness is acceptable for your target ISO 4406 cleanliness code. The system and fluid cleanliness is acceptable.

Silicon	ppm	ASTM D5185(m)	>50	0	0	<1
Potassium	ppm	ASTM D5185(m)	>20	<1	0	<1
Water		WC Method	>.1	NEG	NEG	NEG
Particles >4µm		ASTM D7647	>5000	1190	887	706
Particles >6µm		ASTM D7647	>1300	224	144	174
Particles >14µm		ASTM D7647	>160	22	15	18
Particles >21µm		ASTM D7647	>40	3	5	4
Particles >38µm		ASTM D7647	>10	1	0	0
Particles >71µm		ASTM D7647	>3	1	0	0
Oil Cleanliness		ISO 4406 (c)	>19/17/14	17/15/12	17/14/11	17/15/11
Silt	scalar	Visual*	NONE	NONE	NONE	NONE
Debris	scalar	Visual*	NONE	NONE	NONE	NONE
Sand/Dirt	scalar	Visual*	NONE	NONE	NONE	NONE
Appearance	scalar	Visual*	NORML	NORML	NORML	NORML
Odor	scalar	Visual*	NORML	NORML	NORML	NORML
Emulsified Water	scalar	Visual*	>.1	NEG	NEG	NEG

FLUID CONDITION

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

Sodium	ppm	ASTM D5185(m)		<1	<1	<1
Boron	ppm	ASTM D5185(m)		1	<1	3
Barium	ppm	ASTM D5185(m)		0	0	0
Molybdenum	ppm	ASTM D5185(m)		0	0	<1
Manganese	ppm	ASTM D5185(m)		0	0	0
Magnesium	ppm	ASTM D5185(m)		64	69	1
Calcium	ppm	ASTM D5185(m)		72	14	149
Phosphorus	ppm	ASTM D5185(m)		275	310	263
Zinc	ppm	ASTM D5185(m)		328	344	327
Sulfur	ppm	ASTM D5185(m)		733	709	792
Acid Number (AN)	mg KOH/g	ASTM D974*		0.40	0.39	0.30
Visc @ 40°C	cSt	ASTM D7279(m)	32	33.1	32.6	31.9

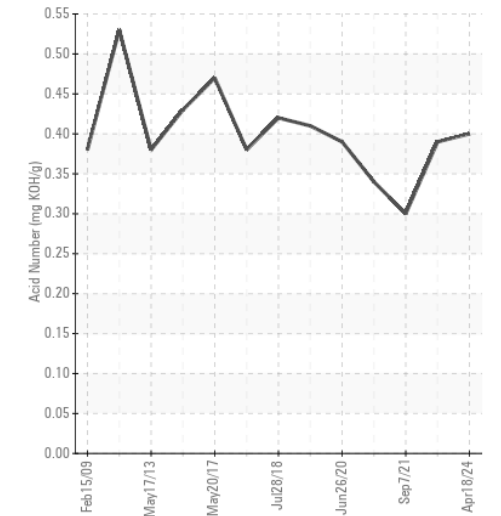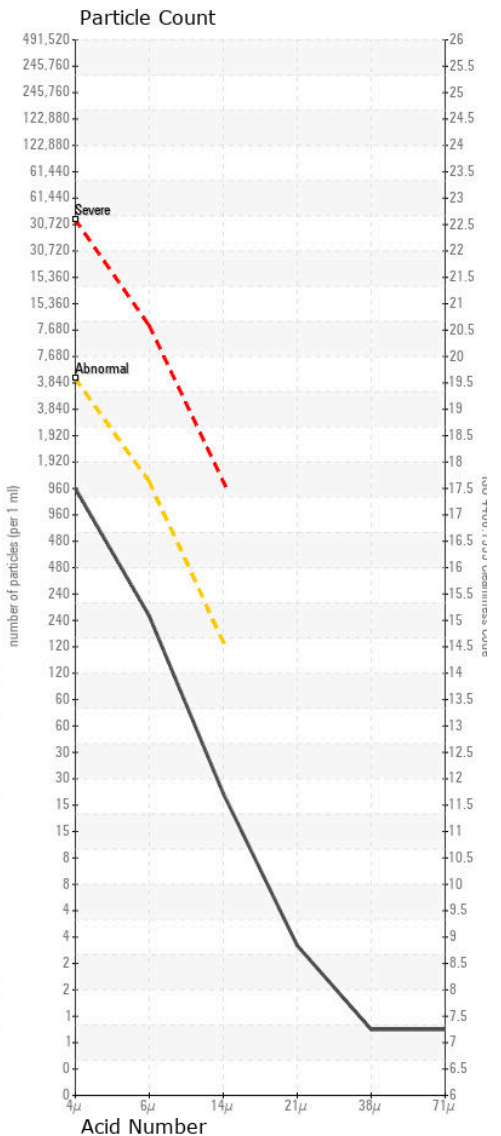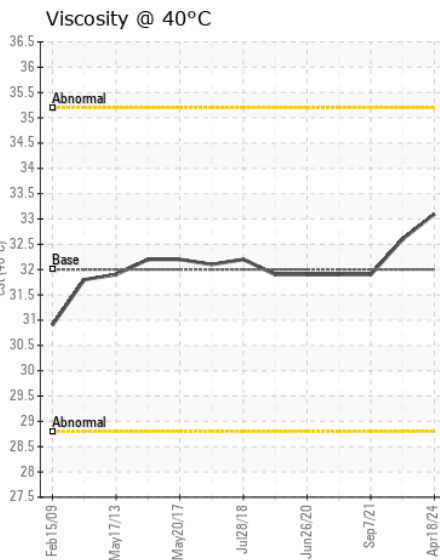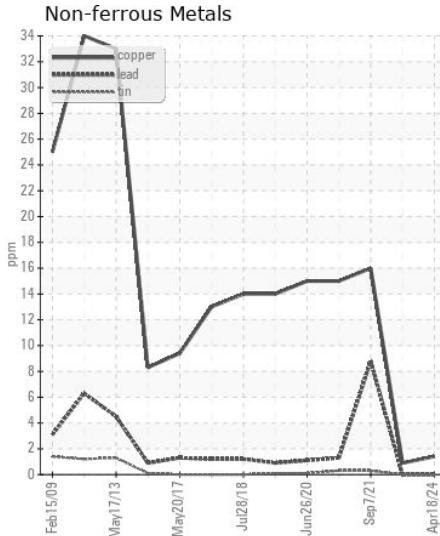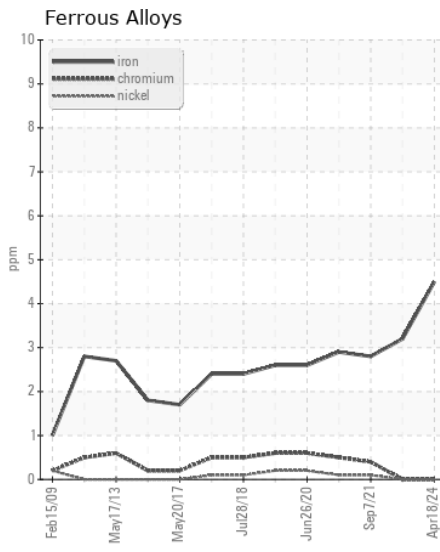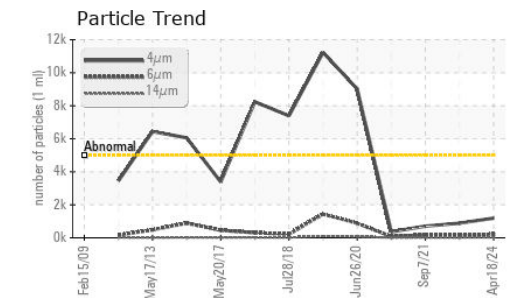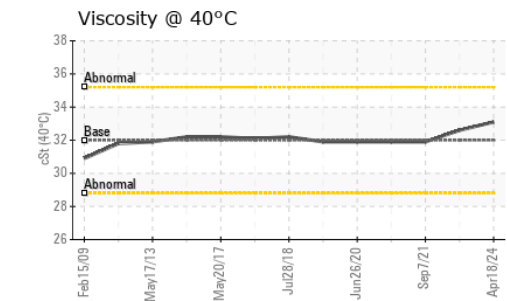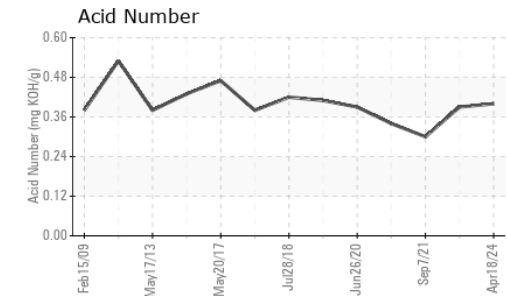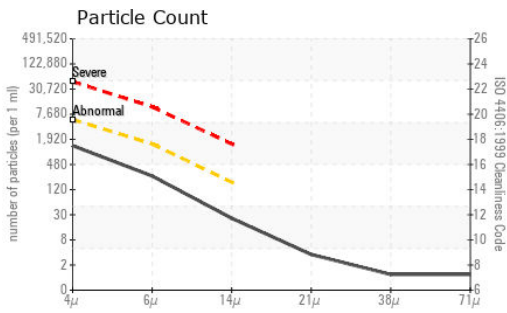

Laboratory : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9
Sample No. : WC0739318
Lab Number : 02632589
Unique Number : 5773742
Test Package : MAR 2

Received : 01 May 2024
Tested : 02 May 2024
Diagnosed : 02 May 2024 - Wes Davis

DFO, CCGS EARL GREY
 PO BOX 1006, 1 CHALLENGER DR.
 DARTMOUTH, NS
 CA B2Y 4A2
 Contact: Chief Engineer
 earlgreyCE@EGR.ccs-gc.gc.ca
 T: (902)456-9285
 F: (902)456-9285

To discuss this sample report, contact Customer Service at 1-800-268-2131.
 Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab.
 Validity of results and interpretation are based on the sample and information as supplied.