



WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Machine Id
Snorkel 0001
 Component
Bulk Tank Hydraulic System
 Fluid
AW HYDRAULIC OIL ISO 32 (--- GAL)

RECOMMENDATION

Resample at the next service interval to monitor. The fluid was not specified, however, a fluid match indicates that this fluid is (GENERIC) AW HYDRAULIC OIL ISO 32. Please confirm. Please contact your representative for information regarding the proper sampling kits for your service. NOTE: We recommend using MOB 2 test kits, this testkit includes Particle Count to determine the ISO cleanliness of the fluid.

WEAR

All component wear rates are normal.










CONTAMINATION

There is no indication of any contamination in the component(unconfirmed).

FLUID CONDITION

The condition of the oil is acceptable for the time in service.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		IL0032690	---	---
Sample Date		Client Info		28 Apr 2024	---	---
Machine Age	hrs	Client Info		7300	---	---
Oil Age	hrs	Client Info		0	---	---
Filter Age	hrs	Client Info		10	---	---
Oil Changed		Client Info		Not Chngd	---	---
Filter Changed		Client Info		Not Chngd	---	---
Sample Status				NORMAL	---	---
PQ		ASTM D8184*		0	---	---
Iron	ppm	ASTM D5185(m)	>20	21	---	---
Chromium	ppm	ASTM D5185(m)	>10	<1	---	---
Nickel	ppm	ASTM D5185(m)	>10	0	---	---
Titanium	ppm	ASTM D5185(m)		0	---	---
Silver	ppm	ASTM D5185(m)		0	---	---
Aluminum	ppm	ASTM D5185(m)	>10	1	---	---
Lead	ppm	ASTM D5185(m)	>10	<1	---	---
Copper	ppm	ASTM D5185(m)	>75	25	---	---
Tin	ppm	ASTM D5185(m)	>10	<1	---	---
Vanadium	ppm	ASTM D5185(m)		0	---	---
White Metal	scalar	Visual*	NONE	NONE	---	---
Yellow Metal	scalar	Visual*	NONE	NONE	---	---
Silicon	ppm	ASTM D5185(m)	>20	2	---	---
Potassium	ppm	ASTM D5185(m)	>20	<1	---	---
Water		WC Method	>0.1	NEG	---	---
Silt	scalar	Visual*	NONE	NONE	---	---
Debris	scalar	Visual*	NONE	NONE	---	---
Sand/Dirt	scalar	Visual*	NONE	VLITE	---	---
Appearance	scalar	Visual*	NORML	NORML	---	---
Odor	scalar	Visual*	NORML	NORML	---	---
Emulsified Water	scalar	Visual*	>0.1	NEG	---	---
Sodium	ppm	ASTM D5185(m)		<1	---	---
Boron	ppm	ASTM D5185(m)	5	3	---	---
Barium	ppm	ASTM D5185(m)	5	<1	---	---
Molybdenum	ppm	ASTM D5185(m)	5	0	---	---
Manganese	ppm	ASTM D5185(m)		<1	---	---
Magnesium	ppm	ASTM D5185(m)	25	15	---	---
Calcium	ppm	ASTM D5185(m)	200	177	---	---
Phosphorus	ppm	ASTM D5185(m)	300	378	---	---
Zinc	ppm	ASTM D5185(m)	370	498	---	---
Sulfur	ppm	ASTM D5185(m)	2500	2245	---	---
Visc @ 40°C	cSt	ASTM D7279(m)	32	32.0	---	---

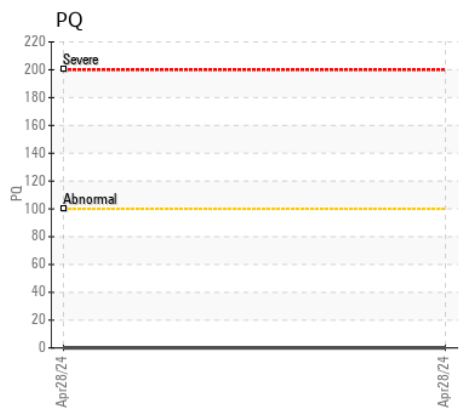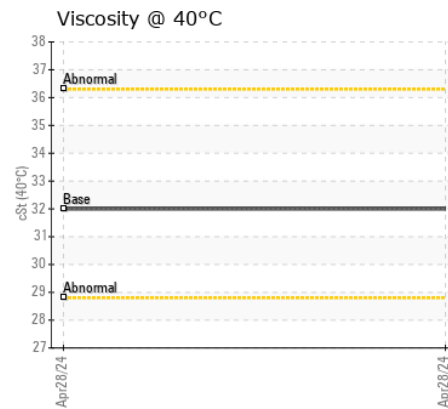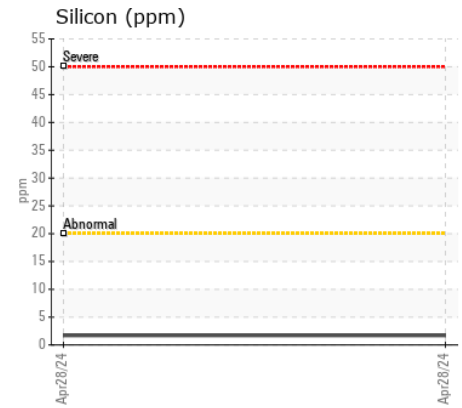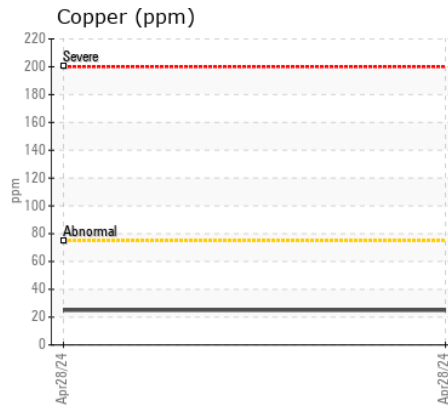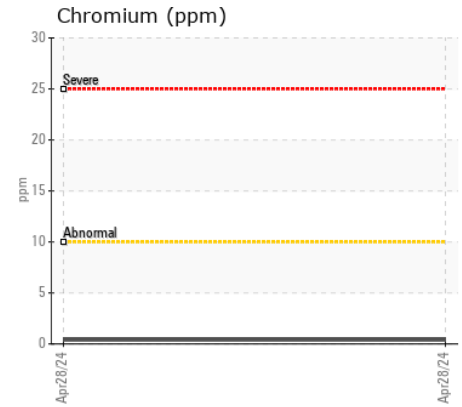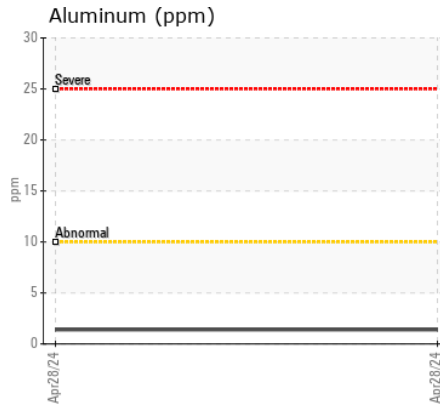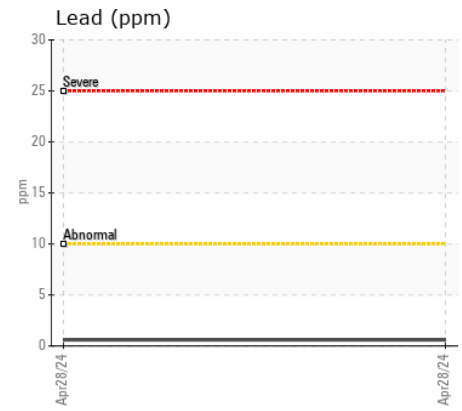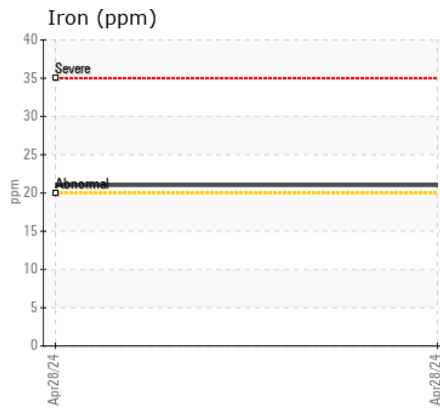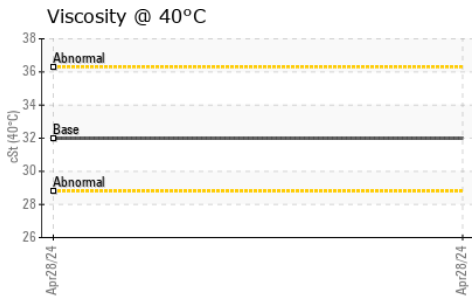

Laboratory : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9
Sample No. : IL0032690 **Received** : 01 May 2024
Lab Number : **02632603** **Tested** : 01 May 2024
Unique Number : 5773756 **Diagnosed** : 01 May 2024 - Kevin Marson
Test Package : MOB 1 (Additional Tests: PQ)

ALTRUCK INTERNATIONAL
 BOX 474, 33910 AIRPORT ROAD
 GODERICH, ON
 CA N7A 4C7
 Contact: Doug MacDonald
 doug.macdonald@altruck.com
 T: (519)524-7379
 F: (519)524-7380

To discuss this sample report, contact Customer Service at 1-800-268-2131.
 Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab.
 Validity of results and interpretation are based on the sample and information as supplied.