



OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Machine Id
EGR-8121 Anchor Windlass (S/N 85-1008)
 Component
Gearbox
 Fluid
SHELL OMALA S2 GX 220 (40 LTR)

RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		WC0494629	WC0494627	WC0494626
Sample Date		Client Info		25 Apr 2024	13 May 2023	30 Mar 2023
Machine Age	yrs	Client Info		0	0	0
Oil Age	yrs	Client Info		0	0	0
Filter Age	yrs	Client Info		0	0	0
Oil Changed		Client Info		N/A	Changed	Not Changd
Filter Changed		Client Info		None	None	None
Sample Status				NORMAL	NORMAL	NORMAL

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185(m)	>150	5	7	8
Chromium	ppm	ASTM D5185(m)	>10	0	0	0
Nickel	ppm	ASTM D5185(m)	>10	0	<1	<1
Titanium	ppm	ASTM D5185(m)		0	0	0
Silver	ppm	ASTM D5185(m)		0	0	0
Aluminum	ppm	ASTM D5185(m)	>5	0	<1	0
Lead	ppm	ASTM D5185(m)	>65	0	0	0
Copper	ppm	ASTM D5185(m)	>80	<1	0	<1
Tin	ppm	ASTM D5185(m)	>8	0	0	0
Vanadium	ppm	ASTM D5185(m)		0	0	0
White Metal	scalar	Visual*	NONE	NONE	NONE	NONE
Yellow Metal	scalar	Visual*	NONE	NONE	NONE	NONE

CONTAMINATION

There is no indication of any contamination in the oil.


Silicon	ppm	ASTM D5185(m)	>20	4	3	5
Potassium	ppm	ASTM D5185(m)	>20	<1	<1	0
Water		WC Method	>0.2	NEG	NEG	NEG
Silt	scalar	Visual*	NONE	NONE	NONE	NONE
Debris	scalar	Visual*	NONE	VLITE	NONE	VLITE
Sand/Dirt	scalar	Visual*	NONE	NONE	NONE	NONE
Appearance	scalar	Visual*	NORML	NORML	NORML	NORML
Odor	scalar	Visual*	NORML	NORML	NORML	NORML
Emulsified Water	scalar	Visual*	>0.2	NEG	NEG	NEG

FLUID CONDITION


The condition of the oil is acceptable for the time in service.

Sodium	ppm	ASTM D5185(m)		<1	1	1
Boron	ppm	ASTM D5185(m)	6.2	<1	<1	<1
Barium	ppm	ASTM D5185(m)	0.0	0	0	0
Molybdenum	ppm	ASTM D5185(m)	0	0	0	<1
Manganese	ppm	ASTM D5185(m)		0	<1	<1
Magnesium	ppm	ASTM D5185(m)	0	<1	<1	<1
Calcium	ppm	ASTM D5185(m)	0.0	1	<1	<1
Phosphorus	ppm	ASTM D5185(m)	290	281	301	319
Zinc	ppm	ASTM D5185(m)	3.8	2	2	3
Sulfur	ppm	ASTM D5185(m)	8167	7894	8530	9126
Visc @ 40°C	cSt	ASTM D7279(m)	220	216	214	215


Viscosity @ 40°C

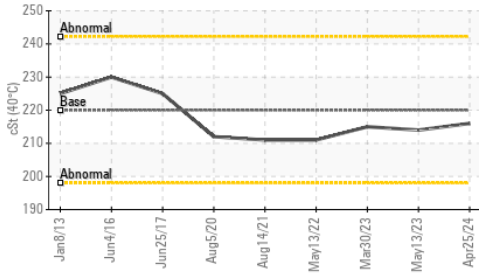


Ferrous Alloys

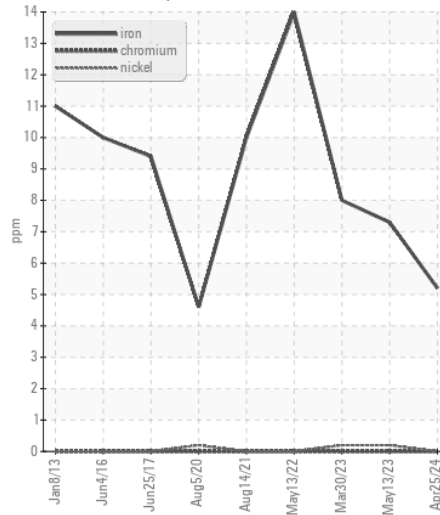

Non-ferrous Metals

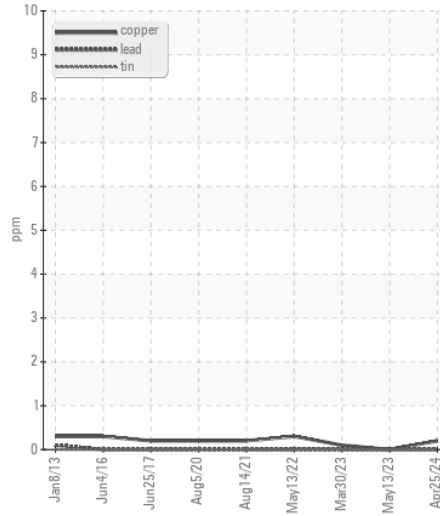

Viscosity @ 40°C

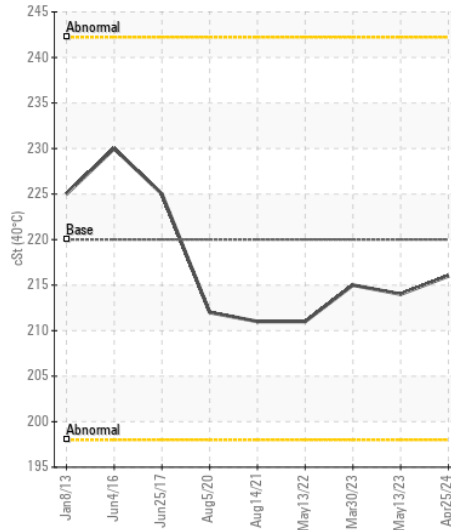

Laboratory : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9
Sample No. : WC0494629
Lab Number : 02632622
Unique Number : 5773775
Test Package : MAR 1
Received : 01 May 2024
Tested : 01 May 2024
Diagnosed : 01 May 2024 - Wes Davis

DFO, CCGS EARL GREY
 PO BOX 1006, 1 CHALLENGER DR.
 DARTMOUTH, NS
 CA B2Y 4A2
 Contact: Chief Engineer
 earlgreyCE@EGR.ccggs-ngcc.gc.ca
 T: (902)456-9285
 F: (902)456-9285

To discuss this sample report, contact Customer Service at 1-800-268-2131.
 Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab.
 Validity of results and interpretation are based on the sample and information as supplied.