



LIEBHERR

OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL



Machine Id
100881
Component
Diesel Engine
Fluid
PETRO CANADA 10W40 (--- GAL)

RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		LH0289628	LH0278805	LH0153886
Sample Date		Client Info		01 May 2024	20 Nov 2023	16 Jun 2023
Machine Age	hrs	Client Info		6972	6420	5929
Oil Age	hrs	Client Info		0	0	0
Filter Age	hrs	Client Info		0	0	0
Oil Changed		Client Info		Changed	Changed	Changed
Filter Changed		Client Info		N/A	N/A	Changed
Sample Status				NORMAL	NORMAL	NORMAL

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185(m)	>66	3	3	3
Chromium	ppm	ASTM D5185(m)	>4	0	0	<1
Nickel	ppm	ASTM D5185(m)	>4	0	0	<1
Titanium	ppm	ASTM D5185(m)		<1	0	<1
Silver	ppm	ASTM D5185(m)	>3	0	<1	<1
Aluminum	ppm	ASTM D5185(m)	>8	1	1	1
Lead	ppm	ASTM D5185(m)	>10	0	<1	<1
Copper	ppm	ASTM D5185(m)	>74	2	2	1
Tin	ppm	ASTM D5185(m)	>4	0	<1	0
Vanadium	ppm	ASTM D5185(m)		0	0	0

CONTAMINATION












There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185(m)	>15	5	6	6
Potassium	ppm	ASTM D5185(m)	>20	15	0	<1
Fuel		WC Method	>5	<1.0	<1.0	<1.0
Water		WC Method	>0.2	NEG	NEG	NEG
Glycol	%	ASTM D7922*		0.0	NEG	NEG
Soot %	%	ASTM D7844*	>3	0	0	0
Nitration	Abs/cm	ASTM D7624*	>20	8.6	8.4	8.1
Sulfation	Abs/.1mm	ASTM D7415*	>30	18.7	18.8	18.4
Emulsified Water	scalar	Visual*	>0.2	NEG	NEG	NEG

FLUID CONDITION

The condition of the oil is acceptable for the time in service.

Sodium	ppm	ASTM D5185(m)	>20	6	2	2
Boron	ppm	ASTM D5185(m)		2	2	7
Barium	ppm	ASTM D5185(m)		0	<1	0
Molybdenum	ppm	ASTM D5185(m)		58	59	56
Manganese	ppm	ASTM D5185(m)		0	0	<1
Magnesium	ppm	ASTM D5185(m)		965	992	977
Calcium	ppm	ASTM D5185(m)		1039	1089	1004
Phosphorus	ppm	ASTM D5185(m)		983	1023	1071
Zinc	ppm	ASTM D5185(m)		1153	1226	1160
Sulfur	ppm	ASTM D5185(m)		2477	2629	2578
Oxidation	Abs/.1mm	ASTM D7414*	>25	16.1	15.8	15.6
Visc @ 100°C	cSt	ASTM D7279(m)		13.5	13.3	13.3

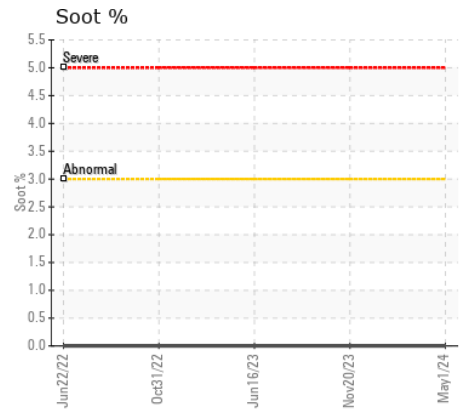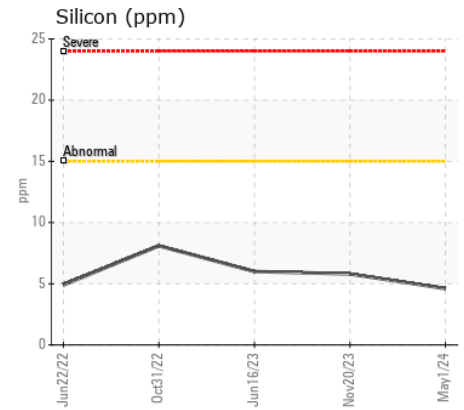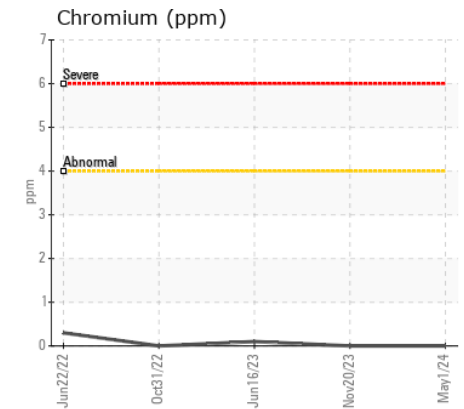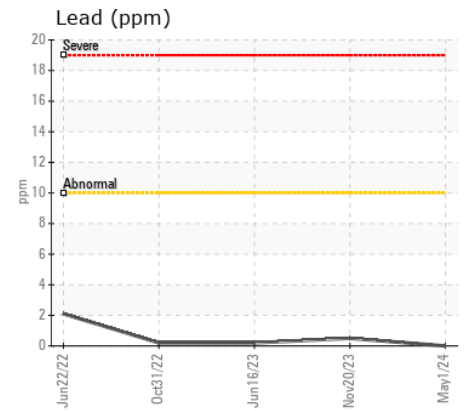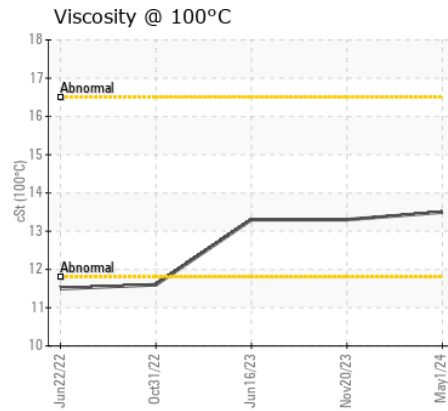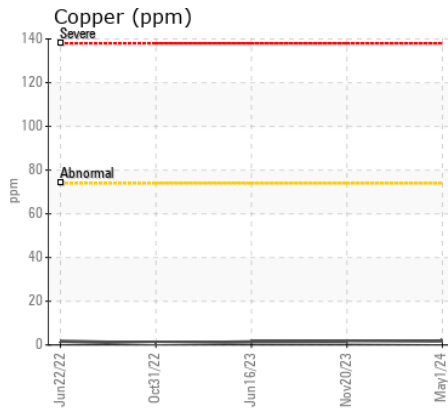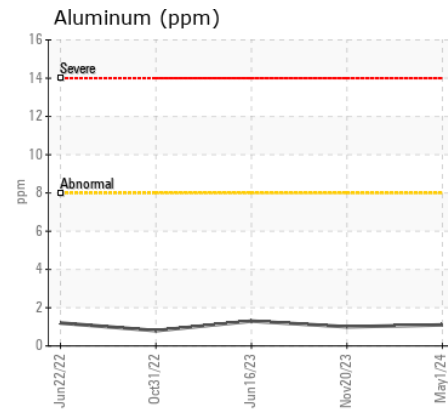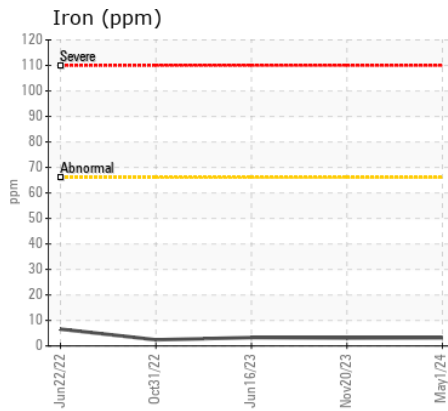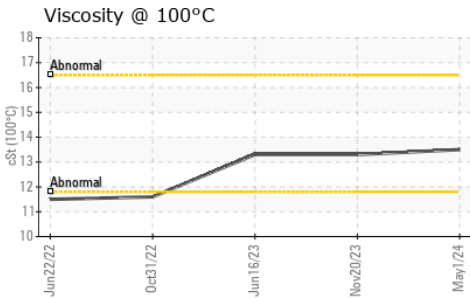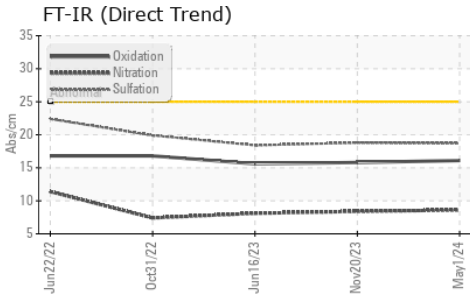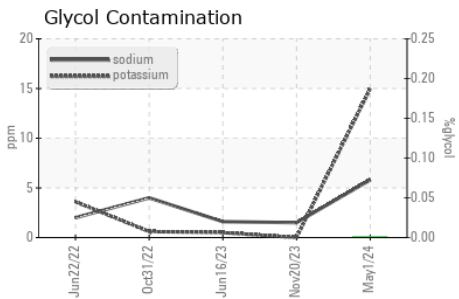

ISO 17025:2017
Accredited
Laboratory

Laboratory : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9
Sample No. : LH0289628 **Received** : 02 May 2024
Lab Number : 02632656 **Tested** : 02 May 2024
Unique Number : 5773809 **Diagnosed** : 02 May 2024 - Wes Davis
Test Package : MOB 1 (Additional Tests: Glycol)

To discuss this sample report, contact Customer Service at 1-800-268-2131.
 Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab.
 Validity of results and interpretation are based on the sample and information as supplied.

American Iron and Metal
 2555 Sheffield Road
 Ottawa, ON
 CA K1B 3V6
 Contact: Marc Giguere
 magiguere@aim-global.com
 T: (438)334-4682
 F: (613)745-0692