



OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Machine Id
1519
 Component
Diesel Engine
 Fluid
DIESEL ENGINE OIL SAE 15W40 (--- GAL)

RECOMMENDATION

Resample at the next service interval to monitor. Please specify the component make and model with your next sample.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		PC0083285	PC0078430	PC0077642
Sample Date		Client Info		01 May 2024	10 Dec 2023	25 Jul 2023
Machine Age	hrs	Client Info		3280	2832	2327
Oil Age	hrs	Client Info		0	0	0
Filter Age	hrs	Client Info		0	0	0
Oil Changed		Client Info		N/A	N/A	N/A
Filter Changed		Client Info		N/A	N/A	N/A
Sample Status				NORMAL	NORMAL	NORMAL

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185(m)	>100	12	17	17
Chromium	ppm	ASTM D5185(m)	>20	0	0	<1
Nickel	ppm	ASTM D5185(m)	>4	0	0	<1
Titanium	ppm	ASTM D5185(m)		0	0	0
Silver	ppm	ASTM D5185(m)	>3	0	<1	<1
Aluminum	ppm	ASTM D5185(m)	>20	3	6	9
Lead	ppm	ASTM D5185(m)	>40	0	<1	<1
Copper	ppm	ASTM D5185(m)	>330	1	2	2
Tin	ppm	ASTM D5185(m)	>15	0	<1	<1
Vanadium	ppm	ASTM D5185(m)		0	0	0

CONTAMINATION












There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185(m)	>25	12	10	8
Potassium	ppm	ASTM D5185(m)	>20	5	13	26
Fuel		WC Method	>5	<1.0	<1.0	<1.0
Water		WC Method	>0.2	NEG	NEG	NEG
Glycol		WC Method		NEG	NEG	NEG
Soot %	%	ASTM D7844*	>3	0.1	0.1	0.1
Nitration	Abs/cm	ASTM D7624*	>20	8.0	9.4	9.4
Sulfation	Abs/.1mm	ASTM D7415*	>30	19.2	20.4	23.9
Emulsified Water	scalar	Visual*	>0.2	NEG	NEG	NEG

FLUID CONDITION

The condition of the oil is acceptable for the time in service.

Sodium	ppm	ASTM D5185(m)	>158	1	2	2
Boron	ppm	ASTM D5185(m)	250	3	6	61
Barium	ppm	ASTM D5185(m)	10	0	<1	0
Molybdenum	ppm	ASTM D5185(m)	100	57	54	10
Manganese	ppm	ASTM D5185(m)		<1	0	<1
Magnesium	ppm	ASTM D5185(m)	450	948	871	124
Calcium	ppm	ASTM D5185(m)	3000	1109	1235	2086
Phosphorus	ppm	ASTM D5185(m)	1150	1010	988	1024
Zinc	ppm	ASTM D5185(m)	1350	1185	1207	1163
Sulfur	ppm	ASTM D5185(m)	4250	2530	2511	2845
Oxidation	Abs/.1mm	ASTM D7414*	>25	15.5	17.1	19.1
Visc @ 40°C	cSt	ASTM D7279(m)	115	93.0	93.0	110
Visc @ 100°C	cSt	ASTM D7279(m)	14.4	13.9	13.6	14.6
Viscosity Index (VI)	Scale	ASTM D2270*	126	152	147	136

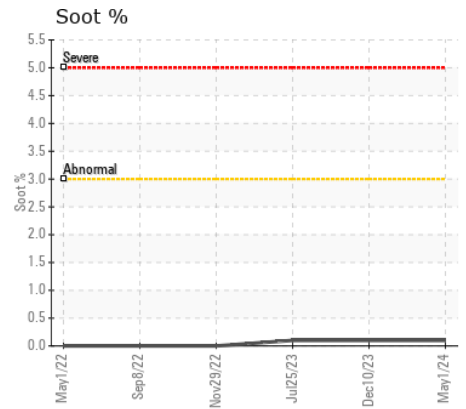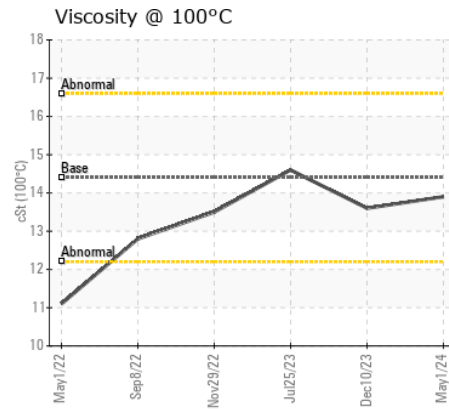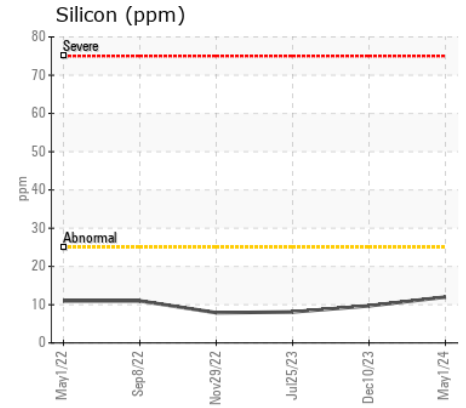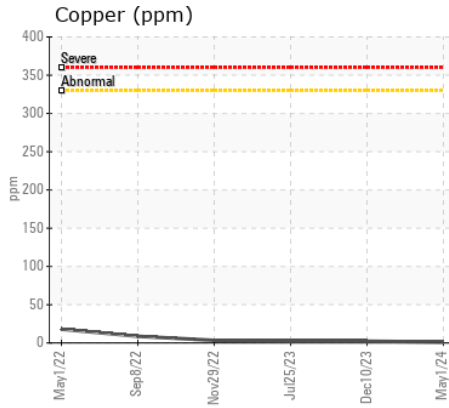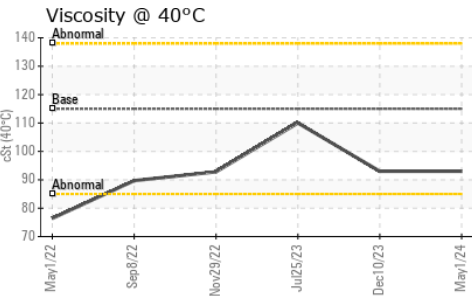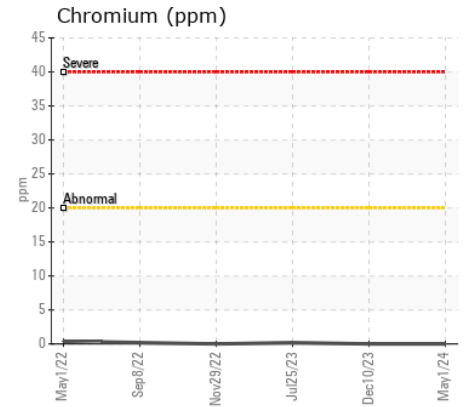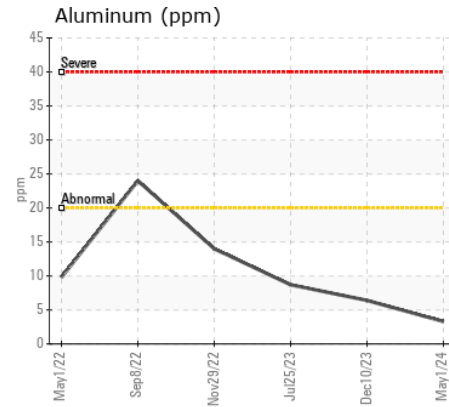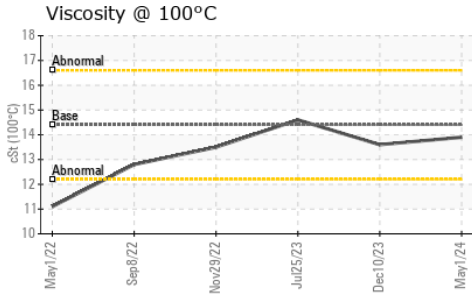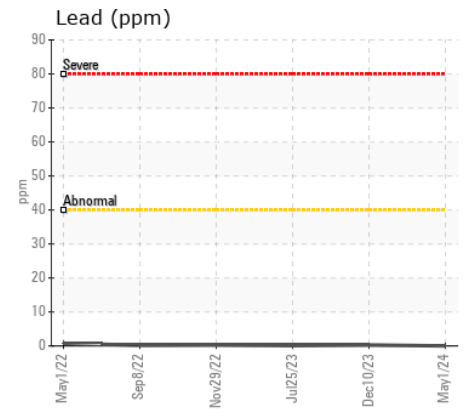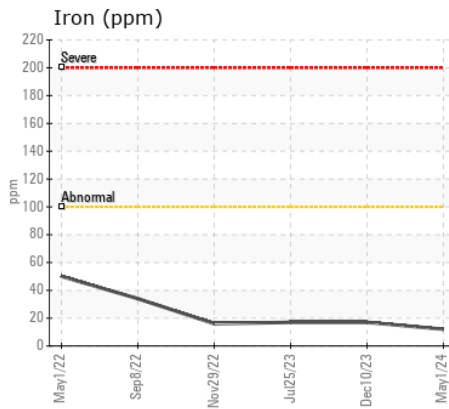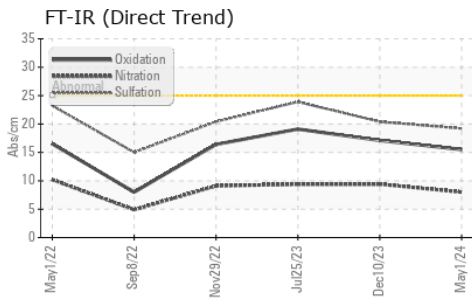

Laboratory : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9
Sample No. : PC0083285
Lab Number : 02632658
Unique Number : 5773811
Test Package : MOB 1 (Additional Tests: KV40, VI)
Received : 02 May 2024
Tested : 02 May 2024
Diagnosed : 02 May 2024 - Wes Davis

LES ENTREPRISES MICHAUVILLE INC.
 270 RUE BRUNET
 MONT ST-HILAIRE, QC
 CA J3H 0M6
 Contact: Martin Trudel
 mtrudel@michaudville.com

To discuss this sample report, contact Customer Service at 1-800-268-2131.
 Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab.
 Validity of results and interpretation are based on the sample and information as supplied.

T:
F: