

Area  
**MICHAUDVILLE [P-28604]**

Machine Id

**1523**

Component

**Diesel Engine**

Fluid

{not provided} (--- GAL)

**RECOMMENDATION**

Resample at the next service interval to monitor. Please specify the component make and model with your next sample. Please specify the brand, type, and viscosity of the oil on your next sample.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		<b>PC0083614</b>	---	---
Sample Date		Client Info		<b>01 May 2024</b>	---	---
Machine Age	hrs	Client Info		<b>506</b>	---	---
Oil Age	hrs	Client Info		<b>0</b>	---	---
Filter Age	hrs	Client Info		<b>0</b>	---	---
Oil Changed		Client Info		<b>N/A</b>	---	---
Filter Changed		Client Info		<b>N/A</b>	---	---
Sample Status				<b>NORMAL</b>	---	---

**WEAR**

Metal levels are typical for a new component breaking in.

Iron	ppm	ASTM D5185(m)	>100	<b>78</b>	---	---
Chromium	ppm	ASTM D5185(m)	>20	<b>&lt;1</b>	---	---
Nickel	ppm	ASTM D5185(m)	>4	<b>&lt;1</b>	---	---
Titanium	ppm	ASTM D5185(m)		<b>&lt;1</b>	---	---
Silver	ppm	ASTM D5185(m)	>3	<b>0</b>	---	---
Aluminum	ppm	ASTM D5185(m)	>20	<b>37</b>	---	---
Lead	ppm	ASTM D5185(m)	>40	<b>&lt;1</b>	---	---
Copper	ppm	ASTM D5185(m)	>330	<b>21</b>	---	---
Tin	ppm	ASTM D5185(m)	>15	<b>&lt;1</b>	---	---
Vanadium	ppm	ASTM D5185(m)		<b>0</b>	---	---
White Metal	scalar	Visual*	NONE	<b>VLITE</b>	---	---
Yellow Metal	scalar	Visual*	NONE	<b>NONE</b>	---	---

**CONTAMINATION**













Elevated aluminum (Al) and/or lead (Pb) and potassium (K) levels in your metals analysis are likely a result of solder flux release into the lubricant and is common on new equipment/components. Tests indicate that there is no fuel present in the oil. There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185(m)	>25	<b>10</b>	---	---
Potassium	ppm	ASTM D5185(m)	>20	<b>127</b>	---	---
Fuel	%	ASTM D7593*	>5	<b>0.0</b>	---	---
Water		WC Method	>0.2	<b>NEG</b>	---	---
Glycol		WC Method		<b>NEG</b>	---	---
Soot %	%	ASTM D7844*	>3	<b>0.1</b>	---	---
Nitration	Abs/cm	ASTM D7624*	>20	<b>10.0</b>	---	---
Sulfation	Abs/.1mm	ASTM D7415*	>30	<b>22.4</b>	---	---
Silt	scalar	Visual*	NONE	<b>NONE</b>	---	---
Debris	scalar	Visual*	NONE	<b>NONE</b>	---	---
Sand/Dirt	scalar	Visual*	NONE	<b>NONE</b>	---	---
Appearance	scalar	Visual*	NORML	<b>NORML</b>	---	---
Odor	scalar	Visual*	NORML	<b>NORML</b>	---	---
Emulsified Water	scalar	Visual*	>0.2	<b>NEG</b>	---	---

**FLUID CONDITION**

Viscosity of sample indicates oil is within SAE 10W30 range, advise investigate. The condition of the oil is acceptable for the time in service.

Sodium	ppm	ASTM D5185(m)		<b>4</b>	---	---
Boron	ppm	ASTM D5185(m)		<b>39</b>	---	---
Barium	ppm	ASTM D5185(m)		<b>2</b>	---	---
Molybdenum	ppm	ASTM D5185(m)		<b>0</b>	---	---
Manganese	ppm	ASTM D5185(m)		<b>2</b>	---	---
Magnesium	ppm	ASTM D5185(m)		<b>748</b>	---	---
Calcium	ppm	ASTM D5185(m)		<b>1339</b>	---	---
Phosphorus	ppm	ASTM D5185(m)		<b>693</b>	---	---
Zinc	ppm	ASTM D5185(m)		<b>786</b>	---	---
Sulfur	ppm	ASTM D5185(m)		<b>2460</b>	---	---
Oxidation	Abs/.1mm	ASTM D7414*	>25	<b>17.2</b>	---	---
Visc @ 40°C	cSt	ASTM D7279(m)		<b>77.7</b>	---	---
Visc @ 100°C	cSt	ASTM D7279(m)		<b>11.4</b>	---	---
Viscosity Index (VI)	Scale	ASTM D2270*		<b>138</b>	---	---

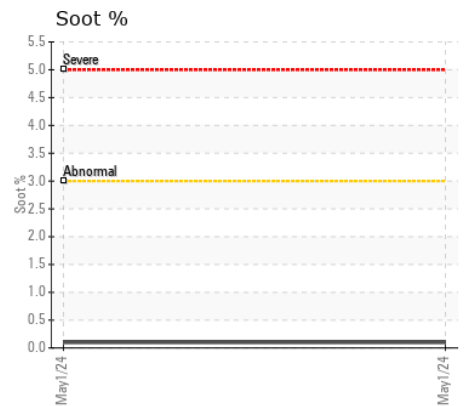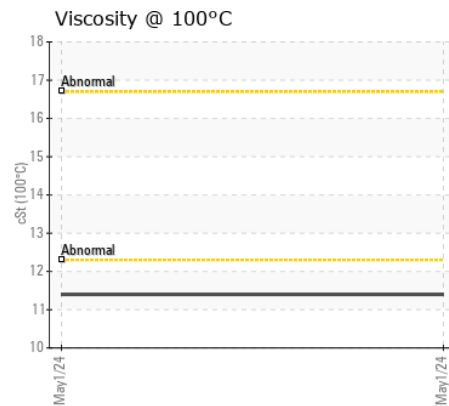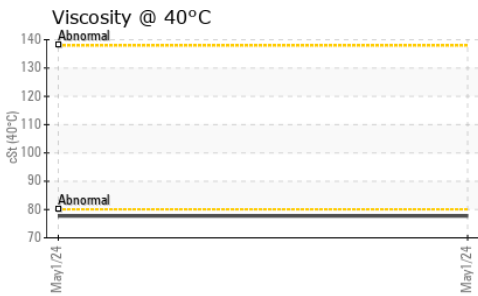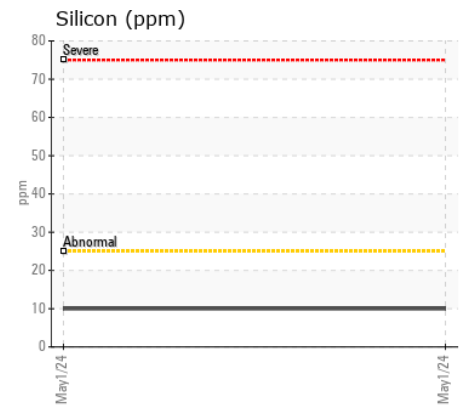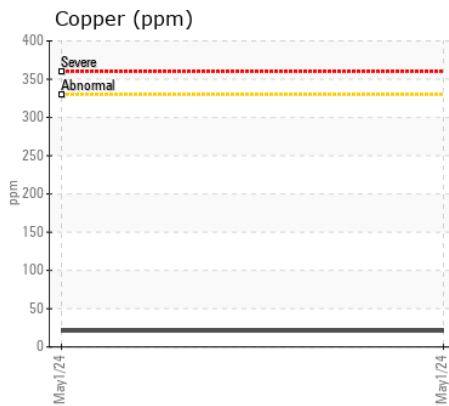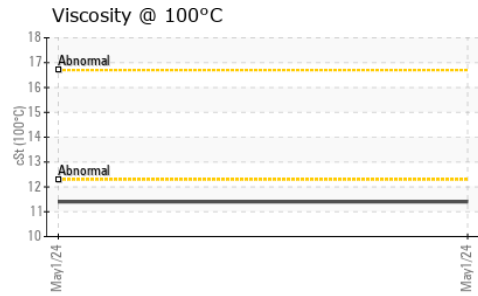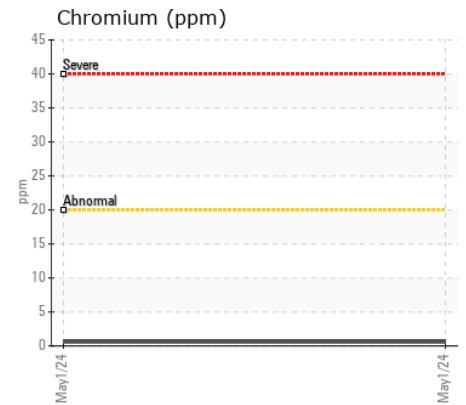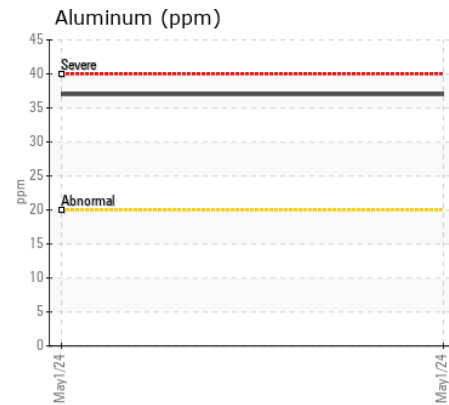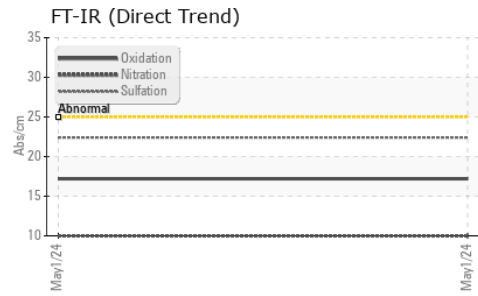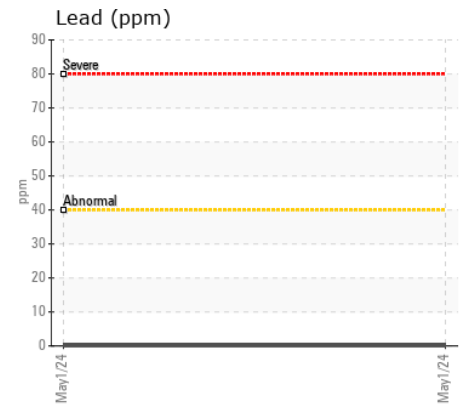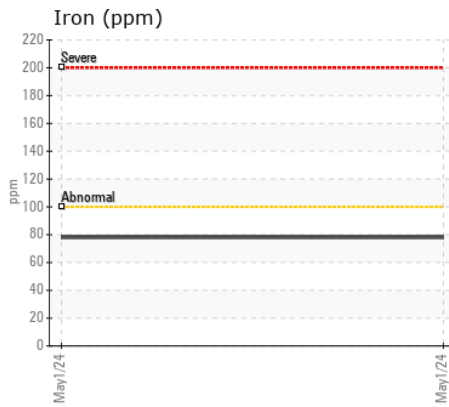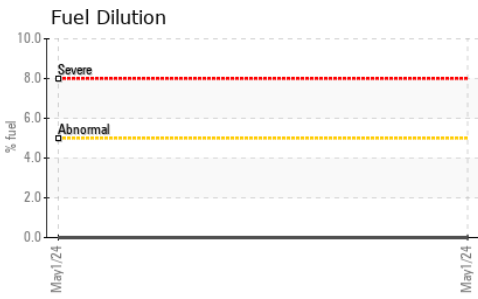

ISO 17025:2017  
Accredited  
Laboratory

**Laboratory** : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9  
**Sample No.** : PC0083614  
**Lab Number** : 02632660  
**Unique Number** : 5773813  
**Test Package** : MOB 1 ( Additional Tests: FuelDilution, KV40, PercentFuel, VI, Visual )

**LES ENTREPRISES MICHAUDVILLE INC.**  
 270 RUE BRUNET  
 MONT ST-HILAIRE, QC  
 CA J3H 0M6  
 Contact: Martin Trudel  
 mtrudel@michaudville.com

To discuss this sample report, contact Customer Service at 1-800-268-2131.  
 Test denoted (\*) outside scope of accreditation, (m) method modified, (e) tested at external lab.  
 Validity of results and interpretation are based on the sample and information as supplied.

T:  
F: