



WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL



Machine Id
901148
Component
Diesel Engine
Fluid
PETRO CANADA DURON SHP 10W30 (--- GAL)

RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		GFL0111772	GFL0111767	GFL0039028
Sample Date		Client Info		13 Apr 2024	08 Feb 2024	11 Nov 2021
Machine Age	hrs	Client Info		9413	0	0
Oil Age	hrs	Client Info		360	0	0
Filter Age	hrs	Client Info		360	0	0
Oil Changed		Client Info		Changed	N/A	Changed
Filter Changed		Client Info		Changed	N/A	Changed
Sample Status				NORMAL	NORMAL	NORMAL

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185(m)	>120	7	10	13
Chromium	ppm	ASTM D5185(m)	>20	0	<1	<1
Nickel	ppm	ASTM D5185(m)	>5	0	<1	<1
Titanium	ppm	ASTM D5185(m)	>2	0	0	0
Silver	ppm	ASTM D5185(m)	>2	0	0	<1
Aluminum	ppm	ASTM D5185(m)	>20	2	2	3
Lead	ppm	ASTM D5185(m)	>40	0	<1	<1
Copper	ppm	ASTM D5185(m)	>330	<1	<1	1
Tin	ppm	ASTM D5185(m)	>15	0	<1	<1
Vanadium	ppm	ASTM D5185(m)		0	0	0
White Metal	scalar	Visual*	NONE	NONE	---	---
Yellow Metal	scalar	Visual*	NONE	NONE	---	---

CONTAMINATION











There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185(m)	>25	3	4	4
Potassium	ppm	ASTM D5185(m)	>20	<1	<1	2
Fuel		WC Method	>3.0	<1.0	<1.0	<1.0
Water		WC Method	>0.2	NEG	NEG	NEG
Glycol		WC Method		NEG	NEG	NEG
Soot %	%	ASTM D7844*	>4	0.4	0.6	0.4
Nitration	Abs/cm	ASTM D7624*	>20	7.3	8.0	6.0
Sulfation	Abs/.1mm	ASTM D7415*	>30	19.2	19.9	18.3
Silt	scalar	Visual*	NONE	NONE	---	---
Debris	scalar	Visual*	NONE	NONE	---	---
Sand/Dirt	scalar	Visual*	NONE	NONE	---	---
Appearance	scalar	Visual*	NORML	NORML	---	---
Odor	scalar	Visual*	NORML	NORML	NORML	NORML
Emulsified Water	scalar	Visual*	>0.2	NEG	NEG	NEG

FLUID CONDITION

The condition of the oil is acceptable for the time in service.

Sodium	ppm	ASTM D5185(m)		2	3	3
Boron	ppm	ASTM D5185(m)	2	6	1	3
Barium	ppm	ASTM D5185(m)	0	0	0	0
Molybdenum	ppm	ASTM D5185(m)	50	61	59	59
Manganese	ppm	ASTM D5185(m)	0	<1	0	<1
Magnesium	ppm	ASTM D5185(m)	950	975	956	1006
Calcium	ppm	ASTM D5185(m)	1050	1058	1055	1056
Phosphorus	ppm	ASTM D5185(m)	995	970	973	1019
Zinc	ppm	ASTM D5185(m)	1180	1144	1150	1218
Sulfur	ppm	ASTM D5185(m)	2600	2411	2413	2377
Oxidation	Abs/.1mm	ASTM D7414*	>25	14.8	15.4	11.4
Visc @ 100°C	cSt	ASTM D7279(m)	12.00	11.2	11.4	11.7

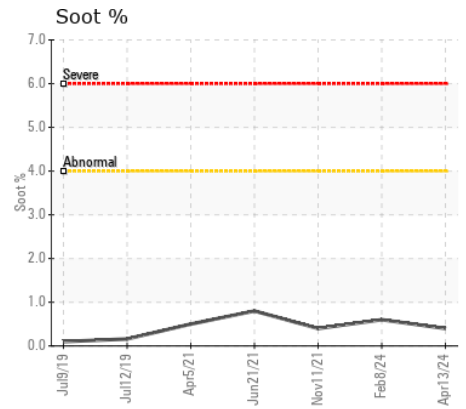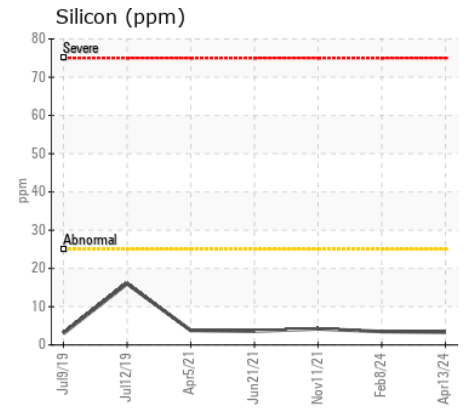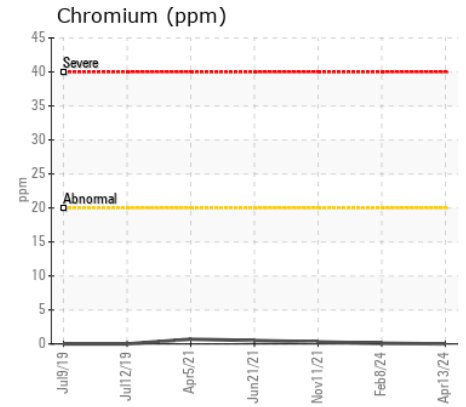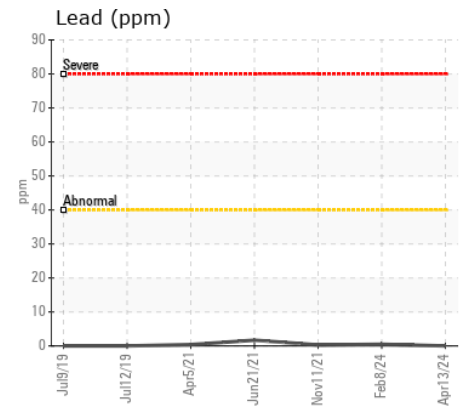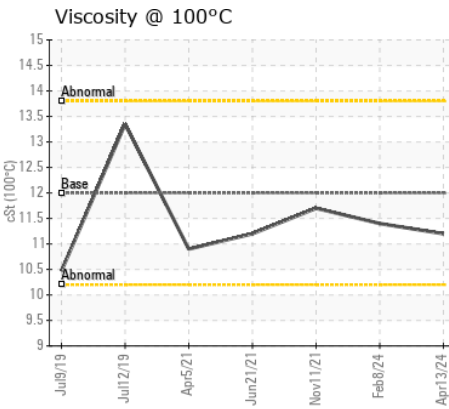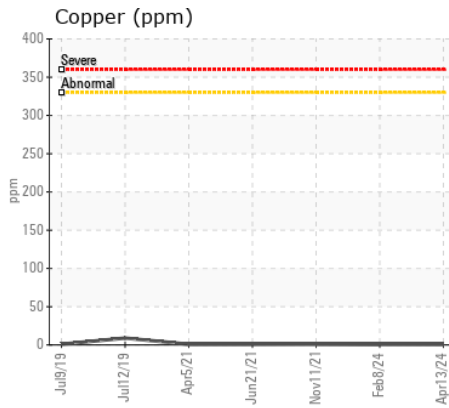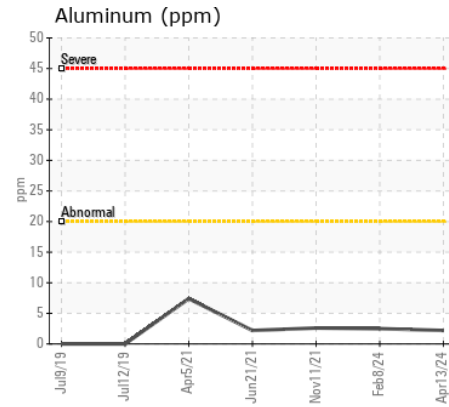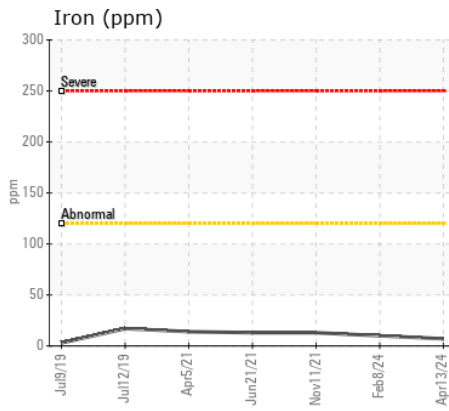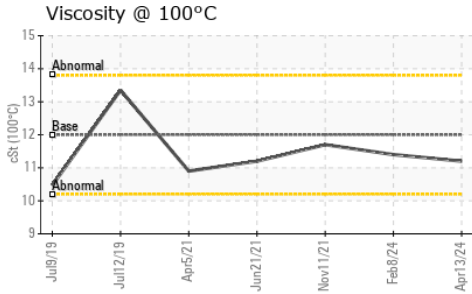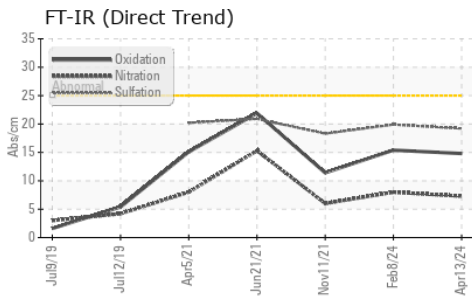

Laboratory : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9
Sample No. : GFL0111772 **Received** : 02 May 2024
Lab Number : 02632728 **Tested** : 02 May 2024
Unique Number : 5773881 **Diagnosed** : 02 May 2024 - Wes Davis
Test Package : MOB 1 (Additional Tests: Visual)

GFL Environmental - 557 - Edson
 6615 - 4th Ave,
 Edson, AB
 CA T7E 1M5
 Contact: GFL Tech
 wcgfldemo@gmail.com

To discuss this sample report, contact Customer Service at 1-800-268-2131.
 Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab.
 Validity of results and interpretation are based on the sample and information as supplied.

T:
F: