



WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Machine Id
WL0055

Component
Front Transmission (Manual)

Fluid
TDTO FLUID SAE 10W (--- GAL)

RECOMMENDATION

Échantillonner de nouveau l'équipement au prochain intervalle de vidange afin d'en surveiller la condition. Veuillez préciser la marque et le modèle du composant lors du prochain échantillon.

WEAR

Les taux d'usure de tous les composants sont normaux.

CONTAMINATION

Il n'y a aucun indice de contamination dans le fluide.

FLUID CONDITION










L'état de le fluide est acceptable pour la durée de service.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		GFL0118305	GFL0067475	GFL0067481
Sample Date		Client Info		29 Apr 2024	17 Oct 2023	14 Sep 2023
Machine Age	kms	Client Info		15859	14365	14119
Oil Age	kms	Client Info		0	0	0
Filter Age	kms	Client Info		0	0	0
Oil Changed		Client Info		N/A	N/A	N/A
Filter Changed		Client Info		N/A	N/A	N/A
Sample Status				NORMAL	NORMAL	ABNORMAL

Iron	ppm	ASTM D5185(m)	>200	7	11	29
Chromium	ppm	ASTM D5185(m)	>5	0	0	0
Nickel	ppm	ASTM D5185(m)	>5	0	<1	<1
Titanium	ppm	ASTM D5185(m)		0	0	0
Silver	ppm	ASTM D5185(m)	>7	0	<1	0
Aluminum	ppm	ASTM D5185(m)	>25	2	<1	<1
Lead	ppm	ASTM D5185(m)	>45	0	1	3
Copper	ppm	ASTM D5185(m)	>225	<1	1	8
Tin	ppm	ASTM D5185(m)	>10	0	0	<1
Vanadium	ppm	ASTM D5185(m)		0	0	0
White Metal	scalar	Visual*	NONE	NONE	NONE	NONE
Yellow Metal	scalar	Visual*	NONE	NONE	NONE	NONE

Silicon	ppm	ASTM D5185(m)	>125	6	7	4
Potassium	ppm	ASTM D5185(m)	>20	1	<1	1
Water		WC Method	>0.1	NEG	NEG	NEG
Silt	scalar	Visual*	NONE	NONE	NONE	NONE
Debris	scalar	Visual*	NONE	NONE	NONE	VLITE
Sand/Dirt	scalar	Visual*	NONE	LIGHT	NONE	NONE
Appearance	scalar	Visual*	NORML	NORML	NORML	NORML
Odor	scalar	Visual*	NORML	NORML	NORML	NORML
Emulsified Water	scalar	Visual*	>0.1	NEG	NEG	NEG

Sodium	ppm	ASTM D5185(m)		2	<1	1
Boron	ppm	ASTM D5185(m)	37	10	65	3
Barium	ppm	ASTM D5185(m)	7	0	0	0
Molybdenum	ppm	ASTM D5185(m)	5	4	2	2
Manganese	ppm	ASTM D5185(m)		0	0	<1
Magnesium	ppm	ASTM D5185(m)	40	79	36	32
Calcium	ppm	ASTM D5185(m)	2650	2985	3344	1341
Phosphorus	ppm	ASTM D5185(m)	1050	950	1067	649
Zinc	ppm	ASTM D5185(m)	1075	1148	1306	733
Sulfur	ppm	ASTM D5185(m)	5750	3166	2910	3601
Visc @ 40°C	cSt	ASTM D7279(m)	40	49.9	49.7	▲ 51.8

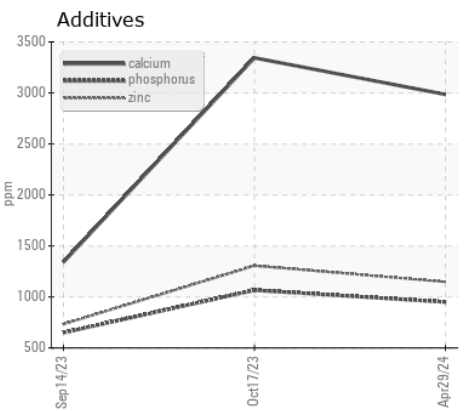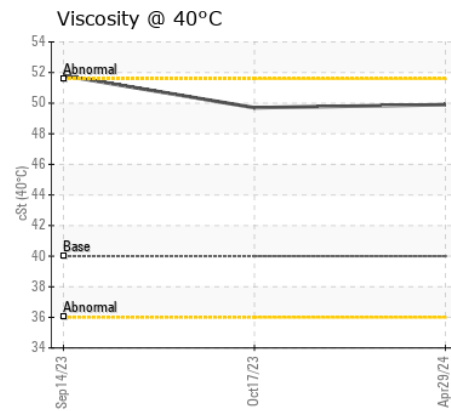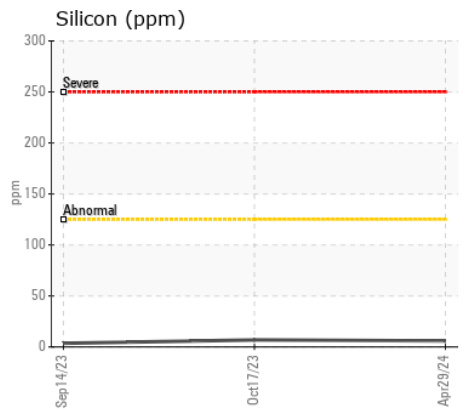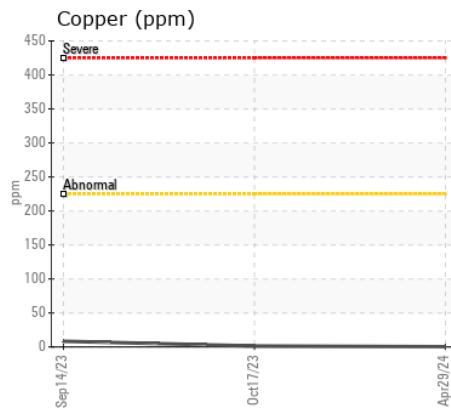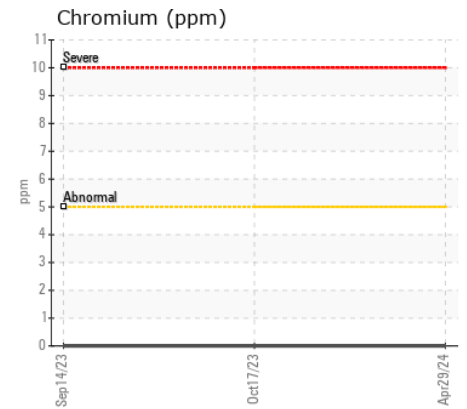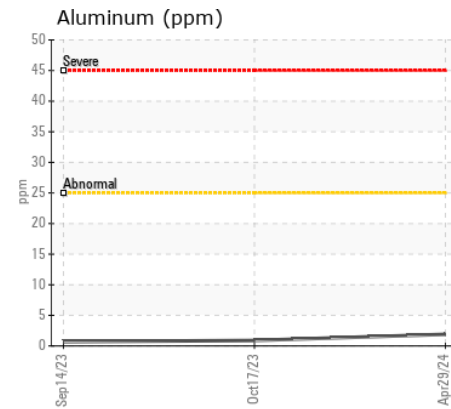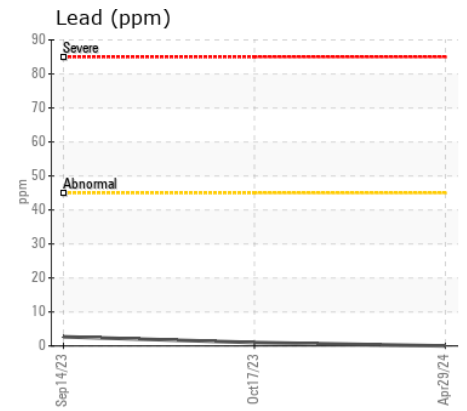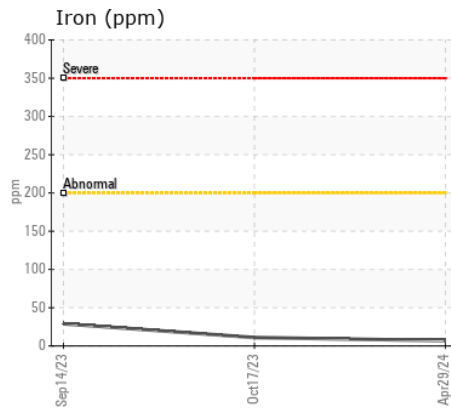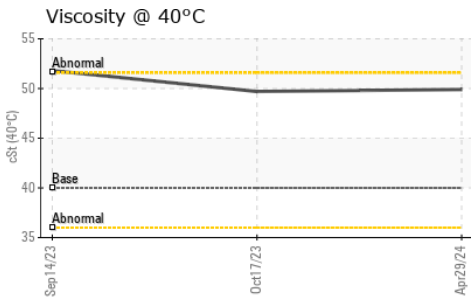

Laboratory : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9
Sample No. : GFL0118305
Lab Number : 02632828
Unique Number : 5773981
Test Package : MOB 1
Received : 02 May 2024
Tested : 02 May 2024
Diagnosed : 02 May 2024 - Wes Davis

GFL Environmental - 743 - Montreal Est CD Processing
 10930 rue Sherbrooke
 Montreal, QC
 CA H1B 1B4
 Contact: Patrick Beaulieu
 patrick.beaulieu@gflenv.com

To discuss this sample report, contact Customer Service at 1-800-268-2131.
 Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab.
 Validity of results and interpretation are based on the sample and information as supplied.

T:
F: