



WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Machine Id
WL0055
Component
Front Differential
Fluid
DIESEL ENGINE OIL SAE 30 (--- GAL)

RECOMMENDATION

Échantillonner de nouveau l'équipement au prochain intervalle de vidange afin d'en surveiller la condition. Le fluide n'était pas spécifié, toutefois, une comparaison avec d'autres fluides indiqua que ce fluide est du (GENERIC) DIESEL ENGINE OIL SAE 30. Veuillez confirmer. Veuillez préciser la marque et le modèle du composant lors du prochain échantillon.

WEAR

Les taux d'usure de tous les composants sont normaux.










CONTAMINATION

Il n'y a aucun indice de contamination dans l'huile.

FLUID CONDITION

L'état de l'huile est acceptable pour la durée de service.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		GFL0118306	GFL0118318	GFL0067530
Sample Date		Client Info		29 Apr 2024	08 Apr 2024	25 Mar 2024
Machine Age	hrs	Client Info		15859	15702	15613
Oil Age	hrs	Client Info		0	0	0
Filter Age	hrs	Client Info		0	0	0
Oil Changed		Client Info		N/A	N/A	N/A
Filter Changed		Client Info		N/A	N/A	N/A
Sample Status				NORMAL	NORMAL	NORMAL
Iron	ppm	ASTM D5185(m)	>500	8	25	38
Chromium	ppm	ASTM D5185(m)	>10	0	0	0
Nickel	ppm	ASTM D5185(m)	>10	0	<1	<1
Titanium	ppm	ASTM D5185(m)		0	0	0
Silver	ppm	ASTM D5185(m)		0	0	0
Aluminum	ppm	ASTM D5185(m)	>25	<1	<1	<1
Lead	ppm	ASTM D5185(m)	>25	0	0	<1
Copper	ppm	ASTM D5185(m)	>100	2	5	6
Tin	ppm	ASTM D5185(m)	>10	0	0	0
Vanadium	ppm	ASTM D5185(m)		0	0	0
White Metal	scalar	Visual*	NONE	NONE	NONE	NONE
Yellow Metal	scalar	Visual*	NONE	NONE	NONE	NONE
Silicon	ppm	ASTM D5185(m)	>75	2	5	4
Potassium	ppm	ASTM D5185(m)	>20	<1	<1	<1
Water		WC Method	>.2	NEG	NEG	NEG
Silt	scalar	Visual*	NONE	NONE	NONE	NONE
Debris	scalar	Visual*	NONE	NONE	NONE	VLITE
Sand/Dirt	scalar	Visual*	NONE	VLITE	VLITE	VLITE
Appearance	scalar	Visual*	NORML	NORML	NORML	NORML
Odor	scalar	Visual*	NORML	NORML	NORML	NORML
Emulsified Water	scalar	Visual*	>.2	NEG	NEG	NEG
Sodium	ppm	ASTM D5185(m)	>75	2	1	1
Boron	ppm	ASTM D5185(m)	250	12	12	12
Barium	ppm	ASTM D5185(m)	10	0	0	0
Molybdenum	ppm	ASTM D5185(m)	100	6	6	8
Manganese	ppm	ASTM D5185(m)		0	<1	0
Magnesium	ppm	ASTM D5185(m)	450	84	110	124
Calcium	ppm	ASTM D5185(m)	3000	2817	2669	2572
Phosphorus	ppm	ASTM D5185(m)	1150	938	876	895
Zinc	ppm	ASTM D5185(m)	1350	1115	1058	1062
Sulfur	ppm	ASTM D5185(m)	4250	3428	3970	4146
Visc @ 40°C	cSt	ASTM D7279(m)	101	63.2	57.3	58.8

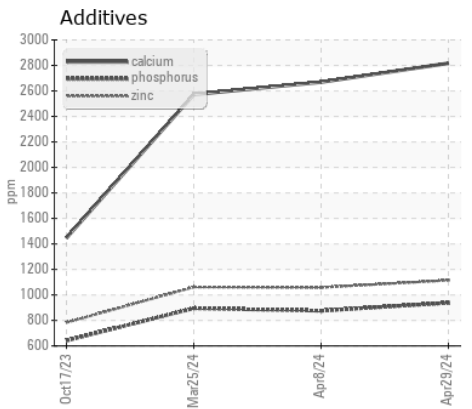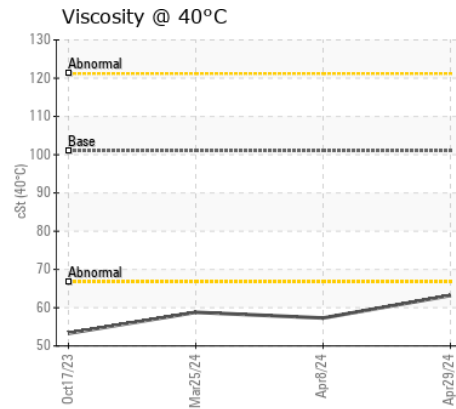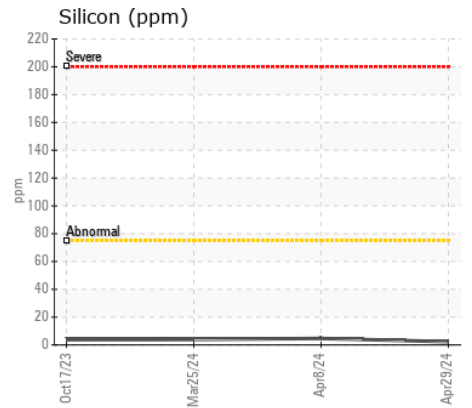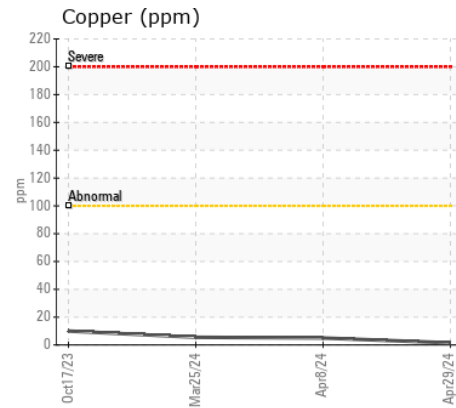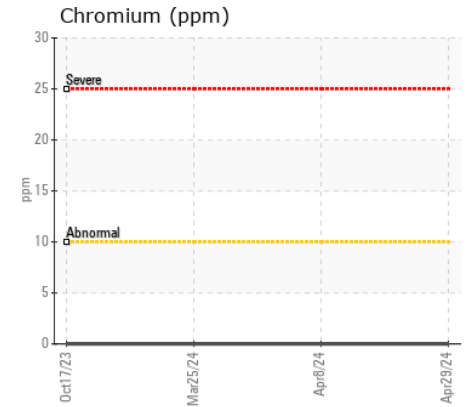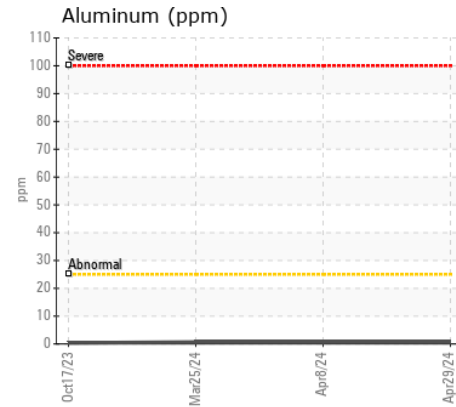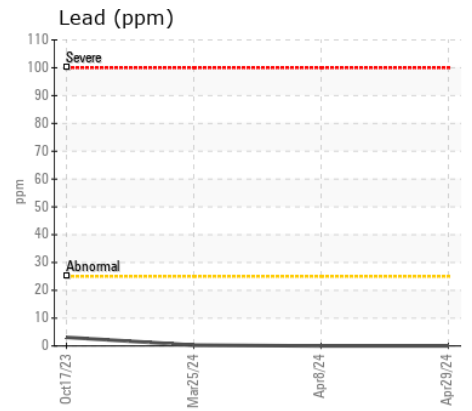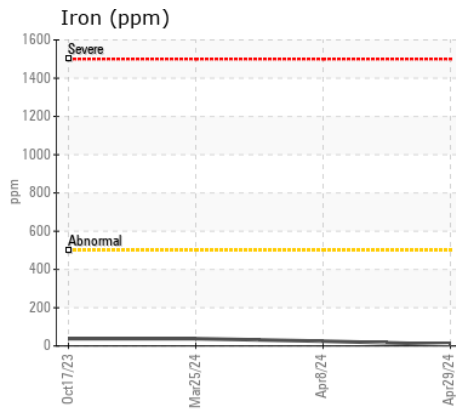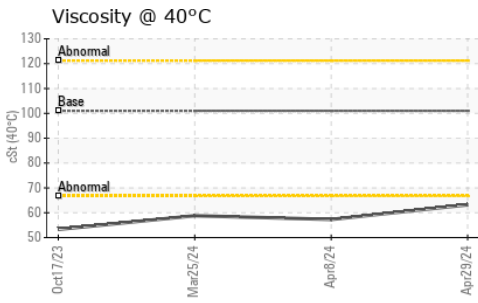

Laboratory : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9
Sample No. : GFL0118306
Lab Number : 02632830
Unique Number : 5773983
Test Package : MOB 1
Received : 02 May 2024
Tested : 02 May 2024
Diagnosed : 02 May 2024 - Wes Davis

GFL Environmental - 743 - Montreal Est CD Processing
 10930 rue Sherbrooke
 Montreal, QC
 CA H1B 1B4
 Contact: Patrick Beaulieu
 patrick.beaulieu@gflenv.com

To discuss this sample report, contact Customer Service at 1-800-268-2131.
 Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab.
 Validity of results and interpretation are based on the sample and information as supplied.

T:
F: