



WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL



Machine Id
819007
Component
Diesel Engine
Fluid
PETRO CANADA DURON SHP 10W30 (--- GAL)

RECOMMENDATION

Confirmez la source du lubrifiant utilisé pour l'appoint/remplissage.
Échantillonner de nouveau l'équipement au prochain intervalle de vidange afin d'en surveiller la condition.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		PC0088242	PC0083796	PC0078540
Sample Date		Client Info		30 Apr 2024	27 Feb 2024	25 Sep 2023
Machine Age	hrs	Client Info		85718	8440	0
Oil Age	hrs	Client Info		0	0	0
Filter Age	hrs	Client Info		0	0	0
Oil Changed		Client Info		Changed	N/A	Changed
Filter Changed		Client Info		Changed	N/A	Changed
Sample Status				NORMAL	NORMAL	NORMAL

WEAR

Les taux d'usure de tous les composants sont normaux.

Iron	ppm	ASTM D5185(m)	>90	13	21	44
Chromium	ppm	ASTM D5185(m)	>20	<1	<1	1
Nickel	ppm	ASTM D5185(m)	>2	0	<1	0
Titanium	ppm	ASTM D5185(m)	>2	0	0	0
Silver	ppm	ASTM D5185(m)	>2	0	0	<1
Aluminum	ppm	ASTM D5185(m)	>20	3	4	11
Lead	ppm	ASTM D5185(m)	>40	0	0	0
Copper	ppm	ASTM D5185(m)	>330	<1	1	2
Tin	ppm	ASTM D5185(m)	>15	0	0	<1
Vanadium	ppm	ASTM D5185(m)		0	0	0
White Metal	scalar	Visual*	NONE	NONE	---	---
Yellow Metal	scalar	Visual*	NONE	NONE	---	---

CONTAMINATION













Il n'y a aucun indice de contamination dans l'huile.

Silicon	ppm	ASTM D5185(m)	>25	3	5	14
Potassium	ppm	ASTM D5185(m)	>20	3	4	12
Fuel		WC Method	>3.0	<1.0	<1.0	<1.0
Water		WC Method	>0.2	NEG	NEG	NEG
Glycol		WC Method		NEG	NEG	NEG
Soot %	%	ASTM D7844*	>6	0	0.5	1.4
Nitration	Abs/cm	ASTM D7624*	>20	2.2	10.1	10.6
Sulfation	Abs/.1mm	ASTM D7415*	>30	6.8	20.8	23.5
Silt	scalar	Visual*	NONE	NONE	---	---
Debris	scalar	Visual*	NONE	NONE	---	---
Sand/Dirt	scalar	Visual*	NONE	NONE	---	---
Appearance	scalar	Visual*	NORML	NORML	---	---
Odor	scalar	Visual*	NORML	NORML	NORML	NORML
Emulsified Water	scalar	Visual*	>0.2	NEG	NEG	NEG

FLUID CONDITION

Les niveaux d'additifs indiquent l'ajout d'une autre marque ou d'un autre type d'huile. L'état de l'huile est acceptable pour la durée de service.

Sodium	ppm	ASTM D5185(m)		6	1	2
Boron	ppm	ASTM D5185(m)	2	19	4	4
Barium	ppm	ASTM D5185(m)	0	0	0	<1
Molybdenum	ppm	ASTM D5185(m)	50	51	61	64
Manganese	ppm	ASTM D5185(m)	0	<1	0	<1
Magnesium	ppm	ASTM D5185(m)	950	638	964	1010
Calcium	ppm	ASTM D5185(m)	1050	1488	1086	1096
Phosphorus	ppm	ASTM D5185(m)	995	775	1019	1013
Zinc	ppm	ASTM D5185(m)	1180	936	1197	1246
Sulfur	ppm	ASTM D5185(m)	2600	1980	2596	2353
Oxidation	Abs/.1mm	ASTM D7414*	>25	3.7	17.8	18.3
Visc @ 40°C	cSt	ASTM D7279(m)	80.1	102	73.1	96.8
Visc @ 100°C	cSt	ASTM D7279(m)	12.00	13.7	11.2	13.5
Viscosity Index (VI)	Scale	ASTM D2270*	144	134	144	139

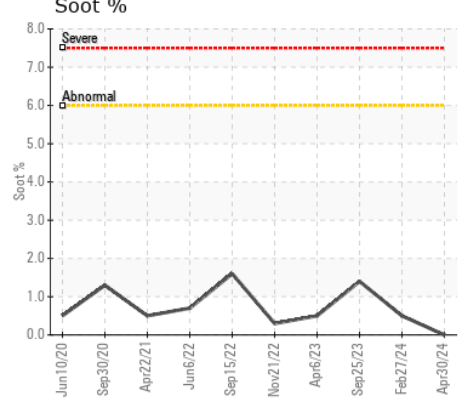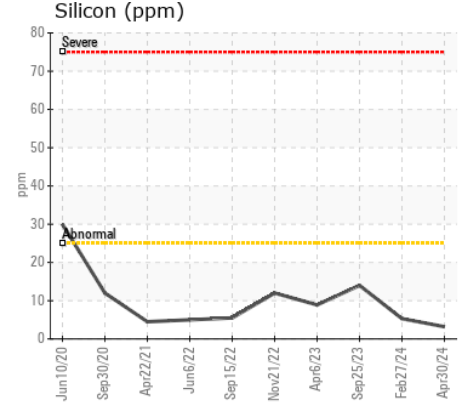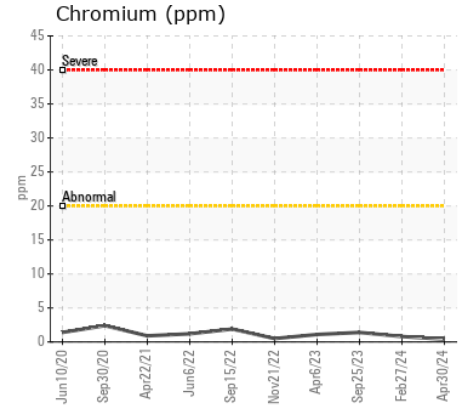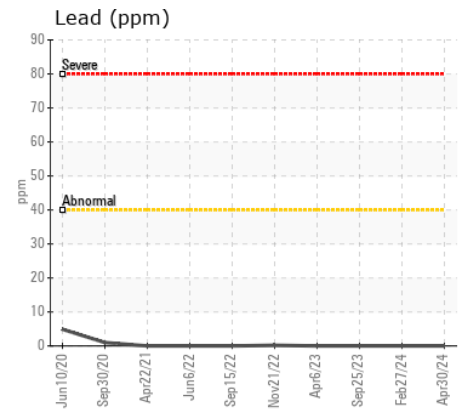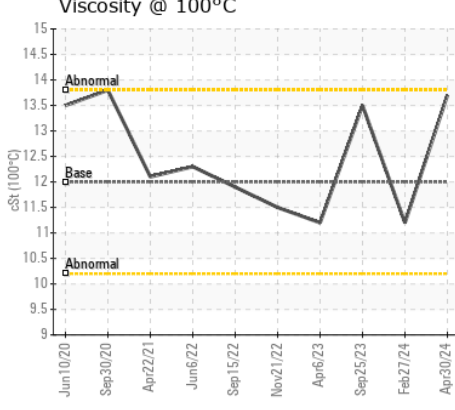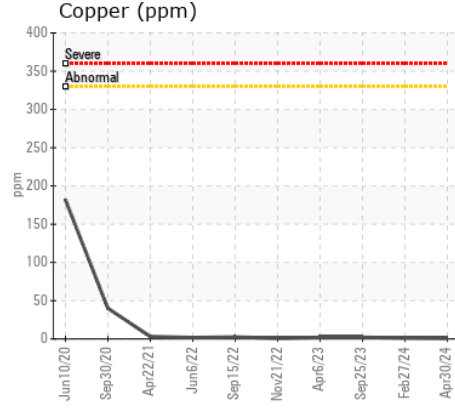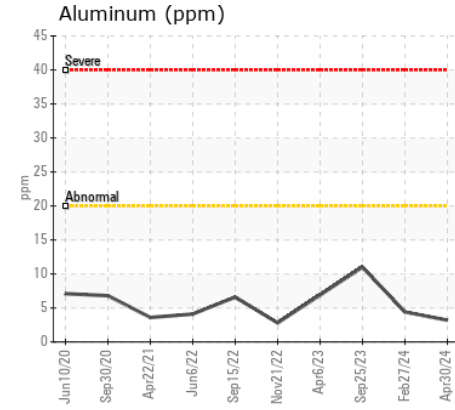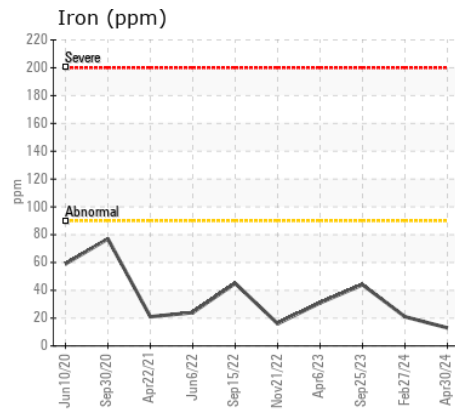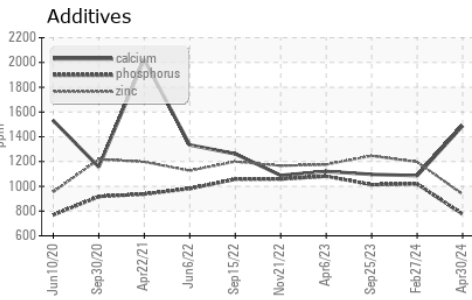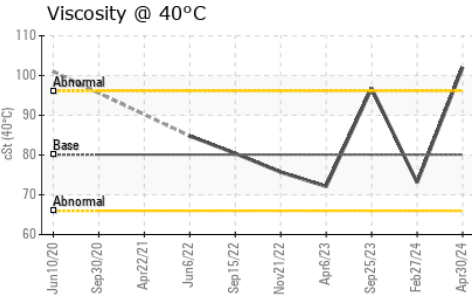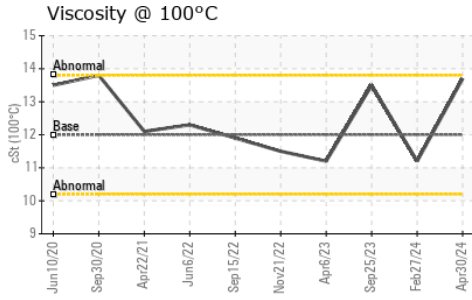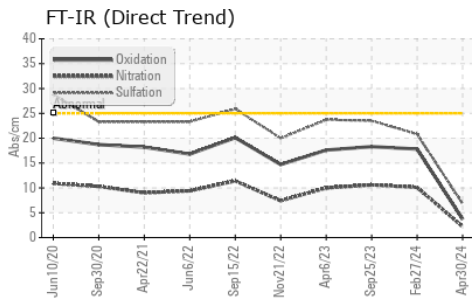

ISO 17025:2017
Accredited
Laboratory

Laboratory : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9
Sample No. : PC0088242
Lab Number : 02633075
Unique Number : 5774228
Test Package : MOB 1 (Additional Tests: KV40, VI, Visual)

Received : 03 May 2024
Tested : 03 May 2024
Diagnosed : 03 May 2024 - Kevin Marson

GFL Environmental - 737 - Quebec City Hauling
 6205 Boul. Wilfrid Hamel,
 Quebec City, QC
 CA G2E 5G8
 Contact: Dave Beaulieu
 davebeaulieu@matrec.ca

To discuss this sample report, contact Customer Service at 1-800-268-2131.
 Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab.
 Validity of results and interpretation are based on the sample and information as supplied.

T:
F: