



WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Machine Id
1525
 Component
Transmission (Auto)
 Fluid
PETRO CANADA DuraDrive HD Synthetic 668 (24 LTR)

RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		PC0082756	PC0061550	PC0052692
Sample Date		Client Info		15 Apr 2024	06 Jul 2023	21 Sep 2022
Machine Age	kms	Client Info		588708	536531	482793
Oil Age	kms	Client Info		52177	53333	55642
Filter Age	kms	Client Info		52177	53333	55642
Oil Changed		Client Info		Changed	Changed	Changed
Filter Changed		Client Info		Changed	Changed	Changed
Sample Status				NORMAL	NORMAL	NORMAL

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185(m)	>230	40	36	59
Chromium	ppm	ASTM D5185(m)	>2	0	0	0
Nickel	ppm	ASTM D5185(m)	>5	0	0	0
Titanium	ppm	ASTM D5185(m)	>2	0	0	0
Silver	ppm	ASTM D5185(m)	>5	0	<1	0
Aluminum	ppm	ASTM D5185(m)	>65	20	15	21
Lead	ppm	ASTM D5185(m)	>55	2	2	4
Copper	ppm	ASTM D5185(m)	>85	13	12	19
Tin	ppm	ASTM D5185(m)	>5	2	2	2
Vanadium	ppm	ASTM D5185(m)		0	0	0
White Metal	scalar	Visual*	NONE	NONE	NONE	NONE
Yellow Metal	scalar	Visual*	NONE	NONE	NONE	NONE

CONTAMINATION











There is no indication of any contamination in the fluid.

Silicon	ppm	ASTM D5185(m)	>20	4	5	8
Potassium	ppm	ASTM D5185(m)	>20	1	2	3
Water		WC Method	>0.1	NEG	NEG	NEG
Silt	scalar	Visual*	NONE	NONE	NONE	NONE
Debris	scalar	Visual*	NONE	NONE	NONE	NONE
Sand/Dirt	scalar	Visual*	NONE	NONE	NONE	NONE
Appearance	scalar	Visual*	NORML	NORML	NORML	NORML
Odor	scalar	Visual*	NORML	NORML	NORML	NORML
Emulsified Water	scalar	Visual*	>0.1	NEG	NEG	NEG

FLUID CONDITION

The condition of the fluid is acceptable for the time in service.

Sodium	ppm	ASTM D5185(m)		4	4	8
Boron	ppm	ASTM D5185(m)	78	58	63	51
Barium	ppm	ASTM D5185(m)		0	0	0
Molybdenum	ppm	ASTM D5185(m)	0	0	<1	<1
Manganese	ppm	ASTM D5185(m)		<1	<1	1
Magnesium	ppm	ASTM D5185(m)	0	2	1	5
Calcium	ppm	ASTM D5185(m)	113	117	108	120
Phosphorus	ppm	ASTM D5185(m)	222	215	229	224
Zinc	ppm	ASTM D5185(m)		7	7	13
Sulfur	ppm	ASTM D5185(m)	1326	1462	1588	1515
Visc @ 40°C	cSt	ASTM D7279(m)	34.8	32.9	33.2	33.2
Visc @ 100°C	cSt	ASTM D7279(m)	7.0	6.5	6.6	6.6
Viscosity Index (VI)	Scale	ASTM D2270*	167	155	158	158

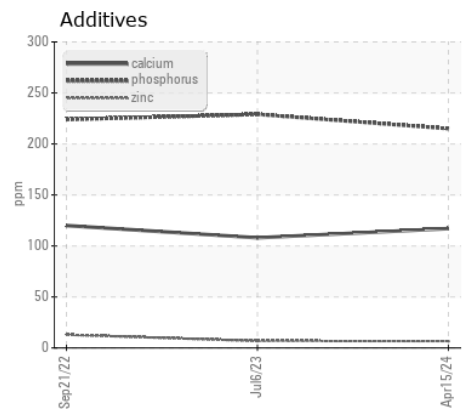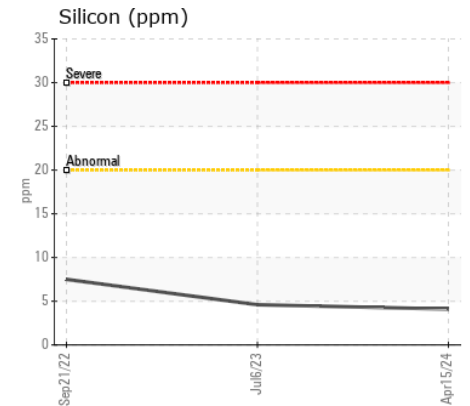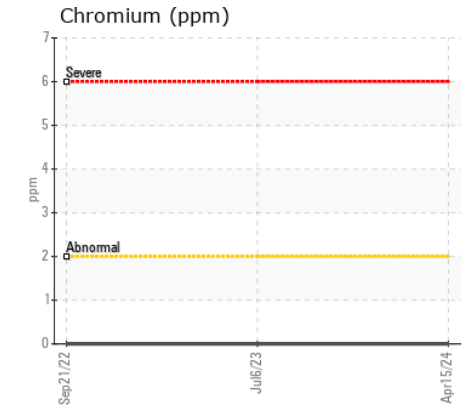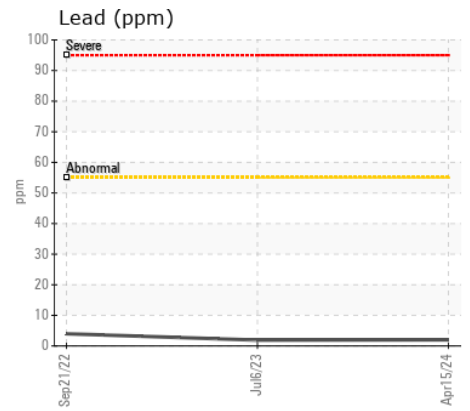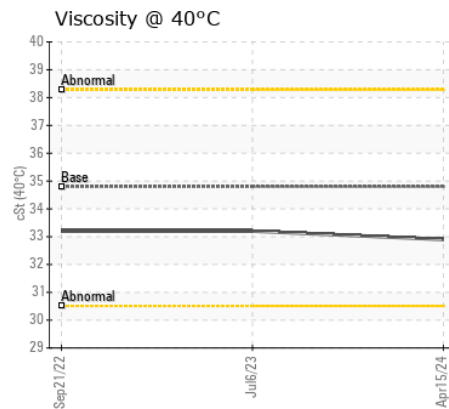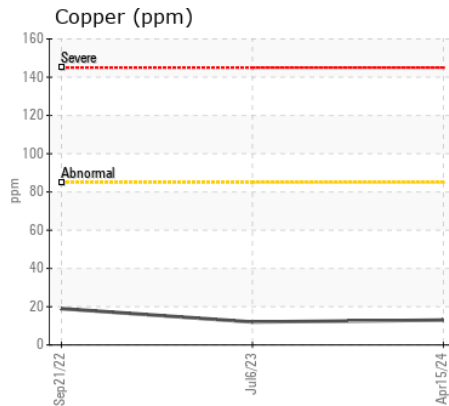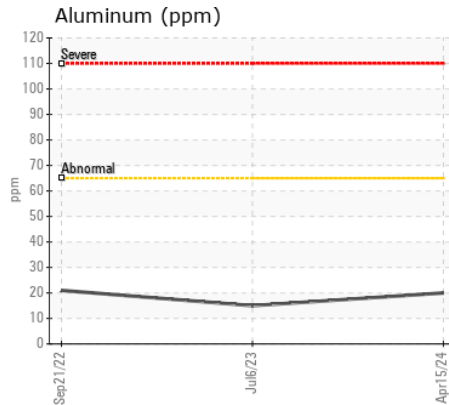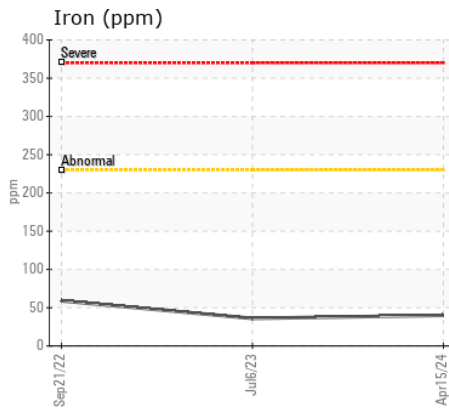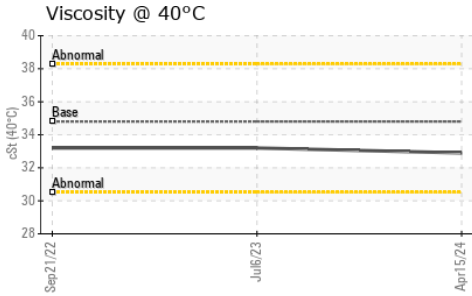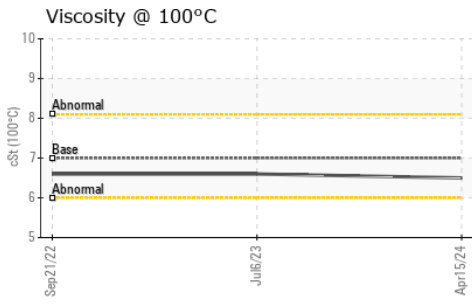

ISO 17025:2017
Accredited
Laboratory

Laboratory : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9
Sample No. : PC0082756 **Received** : 03 May 2024
Lab Number : 02633187 **Tested** : 03 May 2024
Unique Number : 5774340 **Diagnosed** : 03 May 2024 - Wes Davis
Test Package : MOB 1 (Additional Tests: KV100, VI)

To discuss this sample report, contact Customer Service at 1-800-268-2131.
 Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab.
 Validity of results and interpretation are based on the sample and information as supplied.

Metrobus Transit
 25 Messenger Drive
 St. John's, NL
 CA A1B 0H6
 Contact: Dan Finlay
 dan.finlay@metrobus.com

T:
F: