



VOLVO

OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL



Area
[401932]
 Machine Id
VOLVO L110E 61024
 Component
Transmission (Auto)
 Fluid
VOLVO AT 101 (--- GAL)

RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		VCP450495	---	---
Sample Date		Client Info		19 Apr 2024	---	---
Machine Age	hrs	Client Info		8000	---	---
Oil Age	hrs	Client Info		0	---	---
Filter Age	hrs	Client Info		0	---	---
Oil Changed		Client Info		Changed	---	---
Filter Changed		Client Info		Changed	---	---
Sample Status				NORMAL	---	---

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185(m)	>160	85	---	---
Chromium	ppm	ASTM D5185(m)	>5	0	---	---
Nickel	ppm	ASTM D5185(m)	>5	0	---	---
Titanium	ppm	ASTM D5185(m)		0	---	---
Silver	ppm	ASTM D5185(m)	>5	0	---	---
Aluminum	ppm	ASTM D5185(m)	>50	3	---	---
Lead	ppm	ASTM D5185(m)	>50	0	---	---
Copper	ppm	ASTM D5185(m)	>225	<1	---	---
Tin	ppm	ASTM D5185(m)	>10	0	---	---
Vanadium	ppm	ASTM D5185(m)		0	---	---
White Metal	scalar	Visual*	NONE	NONE	---	---
Yellow Metal	scalar	Visual*	NONE	NONE	---	---

CONTAMINATION










There is no indication of any contamination in the fluid.

Silicon	ppm	ASTM D5185(m)	>20	15	---	---
Potassium	ppm	ASTM D5185(m)	>20	1	---	---
Water		WC Method	>0.1	NEG	---	---
Silt	scalar	Visual*	NONE	NONE	---	---
Debris	scalar	Visual*	NONE	NONE	---	---
Sand/Dirt	scalar	Visual*	NONE	NONE	---	---
Appearance	scalar	Visual*	NORML	NORML	---	---
Odor	scalar	Visual*	NORML	NORML	---	---
Emulsified Water	scalar	Visual*	>0.1	NEG	---	---

FLUID CONDITION

The condition of the fluid is acceptable for the time in service.

Sodium	ppm	ASTM D5185(m)		2	---	---
Boron	ppm	ASTM D5185(m)		95	---	---
Barium	ppm	ASTM D5185(m)		0	---	---
Molybdenum	ppm	ASTM D5185(m)		0	---	---
Manganese	ppm	ASTM D5185(m)		1	---	---
Magnesium	ppm	ASTM D5185(m)		2	---	---
Calcium	ppm	ASTM D5185(m)		88	---	---
Phosphorus	ppm	ASTM D5185(m)		207	---	---
Zinc	ppm	ASTM D5185(m)		9	---	---
Sulfur	ppm	ASTM D5185(m)		783	---	---
Visc @ 40°C	cSt	ASTM D7279(m)		26.9	---	---

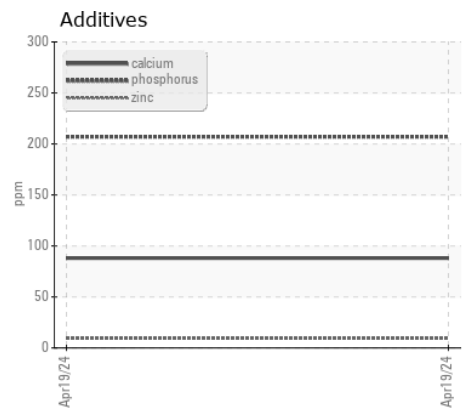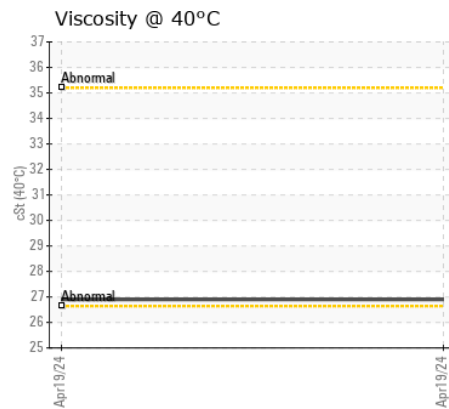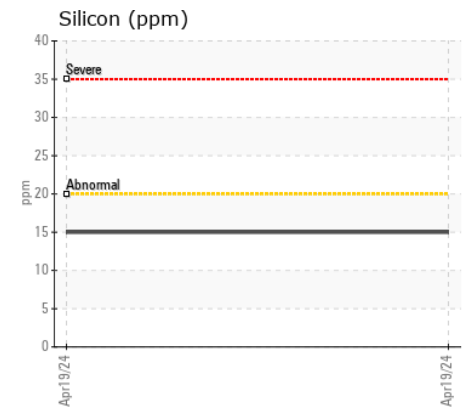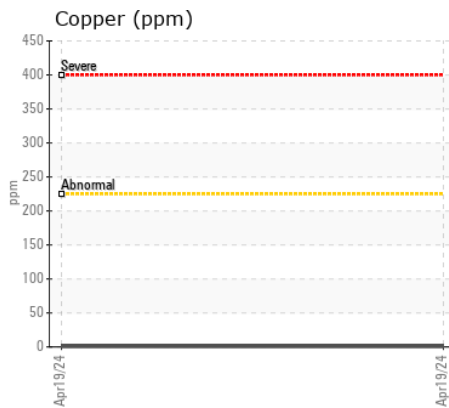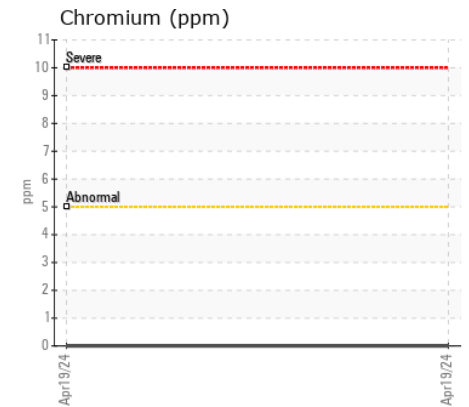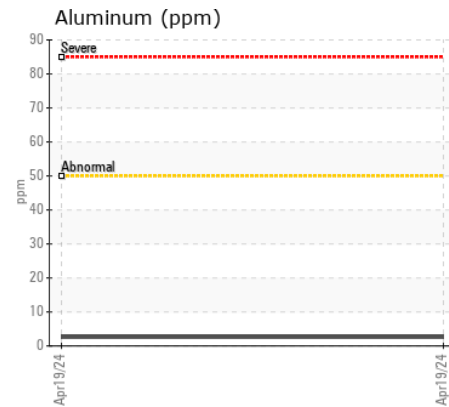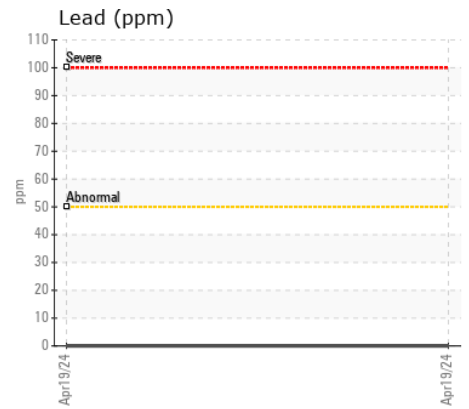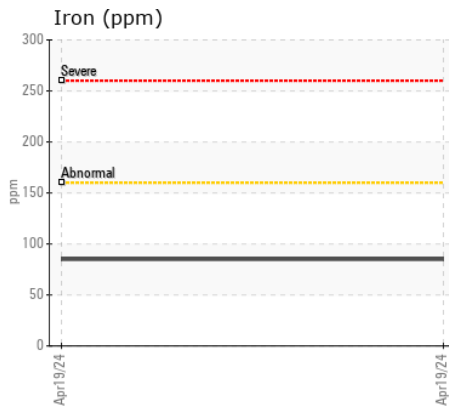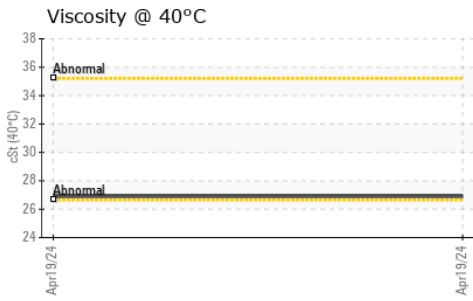

Laboratory : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9
Sample No. : VCP450495 **Received** : 03 May 2024
Lab Number : 02633191 **Tested** : 03 May 2024
Unique Number : 5774344 **Diagnosed** : 03 May 2024 - Kevin Marson
Test Package : MOB 1

STRONGCO EQUIPMENT
 54 IBER ROAD
 OTTAWA, ON
 CA K2S 1E8
 Contact: Daniel Simard
 dsimard@strongco.com
 T: (613)836-6633
 F: (613)836-2614

To discuss this sample report, contact Customer Service at 1-800-268-2131.
 Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab.
 Validity of results and interpretation are based on the sample and information as supplied.