



WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL



Machine Id
833113

Component
Transmission

Fluid
PETRO CANADA DURON GEO LD 15W40 (--- GAL)

RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		GFL0112493	---	---
Sample Date		Client Info		29 Apr 2024	---	---
Machine Age	days	Client Info		2125	---	---
Oil Age	days	Client Info		0	---	---
Filter Age	days	Client Info		0	---	---
Oil Changed		Client Info		Changed	---	---
Filter Changed		Client Info		Changed	---	---
Sample Status				NORMAL	---	---

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185(m)	>320	22	---	---
Chromium	ppm	ASTM D5185(m)	>5	1	---	---
Nickel	ppm	ASTM D5185(m)	>5	<1	---	---
Titanium	ppm	ASTM D5185(m)		0	---	---
Silver	ppm	ASTM D5185(m)		0	---	---
Aluminum	ppm	ASTM D5185(m)	>50	3	---	---
Lead	ppm	ASTM D5185(m)	>65	<1	---	---
Copper	ppm	ASTM D5185(m)	>95	3	---	---
Tin	ppm	ASTM D5185(m)	>6	<1	---	---
Vanadium	ppm	ASTM D5185(m)		0	---	---
White Metal	scalar	Visual*	NONE	NONE	---	---
Yellow Metal	scalar	Visual*	NONE	NONE	---	---

CONTAMINATION










There is no indication of any contamination in the fluid.

Silicon	ppm	ASTM D5185(m)	>65	6	---	---
Potassium	ppm	ASTM D5185(m)	>20	4	---	---
Water		WC Method	>0.1	NEG	---	---
Silt	scalar	Visual*	NONE	NONE	---	---
Debris	scalar	Visual*	NONE	NONE	---	---
Sand/Dirt	scalar	Visual*	NONE	NONE	---	---
Appearance	scalar	Visual*	NORML	NORML	---	---
Odor	scalar	Visual*	NORML	NORML	---	---
Emulsified Water	scalar	Visual*	>0.1	NEG	---	---

FLUID CONDITION

The condition of the fluid is acceptable for the time in service.

Sodium	ppm	ASTM D5185(m)		9	---	---
Boron	ppm	ASTM D5185(m)	50	8	---	---
Barium	ppm	ASTM D5185(m)	5	<1	---	---
Molybdenum	ppm	ASTM D5185(m)	50	64	---	---
Manganese	ppm	ASTM D5185(m)	0	<1	---	---
Magnesium	ppm	ASTM D5185(m)	560	712	---	---
Calcium	ppm	ASTM D5185(m)	1510	1782	---	---
Phosphorus	ppm	ASTM D5185(m)	780	790	---	---
Zinc	ppm	ASTM D5185(m)	870	1069	---	---
Sulfur	ppm	ASTM D5185(m)	2040	2092	---	---
Visc @ 40°C	cSt	ASTM D7279(m)	117.0	114	---	---

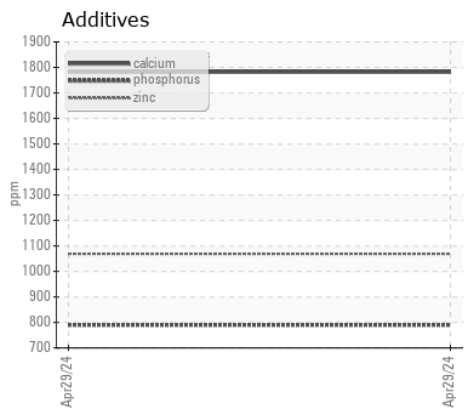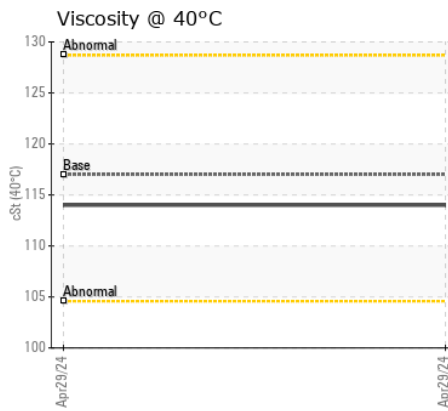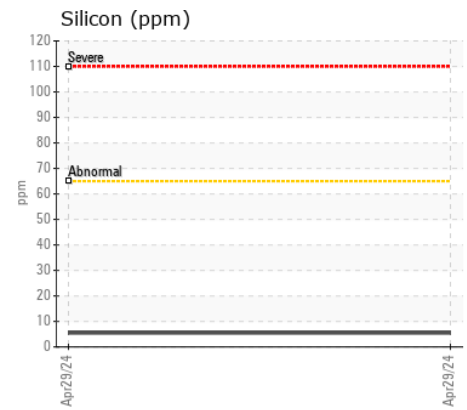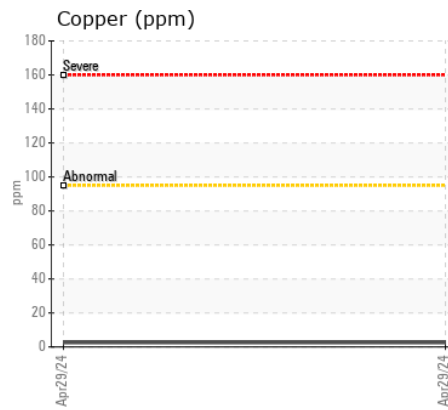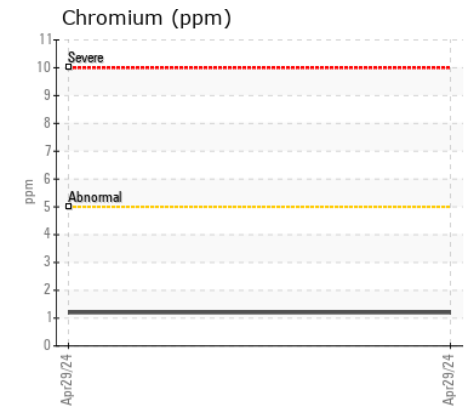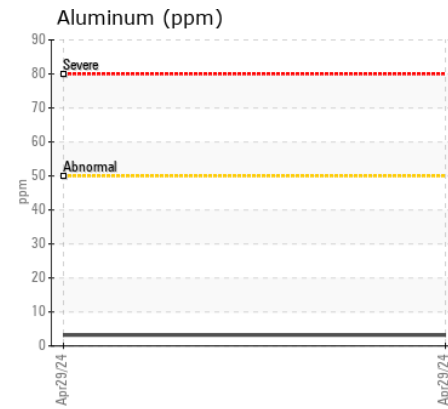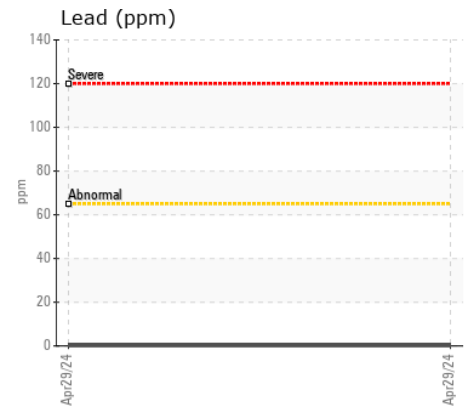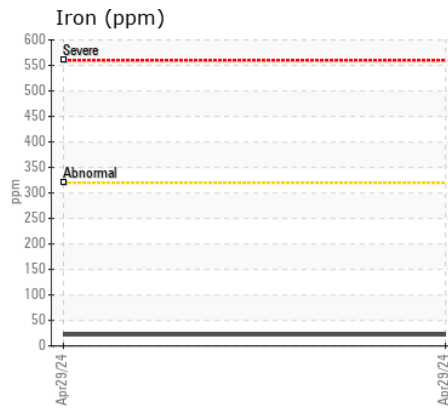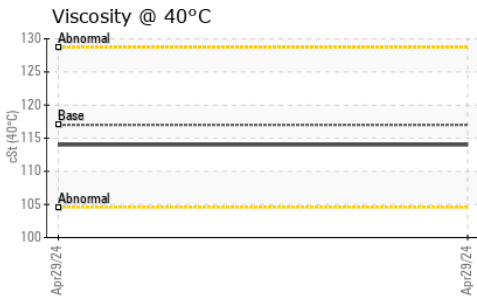

Laboratory : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9
Sample No. : GFL0112493
Lab Number : 02633192
Unique Number : 5774345
Test Package : MOB 1
Received : 03 May 2024
Tested : 03 May 2024
Diagnosed : 03 May 2024 - Wes Davis

GFL Environmental - 554 - Edmonton SW
 8409 -15th Street NW
 Edmonton, AB
 CA T6P 0B8
 Contact: Tim Greig
 tgreig@gflenv.com
 T: (780)231-0521
 F:

To discuss this sample report, contact Customer Service at 1-800-268-2131.
 Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab.
 Validity of results and interpretation are based on the sample and information as supplied.