



# LIEBHERR

## OIL ANALYSIS REPORT

|                 |               |
|-----------------|---------------|
| WEAR            | <b>NORMAL</b> |
| CONTAMINATION   | <b>NORMAL</b> |
| FLUID CONDITION | <b>NORMAL</b> |



Machine Id  
**LIEBHERR L586 068244**  
Component  
**Rear Right Wheel Hub**  
Fluid  
**LIEBHERR GEAR BASIC 90 LS (--- GAL)**

### RECOMMENDATION

Resample at the next service interval to monitor.

| Test           | UOM | Method      | Limit/Abn | Current            | History1    | History2    |
|----------------|-----|-------------|-----------|--------------------|-------------|-------------|
| Sample Number  |     | Client Info |           | <b>LH0288158</b>   | LH0278524   | LH          |
| Sample Date    |     | Client Info |           | <b>25 Apr 2024</b> | 22 Dec 2023 | 15 Sep 2023 |
| Machine Age    | hrs | Client Info |           | <b>9033</b>        | 7142        | 0           |
| Oil Age        | hrs | Client Info |           | <b>0</b>           | 0           | 0           |
| Filter Age     | hrs | Client Info |           | <b>0</b>           | 0           | 0           |
| Oil Changed    |     | Client Info |           | <b>Changed</b>     | Changed     | Changed     |
| Filter Changed |     | Client Info |           | <b>None</b>        | None        | None        |
| Sample Status  |     |             |           | <b>NORMAL</b>      | NORMAL      | NORMAL      |

### WEAR

All component wear rates are normal.

|              |        |               |       |              |       |      |
|--------------|--------|---------------|-------|--------------|-------|------|
| Iron         | ppm    | ASTM D5185(m) | >1625 | <b>17</b>    | 34    | 13   |
| Chromium     | ppm    | ASTM D5185(m) | >8    | <b>0</b>     | <1    | 0    |
| Nickel       | ppm    | ASTM D5185(m) | >4    | <b>&lt;1</b> | <1    | <1   |
| Titanium     | ppm    | ASTM D5185(m) |       | <b>0</b>     | 0     | 0    |
| Silver       | ppm    | ASTM D5185(m) |       | <b>0</b>     | 0     | <1   |
| Aluminum     | ppm    | ASTM D5185(m) | >25   | <b>0</b>     | <1    | 0    |
| Lead         | ppm    | ASTM D5185(m) | >8    | <b>0</b>     | 0     | 0    |
| Copper       | ppm    | ASTM D5185(m) | >150  | <b>4</b>     | 5     | 5    |
| Tin          | ppm    | ASTM D5185(m) | >10   | <b>0</b>     | <1    | 0    |
| Vanadium     | ppm    | ASTM D5185(m) |       | <b>0</b>     | 0     | 0    |
| White Metal  | scalar | Visual*       | NONE  | <b>NONE</b>  | NONE  | NONE |
| Yellow Metal | scalar | Visual*       | NONE  | <b>NONE</b>  | VLITE | NONE |

### CONTAMINATION










There is no indication of any contamination in the oil.

|                  |        |               |       |              |       |       |
|------------------|--------|---------------|-------|--------------|-------|-------|
| Silicon          | ppm    | ASTM D5185(m) | >100  | <b>&lt;1</b> | 2     | 2     |
| Potassium        | ppm    | ASTM D5185(m) | >20   | <b>0</b>     | <1    | 0     |
| Water            |        | WC Method     | >0.2  | <b>NEG</b>   | NEG   | NEG   |
| Silt             | scalar | Visual*       | NONE  | <b>NONE</b>  | NONE  | VLITE |
| Debris           | scalar | Visual*       | NONE  | <b>NONE</b>  | NONE  | NONE  |
| Sand/Dirt        | scalar | Visual*       | NONE  | <b>NONE</b>  | NONE  | NONE  |
| Appearance       | scalar | Visual*       | NORML | <b>NORML</b> | NORML | NORML |
| Odor             | scalar | Visual*       | NORML | <b>NORML</b> | NORML | NORML |
| Emulsified Water | scalar | Visual*       | >0.2  | <b>NEG</b>   | NEG   | NEG   |

### FLUID CONDITION

The condition of the oil is acceptable for the time in service.

|             |     |               |       |              |       |       |
|-------------|-----|---------------|-------|--------------|-------|-------|
| Sodium      | ppm | ASTM D5185(m) |       | <b>&lt;1</b> | 1     | 2     |
| Boron       | ppm | ASTM D5185(m) | 0     | <b>2</b>     | <1    | 1     |
| Barium      | ppm | ASTM D5185(m) | 0     | <b>0</b>     | 0     | <1    |
| Molybdenum  | ppm | ASTM D5185(m) | 0     | <b>0</b>     | 0     | 0     |
| Manganese   | ppm | ASTM D5185(m) | 0     | <b>1</b>     | 2     | 1     |
| Magnesium   | ppm | ASTM D5185(m) | <1    | <b>&lt;1</b> | <1    | 1     |
| Calcium     | ppm | ASTM D5185(m) | <1    | <b>2</b>     | 7     | 15    |
| Phosphorus  | ppm | ASTM D5185(m) | 2143  | <b>2314</b>  | 2341  | 2264  |
| Zinc        | ppm | ASTM D5185(m) | <1    | <b>5</b>     | 8     | 19    |
| Sulfur      | ppm | ASTM D5185(m) | 23468 | <b>25103</b> | 24614 | 26278 |
| Visc @ 40°C | cSt | ASTM D7279(m) | 170   | <b>183</b>   | 192   | 179   |

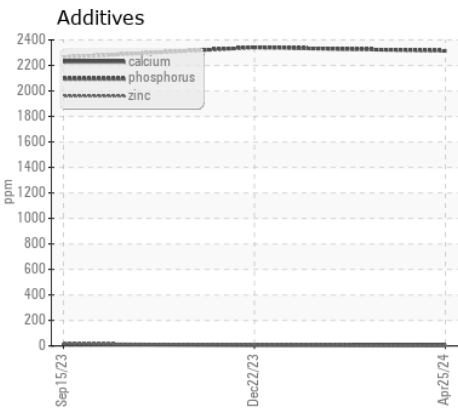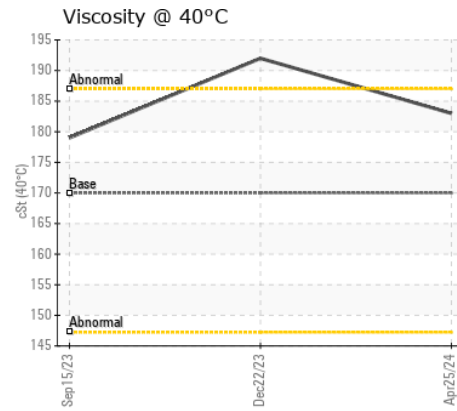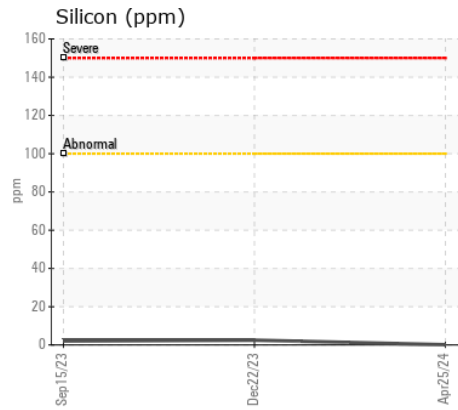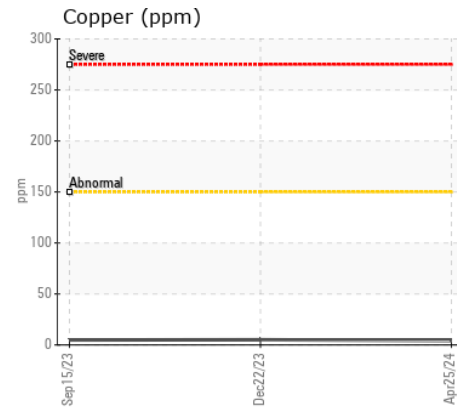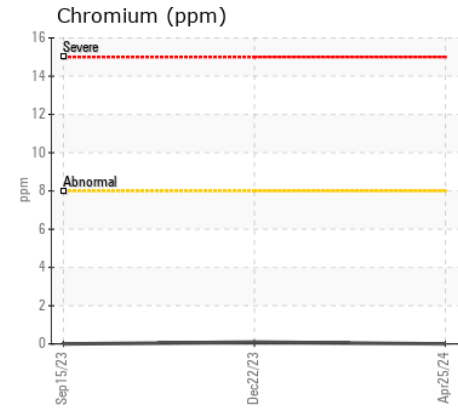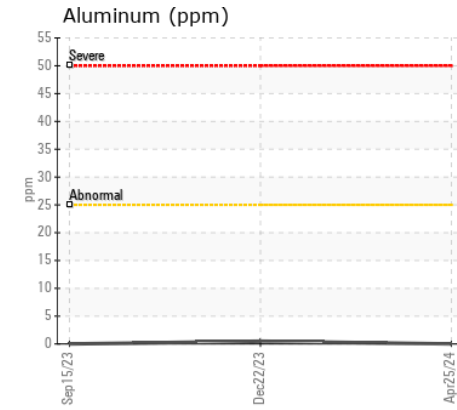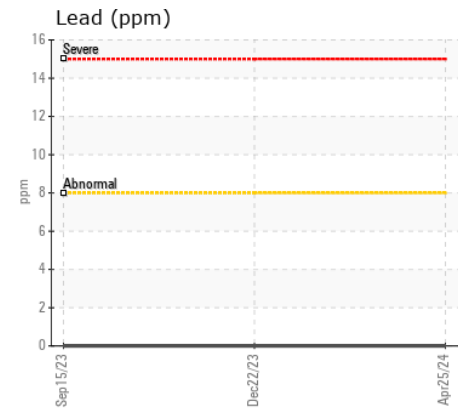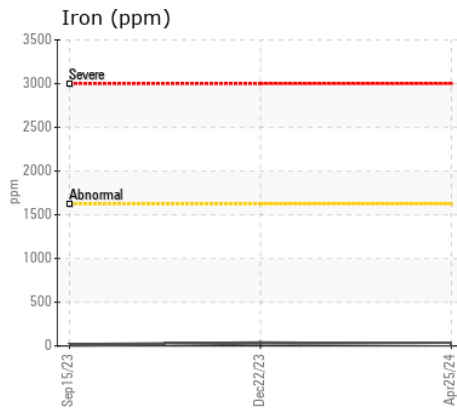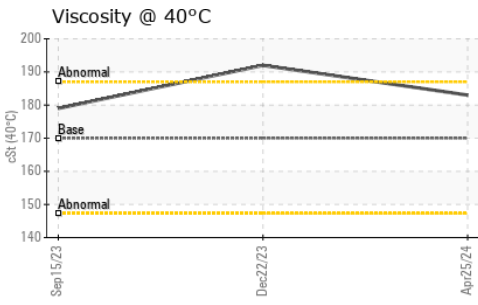

**Laboratory** : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9  
**Sample No.** : LH0288158  
**Lab Number** : 02633289  
**Unique Number** : 5774442  
**Test Package** : MOB 1  
**Received** : 03 May 2024  
**Tested** : 03 May 2024  
**Diagnosed** : 03 May 2024 - Wes Davis

**Gerdau - Mandak Metal Processors Ltd.,**  
 1 Railway St., P.O. Box 334  
 Selkirk, MB  
 CA R1A 2B3  
 Contact: Santiago Giraldo  
 santiago.giraldo@gerdau.com  
 T:  
 F: (204)482-8241

To discuss this sample report, contact Customer Service at 1-800-268-2131.  
 Test denoted (\*) outside scope of accreditation, (m) method modified, (e) tested at external lab.  
 Validity of results and interpretation are based on the sample and information as supplied.