

Machine Id
833082
Component
Transmission (Auto)
Fluid
PETRO CANADA DURADRIVE HD SYNTHETIC ATF (--- GAL)

RECOMMENDATION

Échantillonner de nouveau l'équipement au prochain intervalle de vidange afin d'en surveiller la condition.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		GFL0107526	---	---
Sample Date		Client Info		11 Apr 2024	---	---
Machine Age	kms	Client Info		50484	---	---
Oil Age	kms	Client Info		0	---	---
Filter Age	kms	Client Info		0	---	---
Oil Changed		Client Info		Not Changed	---	---
Filter Changed		Client Info		Changed	---	---
Sample Status				NORMAL	---	---

WEAR

Les taux d'usure de tous les composants sont normaux.

Iron	ppm	ASTM D5185(m)	>160	71	---	---
Chromium	ppm	ASTM D5185(m)	>5	0	---	---
Nickel	ppm	ASTM D5185(m)	>5	<1	---	---
Titanium	ppm	ASTM D5185(m)		0	---	---
Silver	ppm	ASTM D5185(m)	>5	0	---	---
Aluminum	ppm	ASTM D5185(m)	>50	32	---	---
Lead	ppm	ASTM D5185(m)	>50	8	---	---
Copper	ppm	ASTM D5185(m)	>225	9	---	---
Tin	ppm	ASTM D5185(m)	>10	4	---	---
Vanadium	ppm	ASTM D5185(m)		0	---	---
White Metal	scalar	Visual*	NONE	NONE	---	---
Yellow Metal	scalar	Visual*	NONE	NONE	---	---

CONTAMINATION










Il n'y a aucun indice de contamination dans le fluide.

Silicon	ppm	ASTM D5185(m)	>20	4	---	---
Potassium	ppm	ASTM D5185(m)	>20	3	---	---
Water		WC Method	>0.1	NEG	---	---
Silt	scalar	Visual*	NONE	NONE	---	---
Debris	scalar	Visual*	NONE	NONE	---	---
Sand/Dirt	scalar	Visual*	NONE	NONE	---	---
Appearance	scalar	Visual*	NORML	NORML	---	---
Odor	scalar	Visual*	NORML	NORML	---	---
Emulsified Water	scalar	Visual*	>0.1	NEG	---	---

FLUID CONDITION

L'état de le fluide est acceptable pour la durée de service.

Sodium	ppm	ASTM D5185(m)		6	---	---
Boron	ppm	ASTM D5185(m)		73	---	---
Barium	ppm	ASTM D5185(m)		<1	---	---
Molybdenum	ppm	ASTM D5185(m)		0	---	---
Manganese	ppm	ASTM D5185(m)		1	---	---
Magnesium	ppm	ASTM D5185(m)		1	---	---
Calcium	ppm	ASTM D5185(m)		84	---	---
Phosphorus	ppm	ASTM D5185(m)		248	---	---
Zinc	ppm	ASTM D5185(m)		8	---	---
Sulfur	ppm	ASTM D5185(m)		1101	---	---
Visc @ 40°C	cSt	ASTM D7279(m)	36.1	34.9	---	---

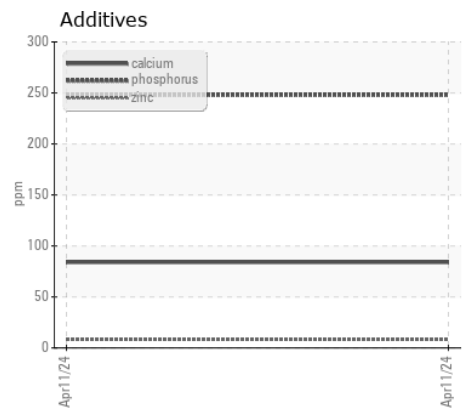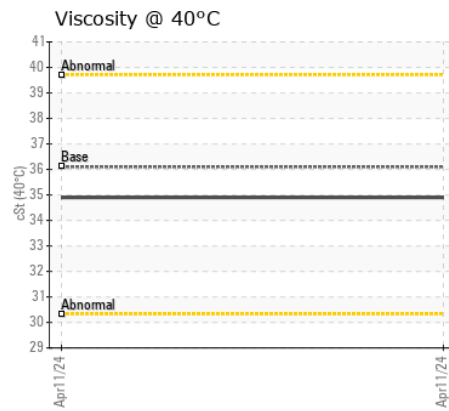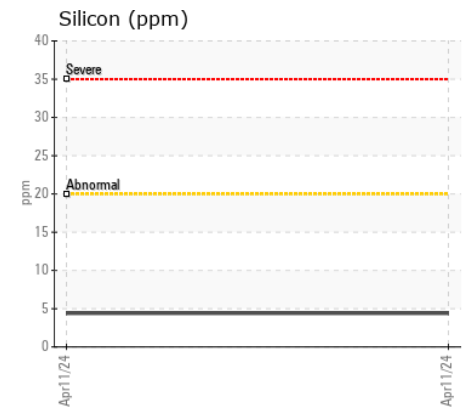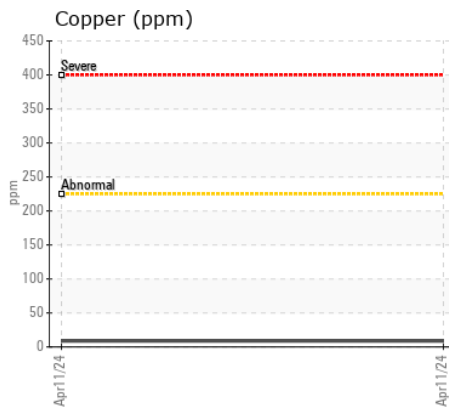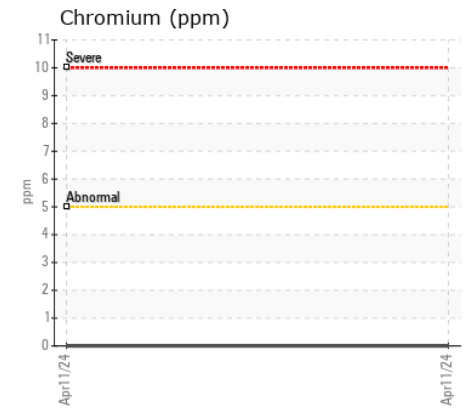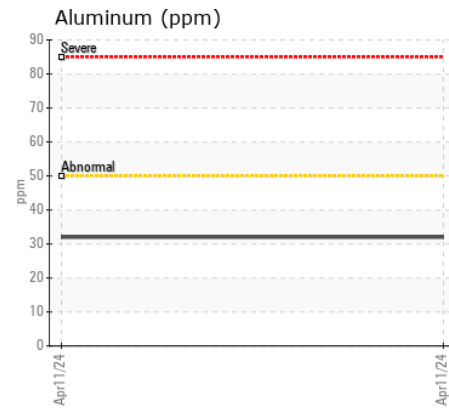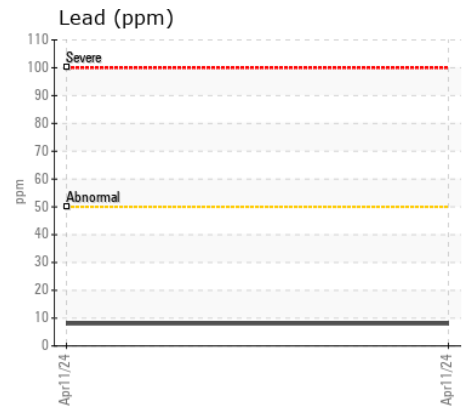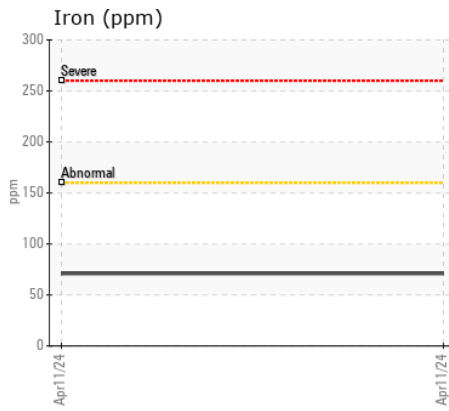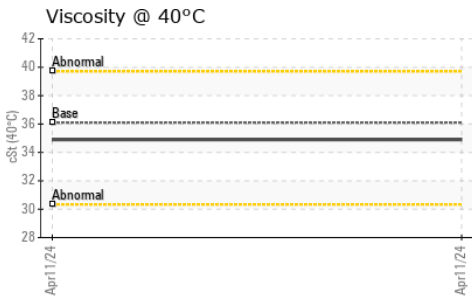

Laboratory : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9 **GFL Environmental - 747 - GMA - Solid Waste**
Sample No. : GFL0107526 **Received** : 06 May 2024 **4 Chemin du Tremblay,**
Lab Number : 02633549 **Tested** : 06 May 2024 **Boucherville, QC**
Unique Number : 5774702 **Diagnosed** : 06 May 2024 - Wes Davis **CA J4B 6Z5**
Test Package : MOB 1 **Contact: Service Manager**
llapierre@matrec.ca

To discuss this sample report, contact Customer Service at 1-800-268-2131.
 Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab.
 Validity of results and interpretation are based on the sample and information as supplied.