



Machine Id  
**711027**  
Component  
**Transmission (Auto)**  
Fluid  
**CASTROL TRANSYND (--- GAL)**

### RECOMMENDATION

Échantillonner de nouveau l'équipement au prochain intervalle de vidange afin d'en surveiller la condition.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		<b>GFL0107629</b>	GFL0096348	GFL0079484
Sample Date		Client Info		<b>29 Apr 2024</b>	25 Oct 2023	05 Jun 2023
Machine Age	hrs	Client Info		<b>5611</b>	4640	47866
Oil Age	hrs	Client Info		<b>0</b>	0	0
Filter Age	hrs	Client Info		<b>0</b>	0	0
Oil Changed		Client Info		<b>N/A</b>	N/A	Not Changd
Filter Changed		Client Info		<b>N/A</b>	N/A	Not Changd
Sample Status				<b>NORMAL</b>	ABNORMAL	NORMAL

### WEAR

Les taux d'usure de tous les composants sont normaux.

Iron	ppm	ASTM D5185(m)	>220	<b>109</b>	127	95
Chromium	ppm	ASTM D5185(m)	>2	<b>0</b>	<1	<1
Nickel	ppm	ASTM D5185(m)	>5	<b>&lt;1</b>	<1	<1
Titanium	ppm	ASTM D5185(m)		<b>0</b>	0	0
Silver	ppm	ASTM D5185(m)	>5	<b>0</b>	<1	0
Aluminum	ppm	ASTM D5185(m)	>75	<b>49</b>	55	44
Lead	ppm	ASTM D5185(m)	>95	<b>87</b>	▲ 105	89
Copper	ppm	ASTM D5185(m)	>60	<b>128</b>	154	121
Tin	ppm	ASTM D5185(m)	>10	<b>9</b>	▲ 10	9
Vanadium	ppm	ASTM D5185(m)		<b>0</b>	0	0
White Metal	scalar	Visual*	NONE	<b>NONE</b>	NONE	NONE
Yellow Metal	scalar	Visual*	NONE	<b>NONE</b>	NONE	NONE

### CONTAMINATION










Il n'y a aucun indice de contamination dans le fluide.

Silicon	ppm	ASTM D5185(m)	>25	<b>6</b>	8	6
Potassium	ppm	ASTM D5185(m)	>20	<b>4</b>	5	5
Water		WC Method	>0.1	<b>NEG</b>	NEG	NEG
Silt	scalar	Visual*	NONE	<b>NONE</b>	NONE	NONE
Debris	scalar	Visual*	NONE	<b>NONE</b>	NONE	NONE
Sand/Dirt	scalar	Visual*	NONE	<b>NONE</b>	NONE	NONE
Appearance	scalar	Visual*	NORML	<b>NORML</b>	NORML	NORML
Odor	scalar	Visual*	NORML	<b>NORML</b>	NORML	NORML
Emulsified Water	scalar	Visual*	>0.1	<b>NEG</b>	NEG	NEG

### FLUID CONDITION

L'état de le fluide est acceptable pour la durée de service.

Sodium	ppm	ASTM D5185(m)		<b>10</b>	13	10
Boron	ppm	ASTM D5185(m)	150	<b>121</b>	144	133
Barium	ppm	ASTM D5185(m)	0	<b>&lt;1</b>	<1	<1
Molybdenum	ppm	ASTM D5185(m)	0	<b>0</b>	0	<1
Manganese	ppm	ASTM D5185(m)		<b>1</b>	2	1
Magnesium	ppm	ASTM D5185(m)	0	<b>1</b>	<1	2
Calcium	ppm	ASTM D5185(m)	40	<b>126</b>	141	124
Phosphorus	ppm	ASTM D5185(m)	320	<b>339</b>	401	386
Zinc	ppm	ASTM D5185(m)	5	<b>6</b>	7	7
Sulfur	ppm	ASTM D5185(m)	1050	<b>1785</b>	2082	1890
Visc @ 40°C	cSt	ASTM D7279(m)	38.9	<b>33.7</b>	33.7	34.0

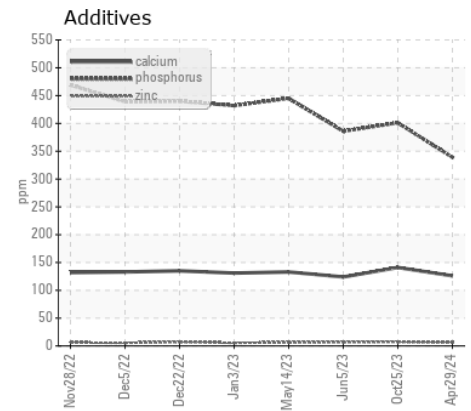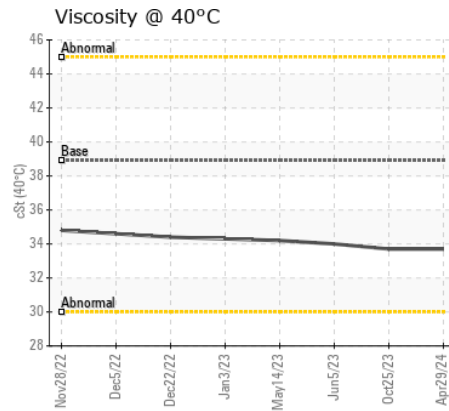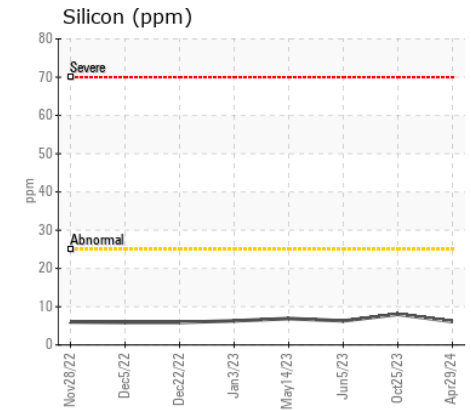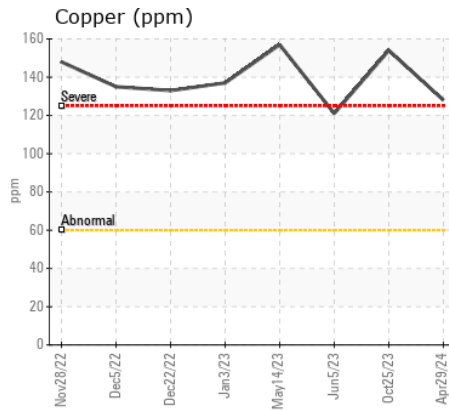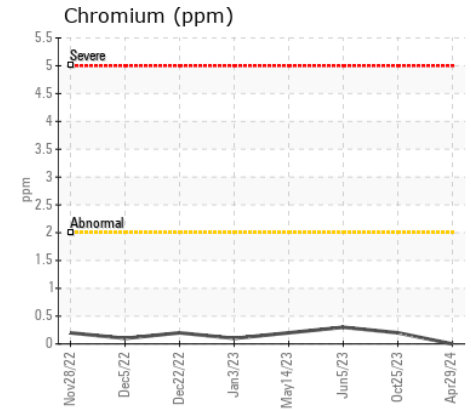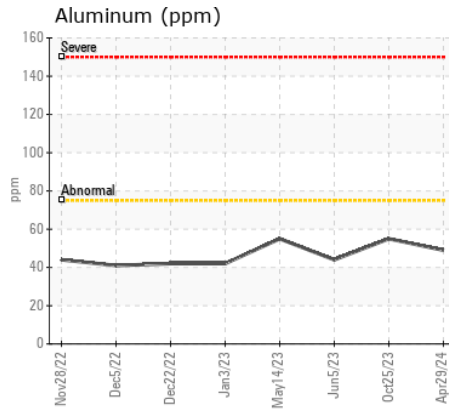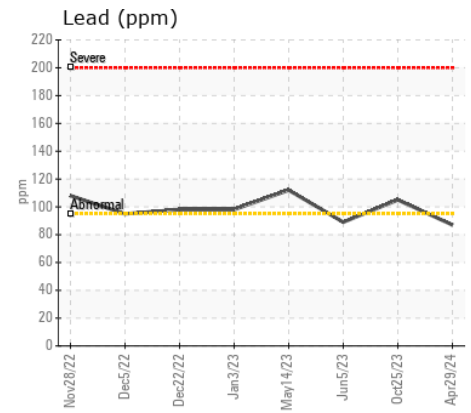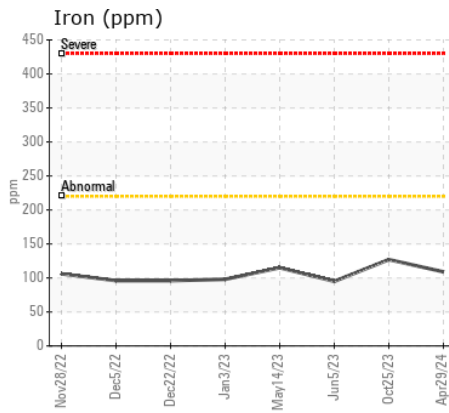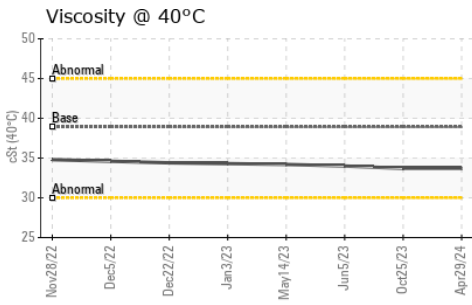

**Laboratory** : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9  
**Sample No.** : GFL0107629  
**Lab Number** : 02633550  
**Unique Number** : 5774703  
**Test Package** : MOB 1  
**Received** : 06 May 2024  
**Tested** : 06 May 2024  
**Diagnosed** : 06 May 2024 - Wes Davis

**GFL Environmental - 747 - GMA - Solid Waste**  
 4 Chemin du Tremblay,  
 Boucherville, QC  
 CA J4B 6Z5  
 Contact: Steve Voyer  
 svoyer@matrec.ca

To discuss this sample report, contact Customer Service at 1-800-268-2131.  
 Test denoted (\*) outside scope of accreditation, (m) method modified, (e) tested at external lab.  
 Validity of results and interpretation are based on the sample and information as supplied.

T:  
F: