



Machine Id
711019
Component
Diesel Engine
Fluid
PETRO CANADA DURON SHP 10W30 (--- GAL)

RECOMMENDATION

Échantillonner de nouveau l'équipement au prochain intervalle de vidange afin d'en surveiller la condition.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		GFL0120762	GFL0096360	GFL0087552
Sample Date		Client Info		26 Apr 2024	02 Nov 2023	27 Jul 2023
Machine Age	kms	Client Info		0	148930	5927
Oil Age	kms	Client Info		600	600	0
Filter Age	kms	Client Info		0	600	0
Oil Changed		Client Info		N/A	Changed	Changed
Filter Changed		Client Info		N/A	Changed	Changed
Sample Status				NORMAL	NORMAL	NORMAL

WEAR

Les taux d'usure de tous les composants sont normaux.

Iron	ppm	ASTM D5185(m)	>120	18	12	11
Chromium	ppm	ASTM D5185(m)	>20	<1	0	<1
Nickel	ppm	ASTM D5185(m)	>5	<1	<1	<1
Titanium	ppm	ASTM D5185(m)	>2	0	0	0
Silver	ppm	ASTM D5185(m)	>2	0	<1	<1
Aluminum	ppm	ASTM D5185(m)	>20	2	1	1
Lead	ppm	ASTM D5185(m)	>40	<1	1	<1
Copper	ppm	ASTM D5185(m)	>330	3	2	3
Tin	ppm	ASTM D5185(m)	>15	<1	<1	<1
Vanadium	ppm	ASTM D5185(m)		0	0	0

CONTAMINATION











Il n'y a aucun indice de contamination dans l'huile.

Silicon	ppm	ASTM D5185(m)	>25	2	3	3
Potassium	ppm	ASTM D5185(m)	>20	2	<1	2
Fuel		WC Method	>3.0	<1.0	<1.0	<1.0
Water		WC Method	>0.2	NEG	NEG	NEG
Glycol		WC Method		NEG	NEG	NEG
Soot %	%	ASTM D7844*	>4	0.3	0.3	0.2
Nitration	Abs/cm	ASTM D7624*	>20	10.3	8.4	7.9
Sulfation	Abs/.1mm	ASTM D7415*	>30	22.2	19.9	19.9
Emulsified Water	scalar	Visual*	>0.2	NEG	NEG	NEG

FLUID CONDITION

L'état de l'huile est acceptable pour la durée de service.

Sodium	ppm	ASTM D5185(m)		2	2	2
Boron	ppm	ASTM D5185(m)	2	4	1	1
Barium	ppm	ASTM D5185(m)	0	0	<1	0
Molybdenum	ppm	ASTM D5185(m)	50	59	60	64
Manganese	ppm	ASTM D5185(m)	0	<1	0	<1
Magnesium	ppm	ASTM D5185(m)	950	938	972	1061
Calcium	ppm	ASTM D5185(m)	1050	1172	1078	1165
Phosphorus	ppm	ASTM D5185(m)	995	898	978	1153
Zinc	ppm	ASTM D5185(m)	1180	1163	1213	1320
Sulfur	ppm	ASTM D5185(m)	2600	2089	2349	2616
Oxidation	Abs/.1mm	ASTM D7414*	>25	18.6	16.2	15.1
Visc @ 100°C	cSt	ASTM D7279(m)	12.00	11.6	11.3	11.5

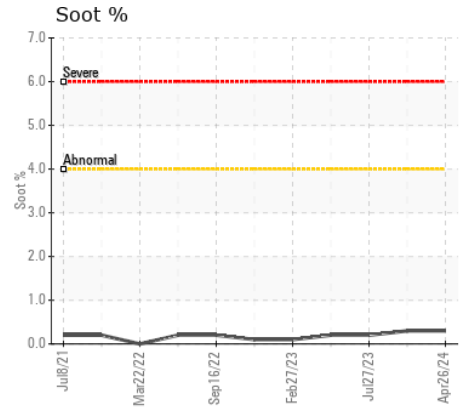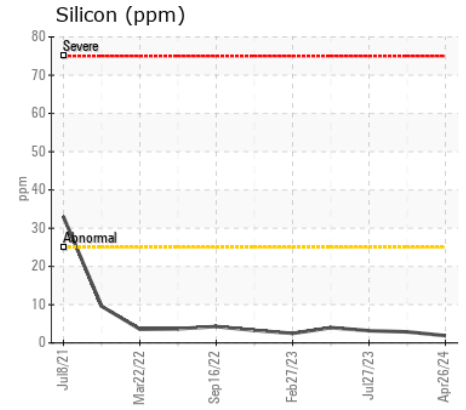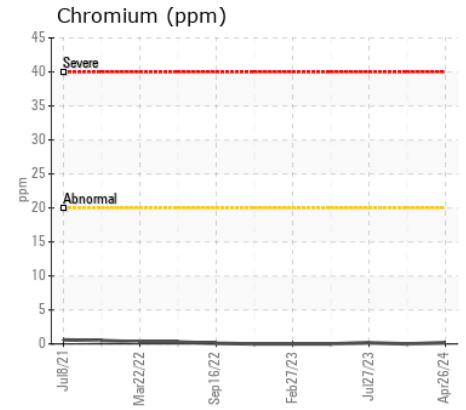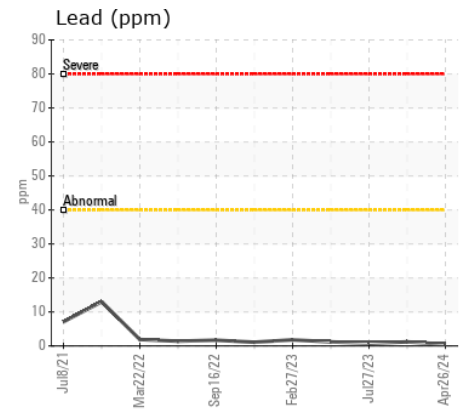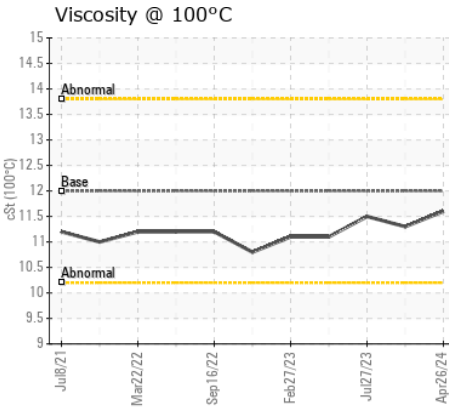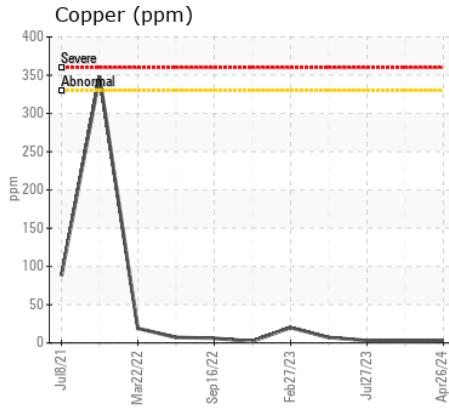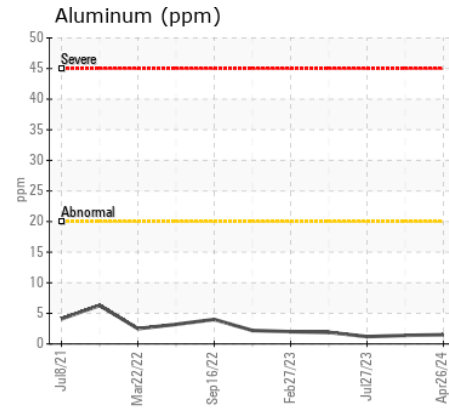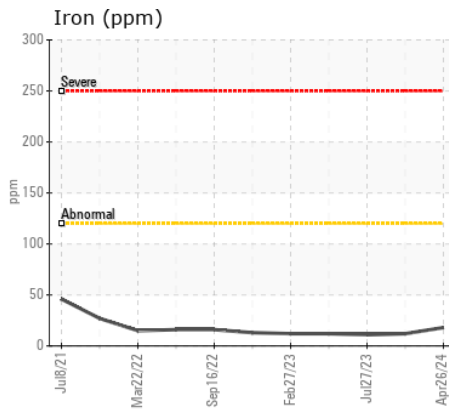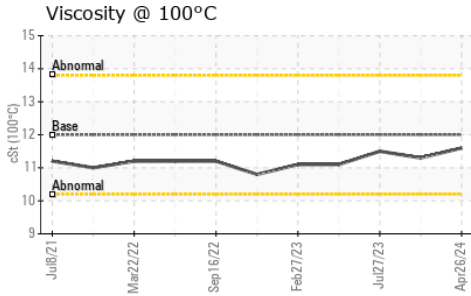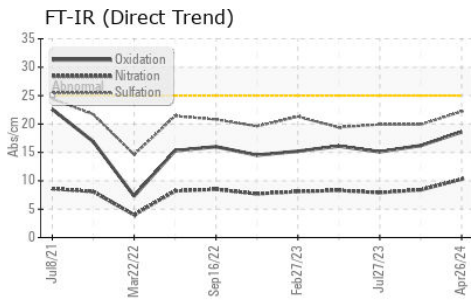

Laboratory : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9
Sample No. : GFL0120762
Lab Number : 02633835
Unique Number : 5774988
Test Package : MOB 1

GFL Environmental - 747 - GMA - Solid Waste
 4 Chemin du Tremblay,
 Boucherville, QC
 CA J4B 6Z5
 Contact: Steve Voyer
 svoyer@matrec.ca

To discuss this sample report, contact Customer Service at 1-800-268-2131.
 Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab.
 Validity of results and interpretation are based on the sample and information as supplied.

T:
F: