



WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Machine Id
8310
 Component
Transmission (Auto)
 Fluid
DEXRON III (--- GAL)

RECOMMENDATION

Échantillonner de nouveau l'équipement au prochain intervalle de vidange afin d'en surveiller la condition. Le fluide n'était pas spécifié, toutefois, une comparaison avec d'autres fluides indique que ce fluide est du (GENERIC) DEXRON III. Veuillez confirmer.

WEAR

Les taux d'usure de tous les composants sont normaux.










CONTAMINATION

Il n'y a aucun indice de contamination dans le fluide.

FLUID CONDITION

L'état de le fluide est acceptable pour la durée de service.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		GFL0120758	GFL0067283	GFL0021307
Sample Date		Client Info		01 May 2024	14 Dec 2022	07 Sep 2021
Machine Age	hrs	Client Info		0	381146	347090
Oil Age	hrs	Client Info		1200	0	0
Filter Age	hrs	Client Info		0	0	0
Oil Changed		Client Info		N/A	N/A	N/A
Filter Changed		Client Info		N/A	N/A	N/A
Sample Status				NORMAL	NORMAL	NORMAL
Iron	ppm	ASTM D5185(m)	>230	57	81	157
Chromium	ppm	ASTM D5185(m)	>2	0	0	<1
Nickel	ppm	ASTM D5185(m)	>5	<1	0	<1
Titanium	ppm	ASTM D5185(m)	>2	0	<1	0
Silver	ppm	ASTM D5185(m)	>5	0	0	<1
Aluminum	ppm	ASTM D5185(m)	>65	10	15	37
Lead	ppm	ASTM D5185(m)	>55	4	5	24
Copper	ppm	ASTM D5185(m)	>85	6	13	67
Tin	ppm	ASTM D5185(m)	>5	0	<1	2
Vanadium	ppm	ASTM D5185(m)		0	0	0
White Metal	scalar	Visual*	NONE	NONE	NONE	NONE
Yellow Metal	scalar	Visual*	NONE	NONE	NONE	NONE
Silicon	ppm	ASTM D5185(m)	>20	11	14	17
Potassium	ppm	ASTM D5185(m)	>20	<1	1	2
Water		WC Method	>0.1	NEG	NEG	NEG
Silt	scalar	Visual*	NONE	NONE	NONE	NONE
Debris	scalar	Visual*	NONE	NONE	NONE	NONE
Sand/Dirt	scalar	Visual*	NONE	NONE	NONE	NONE
Appearance	scalar	Visual*	NORML	NORML	NORML	NORML
Odor	scalar	Visual*	NORML	NORML	NORML	NORML
Emulsified Water	scalar	Visual*	>0.1	NEG	NEG	NEG
Sodium	ppm	ASTM D5185(m)		9	14	48
Boron	ppm	ASTM D5185(m)		65	73	134
Barium	ppm	ASTM D5185(m)		0	0	<1
Molybdenum	ppm	ASTM D5185(m)		0	0	<1
Manganese	ppm	ASTM D5185(m)		<1	<1	1
Magnesium	ppm	ASTM D5185(m)		3	1	1
Calcium	ppm	ASTM D5185(m)		131	138	118
Phosphorus	ppm	ASTM D5185(m)		213	239	394
Zinc	ppm	ASTM D5185(m)		12	15	14
Sulfur	ppm	ASTM D5185(m)		1346	1504	1502
Visc @ 40°C	cSt	ASTM D7279(m)	26.0	33.8	33.6	35.3

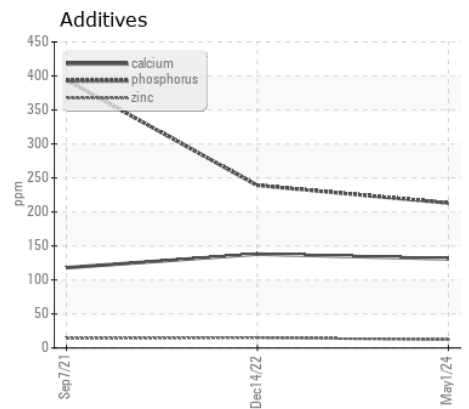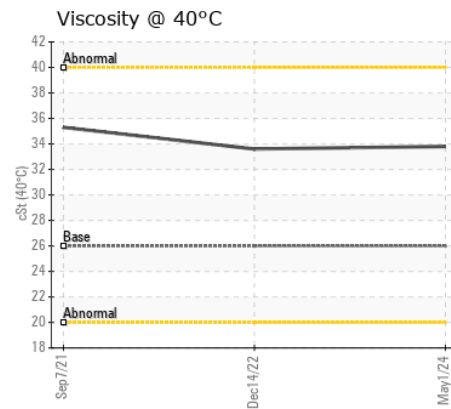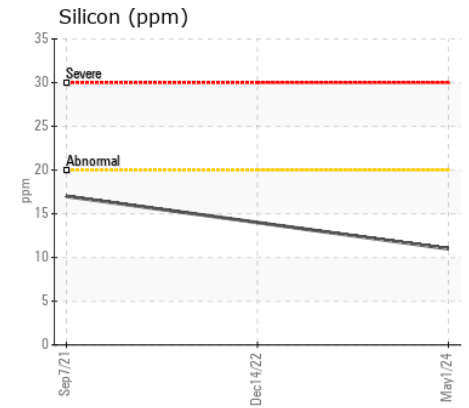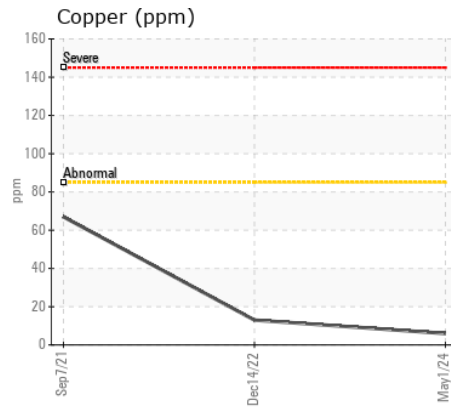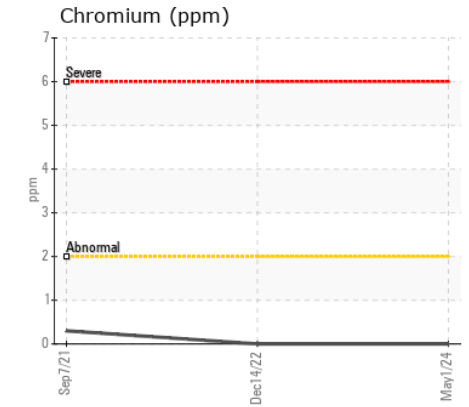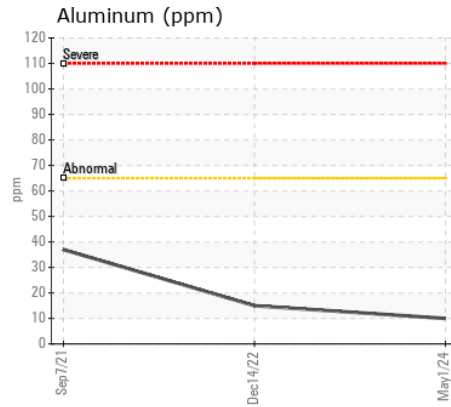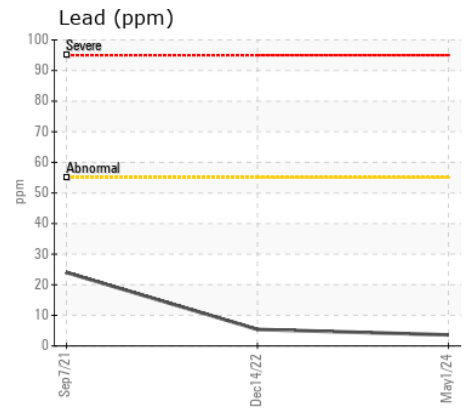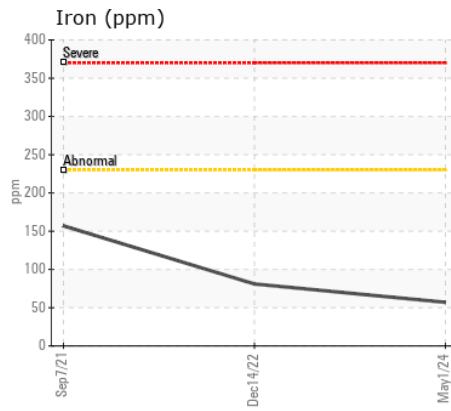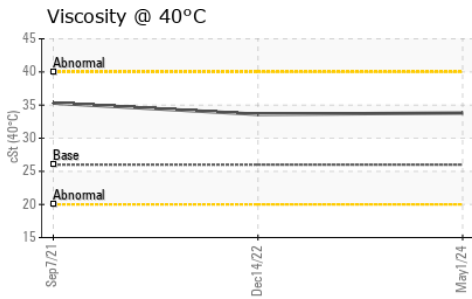

Laboratory : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9 **GFL Environmental - 747 - GMA - Solid Waste**
Sample No. : GFL0120758 **Received** : 07 May 2024 **4 Chemin du Tremblay,**
Lab Number : 02633907 **Tested** : 07 May 2024 **Boucherville, QC**
Unique Number : 5775060 **Diagnosed** : 07 May 2024 - Wes Davis **CA J4B 6Z5**
Test Package : MOB 1 **Contact:** Steve Voyer
svoyer@matrec.ca

To discuss this sample report, contact Customer Service at 1-800-268-2131.
 Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab.
 Validity of results and interpretation are based on the sample and information as supplied.