



WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL



Machine Id
8331
Component
Transmission (Auto)
Fluid
PETRO CANADA DuraDrive HD Synthetic 668 (--- GAL)

RECOMMENDATION

Échantillonner de nouveau l'équipement au prochain intervalle de vidange afin d'en surveiller la condition.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		GFL0120766	GFL0096351	GFL0079440
Sample Date		Client Info		19 Apr 2024	01 Nov 2023	15 May 2023
Machine Age	kms	Client Info		329670	299776	294132
Oil Age	kms	Client Info		1200	600	0
Filter Age	kms	Client Info		0	600	0
Oil Changed		Client Info		N/A	N/A	Not Changed
Filter Changed		Client Info		N/A	N/A	Changed
Sample Status				NORMAL	NORMAL	NORMAL

WEAR

Les taux d'usure de tous les composants sont normaux.

Iron	ppm	ASTM D5185(m)	>160	27	34	30
Chromium	ppm	ASTM D5185(m)	>5	0	0	0
Nickel	ppm	ASTM D5185(m)	>5	<1	<1	<1
Titanium	ppm	ASTM D5185(m)		<1	0	<1
Silver	ppm	ASTM D5185(m)	>5	0	<1	0
Aluminum	ppm	ASTM D5185(m)	>50	14	18	17
Lead	ppm	ASTM D5185(m)	>50	3	5	5
Copper	ppm	ASTM D5185(m)	>225	3	3	4
Tin	ppm	ASTM D5185(m)	>10	1	2	1
Vanadium	ppm	ASTM D5185(m)		0	0	0
White Metal	scalar	Visual*	NONE	VLITE	NONE	NONE
Yellow Metal	scalar	Visual*	NONE	NONE	NONE	NONE

CONTAMINATION










Il n'y a aucun indice de contamination dans le fluide.

Silicon	ppm	ASTM D5185(m)	>20	5	11	8
Potassium	ppm	ASTM D5185(m)	>20	1	1	<1
Water		WC Method	>0.1	NEG	NEG	NEG
Silt	scalar	Visual*	NONE	NONE	VLITE	NONE
Debris	scalar	Visual*	NONE	VLITE	NONE	NONE
Sand/Dirt	scalar	Visual*	NONE	NONE	NONE	NONE
Appearance	scalar	Visual*	NORML	NORML	NORML	NORML
Odor	scalar	Visual*	NORML	NORML	NORML	NORML
Emulsified Water	scalar	Visual*	>0.1	NEG	NEG	NEG

FLUID CONDITION

L'état de le fluide est acceptable pour la durée de service.

Sodium	ppm	ASTM D5185(m)		26	34	35
Boron	ppm	ASTM D5185(m)	78	59	58	58
Barium	ppm	ASTM D5185(m)		0	<1	0
Molybdenum	ppm	ASTM D5185(m)	0	0	0	<1
Manganese	ppm	ASTM D5185(m)		0	0	<1
Magnesium	ppm	ASTM D5185(m)	0	2	4	3
Calcium	ppm	ASTM D5185(m)	113	126	134	130
Phosphorus	ppm	ASTM D5185(m)	222	205	210	243
Zinc	ppm	ASTM D5185(m)		10	15	12
Sulfur	ppm	ASTM D5185(m)	1326	1252	1273	1389
Visc @ 40°C	cSt	ASTM D7279(m)	34.8	34.0	34.2	34.4

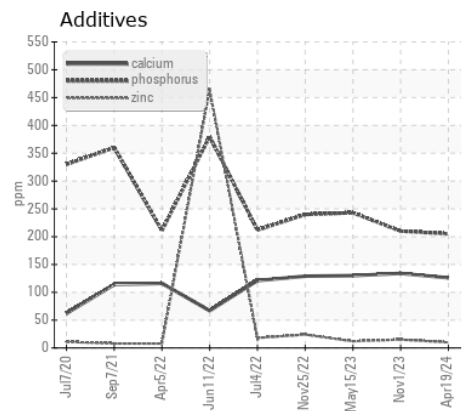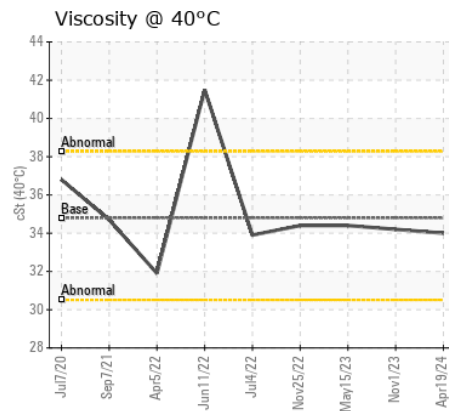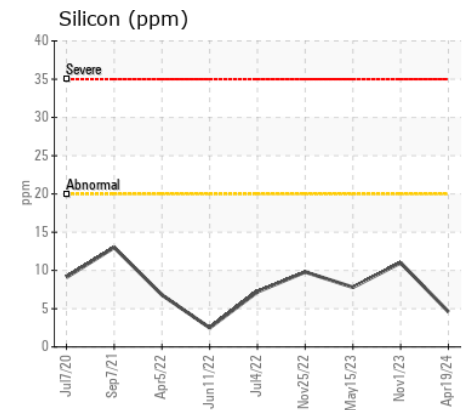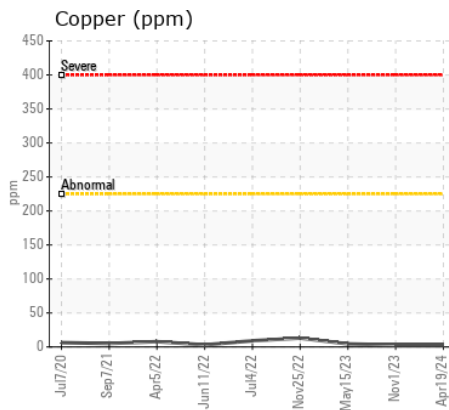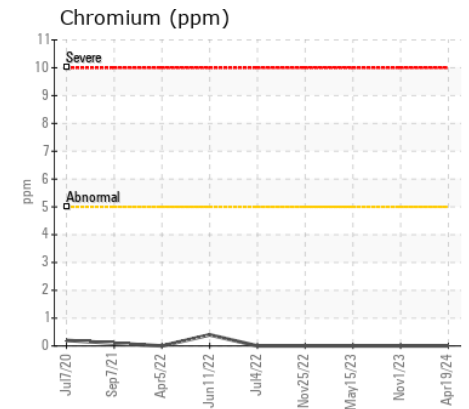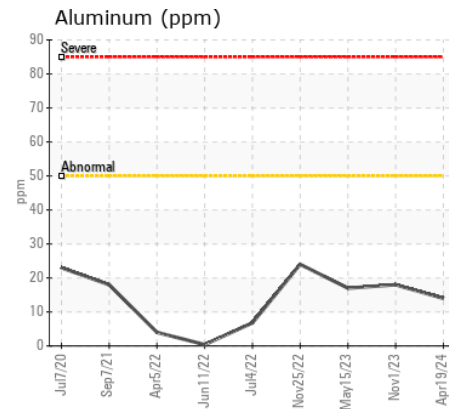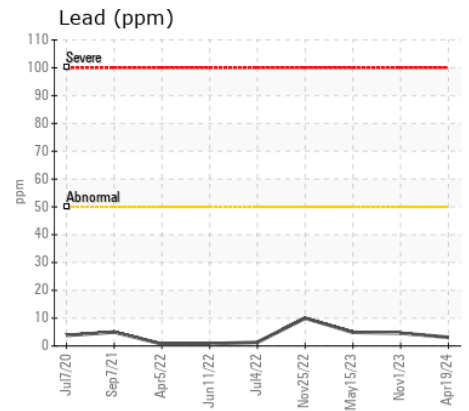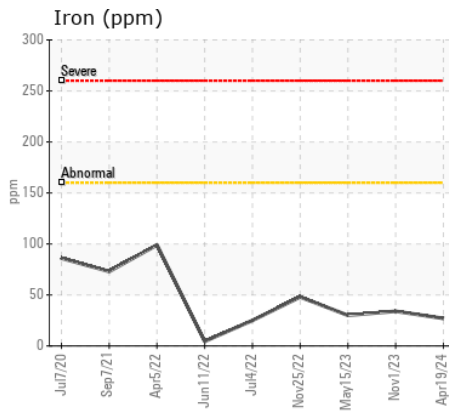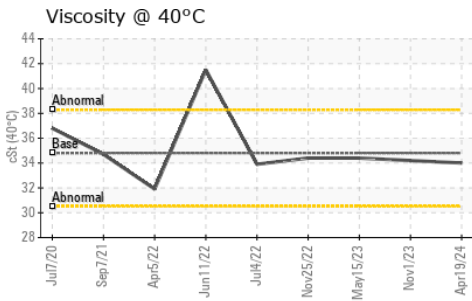

Laboratory : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9
Sample No. : GFL0120766
Lab Number : 02633912
Unique Number : 5775065
Test Package : MOB 1
Received : 07 May 2024
Tested : 07 May 2024
Diagnosed : 07 May 2024 - Wes Davis

GFL Environmental - 747 - GMA - Solid Waste
 4 Chemin du Tremblay,
 Boucherville, QC
 CA J4B 6Z5
 Contact: Steve Voyer
 svoyer@matrec.ca

To discuss this sample report, contact Customer Service at 1-800-268-2131.
 Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab.
 Validity of results and interpretation are based on the sample and information as supplied.