



LIEBHERR

OIL ANALYSIS REPORT

WEAR	ABNORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL



Machine Id
LIEBHERR L586 070058-1761
Component
Rear Differential
Fluid
NOT GIVEN (--- GAL)

RECOMMENDATION

We recommend that you drain the oil from the component if this has not already been done. We recommend an early resample to monitor this condition.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		LH	LH0260171	---
Sample Date		Client Info		03 May 2024	19 May 2023	---
Machine Age	hrs	Client Info		3352	1026	---
Oil Age	hrs	Client Info		0	0	---
Filter Age	hrs	Client Info		0	0	---
Oil Changed		Client Info		Not Changed	Changed	---
Filter Changed		Client Info		Not Changed	N/A	---
Sample Status				ABNORMAL	NORMAL	---

WEAR

Tin ppm levels are abnormal. Bearing and/or bushing wear is indicated.

Iron	ppm	ASTM D5185(m)	>1500	248	149	---
Chromium	ppm	ASTM D5185(m)	>10	2	2	---
Nickel	ppm	ASTM D5185(m)	>4	<1	<1	---
Titanium	ppm	ASTM D5185(m)	>5	0	<1	---
Silver	ppm	ASTM D5185(m)		0	0	---
Aluminum	ppm	ASTM D5185(m)	>20	<1	1	---
Lead	ppm	ASTM D5185(m)	>5	3	5	---
Copper	ppm	ASTM D5185(m)	>200	172	149	---
Tin	ppm	ASTM D5185(m)	>10	▲ 11	7	---
Vanadium	ppm	ASTM D5185(m)		0	<1	---
White Metal	scalar	Visual*	NONE	NONE	NONE	---
Yellow Metal	scalar	Visual*	NONE	NONE	NONE	---

CONTAMINATION

There is no indication of any contamination in the oil.











Silicon	ppm	ASTM D5185(m)	>60	10	22	---
Potassium	ppm	ASTM D5185(m)	>20	<1	<1	---
Water		WC Method	>.2	NEG	NEG	---
Silt	scalar	Visual*	NONE	VLITE	NONE	---
Debris	scalar	Visual*	NONE	NONE	NONE	---
Sand/Dirt	scalar	Visual*	NONE	NONE	NONE	---
Appearance	scalar	Visual*	NORML	NORML	NORML	---
Odor	scalar	Visual*	NORML	NORML	NORML	---
Emulsified Water	scalar	Visual*	>.2	NEG	NEG	---

FLUID CONDITION

The oil is no longer serviceable as a result of the abnormal and/or severe wear.

Sodium	ppm	ASTM D5185(m)		3	4	---
Boron	ppm	ASTM D5185(m)		252	<1	---
Barium	ppm	ASTM D5185(m)		<1	0	---
Molybdenum	ppm	ASTM D5185(m)		0	<1	---
Manganese	ppm	ASTM D5185(m)		18	36	---
Magnesium	ppm	ASTM D5185(m)		2	<1	---
Calcium	ppm	ASTM D5185(m)		13	9	---
Phosphorus	ppm	ASTM D5185(m)		2182	2490	---
Zinc	ppm	ASTM D5185(m)		52	34	---
Sulfur	ppm	ASTM D5185(m)		19147	28448	---
Visc @ 40°C	cSt	ASTM D7279(m)		92.8	193	---

▲ Non-ferrous Metals

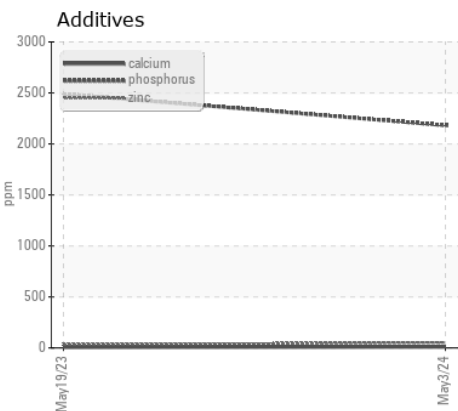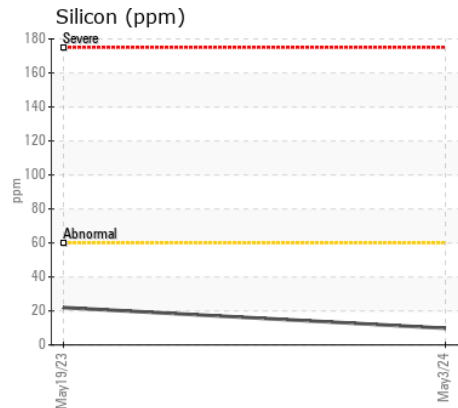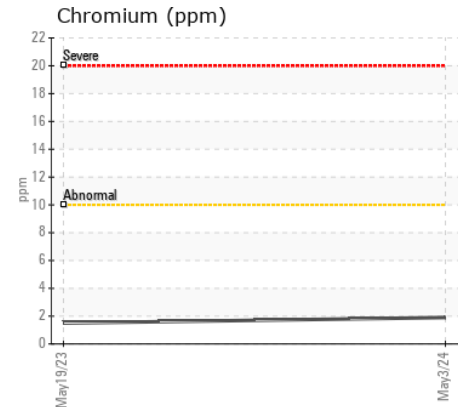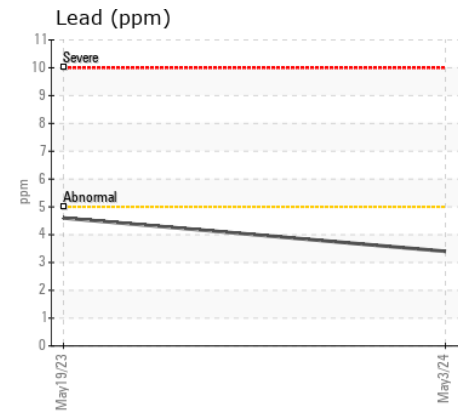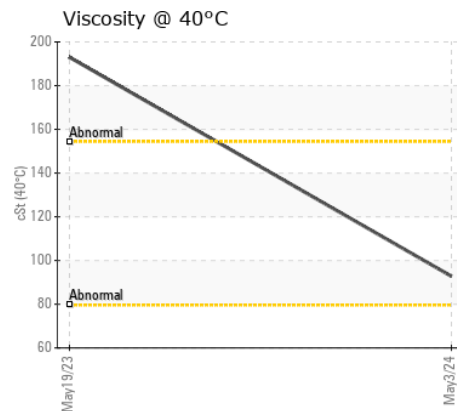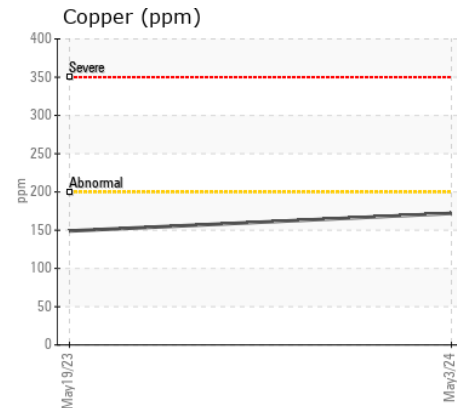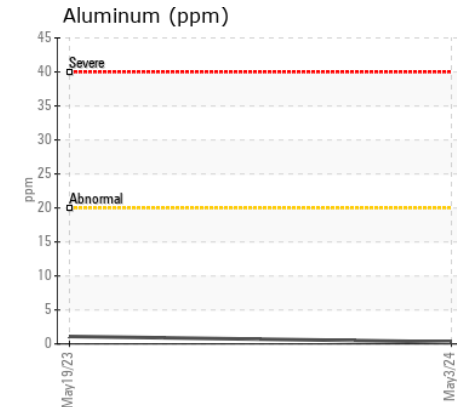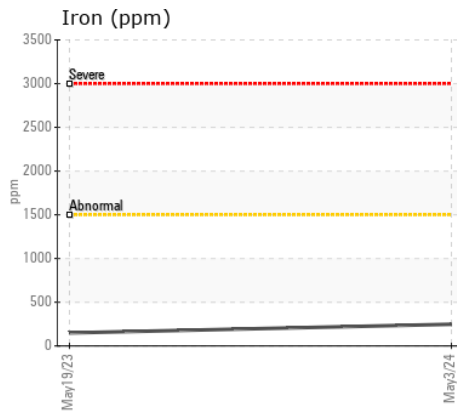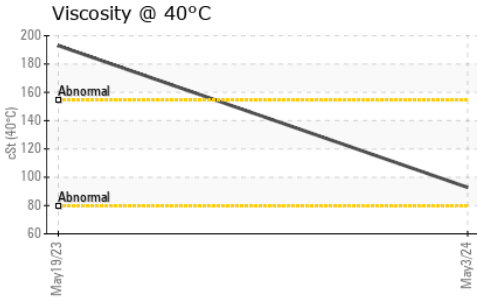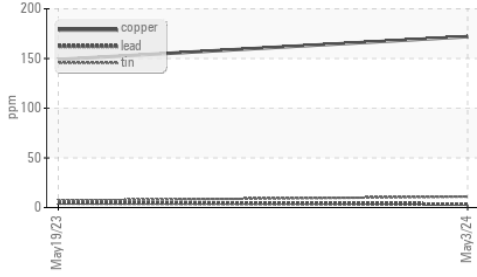

Laboratory : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9
Sample No. : LH **Received** : 07 May 2024
Lab Number : 02633917 **Tested** : 07 May 2024
Unique Number : 5775070 **Diagnosed** : 07 May 2024 - Kevin Marson
Test Package : MOB 1

Gravier Collet Gravel
 SW31-6-8W
 Notre Dame de Lourdes, MB
 CA R0G 1M0
 Contact: Service Manager

To discuss this sample report, contact Customer Service at 1-800-268-2131.
 Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab.
 Validity of results and interpretation are based on the sample and information as supplied.

T:
F: