



# LIEBHERR

## OIL ANALYSIS REPORT

WEAR	<b>NORMAL</b>
CONTAMINATION	<b>NORMAL</b>
FLUID CONDITION	<b>NORMAL</b>



Machine Id  
**LIEBHERR LH30M 112545-1253**  
Component  
**Splitter Box**  
Fluid  
**GEAR OIL SAE 80W90 (--- GAL)**

### RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		<b>LH0289582</b>	LH0274830	LH
Sample Date		Client Info		<b>06 May 2024</b>	04 Mar 2024	07 Dec 2023
Machine Age	hrs	Client Info		<b>15168</b>	0	13530
Oil Age	hrs	Client Info		<b>0</b>	0	0
Filter Age	hrs	Client Info		<b>0</b>	0	0
Oil Changed		Client Info		<b>Changed</b>	N/A	Changed
Filter Changed		Client Info		<b>N/A</b>	Not Changed	None
Sample Status				<b>NORMAL</b>	NORMAL	NORMAL

### WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185(m)	>100	<b>9</b>	7	10
Chromium	ppm	ASTM D5185(m)	>5	<b>0</b>	0	0
Nickel	ppm	ASTM D5185(m)	>5	<b>0</b>	<1	<1
Titanium	ppm	ASTM D5185(m)		<b>0</b>	0	0
Silver	ppm	ASTM D5185(m)		<b>0</b>	0	<1
Aluminum	ppm	ASTM D5185(m)	>20	<b>0</b>	<1	<1
Lead	ppm	ASTM D5185(m)	>30	<b>0</b>	0	<1
Copper	ppm	ASTM D5185(m)	>20	<b>1</b>	<1	2
Tin	ppm	ASTM D5185(m)	>10	<b>0</b>	0	0
Vanadium	ppm	ASTM D5185(m)		<b>0</b>	0	0
White Metal	scalar	Visual*	NONE	<b>NONE</b>	NONE	NONE
Yellow Metal	scalar	Visual*	NONE	<b>NONE</b>	NONE	NONE

### CONTAMINATION










There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185(m)	>30	<b>0</b>	<1	<1
Potassium	ppm	ASTM D5185(m)	>20	<b>&lt;1</b>	<1	1
Water		WC Method	>0.1	<b>NEG</b>	NEG	NEG
Silt	scalar	Visual*	NONE	<b>NONE</b>	NONE	NONE
Debris	scalar	Visual*	NONE	<b>NONE</b>	NONE	VLITE
Sand/Dirt	scalar	Visual*	NONE	<b>NONE</b>	NONE	NONE
Appearance	scalar	Visual*	NORML	<b>NORML</b>	NORML	NORML
Odor	scalar	Visual*	NORML	<b>NORML</b>	NORML	NORML
Emulsified Water	scalar	Visual*	>0.1	<b>NEG</b>	NEG	NEG

### FLUID CONDITION

The condition of the oil is acceptable for the time in service.

Sodium	ppm	ASTM D5185(m)	>170	<b>1</b>	<1	3
Boron	ppm	ASTM D5185(m)	400	<b>261</b>	260	283
Barium	ppm	ASTM D5185(m)	200	<b>0</b>	0	<1
Molybdenum	ppm	ASTM D5185(m)	12	<b>0</b>	0	0
Manganese	ppm	ASTM D5185(m)		<b>0</b>	0	0
Magnesium	ppm	ASTM D5185(m)	12	<b>4</b>	2	1
Calcium	ppm	ASTM D5185(m)	150	<b>64</b>	55	45
Phosphorus	ppm	ASTM D5185(m)	1650	<b>1110</b>	1178	1148
Zinc	ppm	ASTM D5185(m)	125	<b>147</b>	131	104
Sulfur	ppm	ASTM D5185(m)	22500	<b>16936</b>	18231	18779
Visc @ 40°C	cSt	ASTM D7279(m)	143	<b>80.5</b>	84.1	86.0

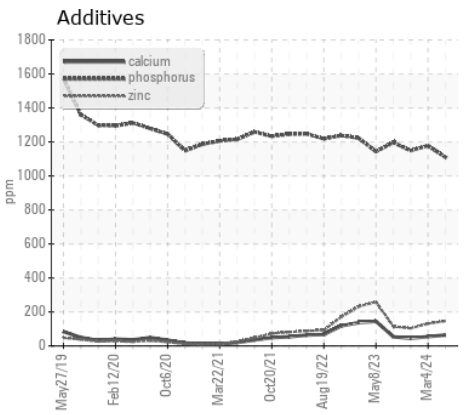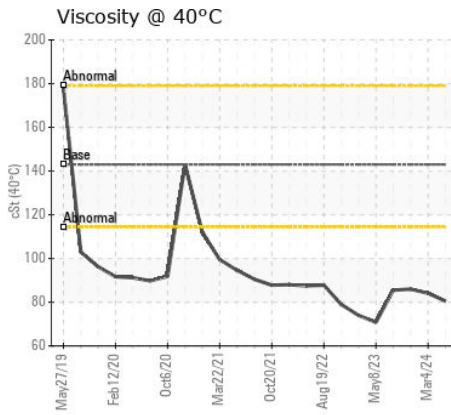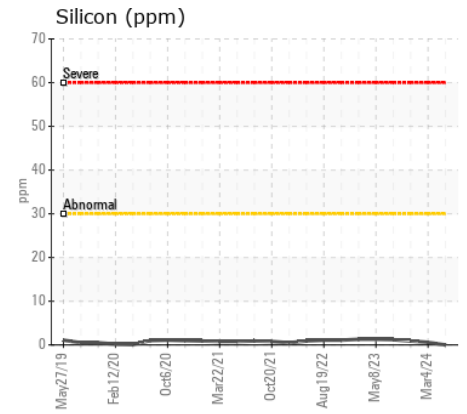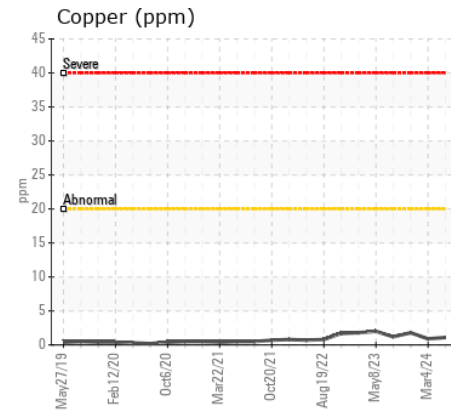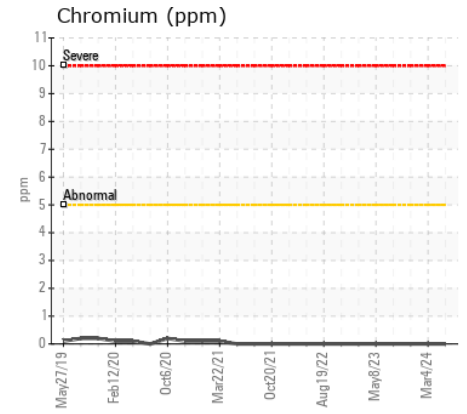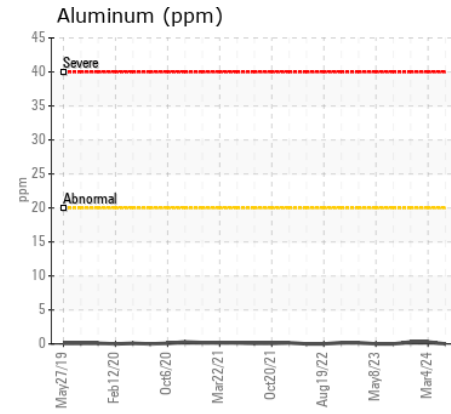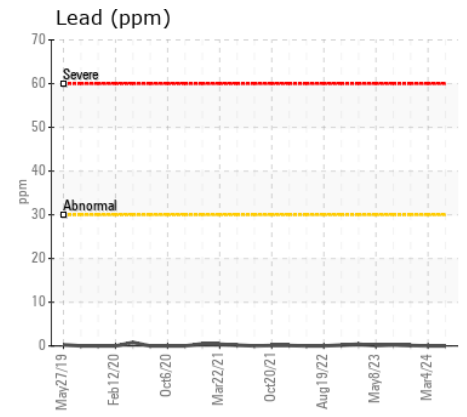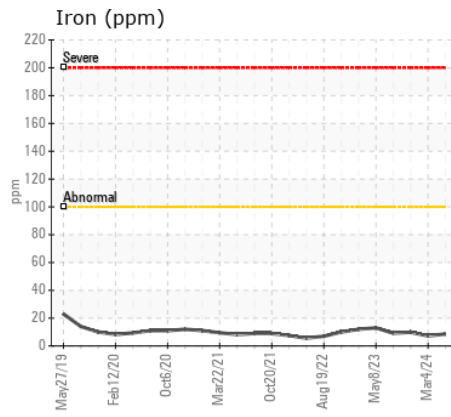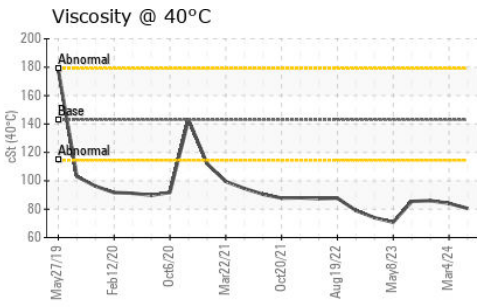

**Laboratory** : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9  
**Sample No.** : LH0289582 **Received** : 07 May 2024  
**Lab Number** : 02633948 **Tested** : 07 May 2024  
**Unique Number** : 5775101 **Diagnosed** : 07 May 2024 - Wes Davis  
**Test Package** : MOB 1

**GREEN METALS CANADA**  
 224 BEARDS LANE  
 WOODSTOCK, ON  
 CA N4S 7W3  
 Contact: Jamie Depotie  
 jdepotie@gmcan.ca  
 T: (519)539-1313  
 F: (519)539-5130

To discuss this sample report, contact Customer Service at 1-800-268-2131.  
 Test denoted (\*) outside scope of accreditation, (m) method modified, (e) tested at external lab.  
 Validity of results and interpretation are based on the sample and information as supplied.