



WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Machine Id
8431
 Component
Diesel Engine
 Fluid
PETRO CANADA DURON SHP 10W30 (--- GAL)

RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		GFL0118963	GFL0101710	GFL0085956
Sample Date		Client Info		07 May 2024	21 Nov 2023	25 Jun 2023
Machine Age	hrs	Client Info		0	19231	19046
Oil Age	hrs	Client Info		0	0	0
Filter Age	hrs	Client Info		0	0	0
Oil Changed		Client Info		N/A	N/A	N/A
Filter Changed		Client Info		N/A	N/A	N/A
Sample Status				NORMAL	NORMAL	NORMAL

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185(m)	>110	22	16	21
Chromium	ppm	ASTM D5185(m)	>4	<1	<1	<1
Nickel	ppm	ASTM D5185(m)	>2	0	0	<1
Titanium	ppm	ASTM D5185(m)		0	0	0
Silver	ppm	ASTM D5185(m)	>2	0	<1	0
Aluminum	ppm	ASTM D5185(m)	>25	2	1	1
Lead	ppm	ASTM D5185(m)	>45	<1	1	2
Copper	ppm	ASTM D5185(m)	>85	1	1	2
Tin	ppm	ASTM D5185(m)	>4	0	0	0
Vanadium	ppm	ASTM D5185(m)		0	0	0

CONTAMINATION











There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185(m)	>30	5	3	4
Potassium	ppm	ASTM D5185(m)	>20	4	2	4
Fuel		WC Method	>5	<1.0	<1.0	<1.0
Water		WC Method	>0.2	NEG	NEG	NEG
Glycol		WC Method		NEG	NEG	NEG
Soot %	%	ASTM D7844*	>3	0.4	0.5	0.3
Nitration	Abs/cm	ASTM D7624*	>20	7.9	6.6	6.8
Sulfation	Abs/.1mm	ASTM D7415*	>30	20.0	19.2	19.0
Emulsified Water	scalar	Visual*	>0.2	NEG	NEG	NEG

FLUID CONDITION

The condition of the oil is acceptable for the time in service.

Sodium	ppm	ASTM D5185(m)		30	22	25
Boron	ppm	ASTM D5185(m)	2	2	1	4
Barium	ppm	ASTM D5185(m)	0	0	<1	0
Molybdenum	ppm	ASTM D5185(m)	50	62	58	58
Manganese	ppm	ASTM D5185(m)	0	<1	0	<1
Magnesium	ppm	ASTM D5185(m)	950	997	930	959
Calcium	ppm	ASTM D5185(m)	1050	1096	987	1031
Phosphorus	ppm	ASTM D5185(m)	995	1027	959	1058
Zinc	ppm	ASTM D5185(m)	1180	1198	1149	1163
Sulfur	ppm	ASTM D5185(m)	2600	2596	2504	2580
Oxidation	Abs/.1mm	ASTM D7414*	>25	15.9	14.6	14.9
Visc @ 100°C	cSt	ASTM D7279(m)	12.00	11.2	11.2	11.3

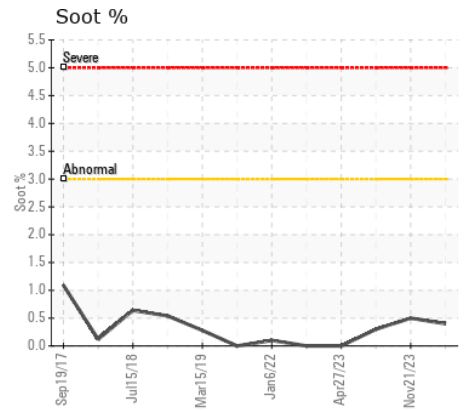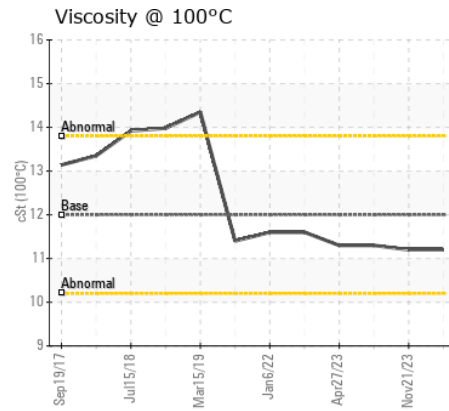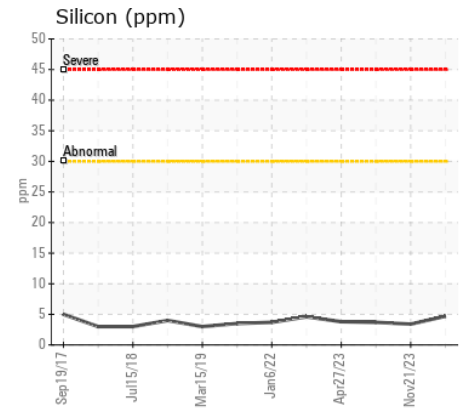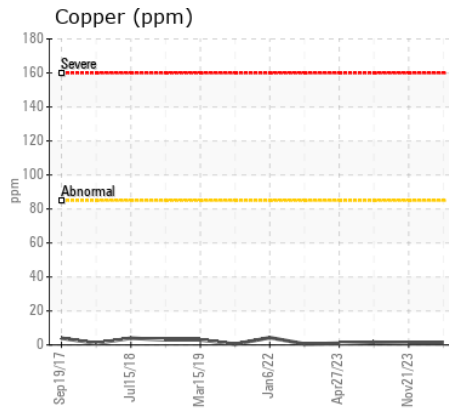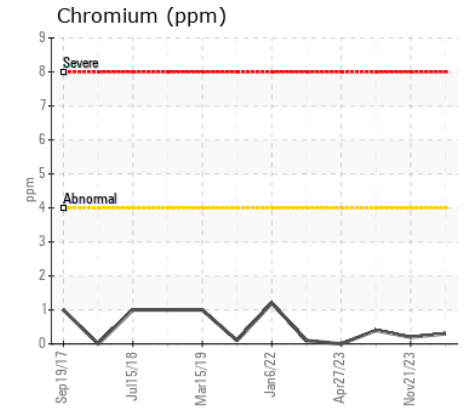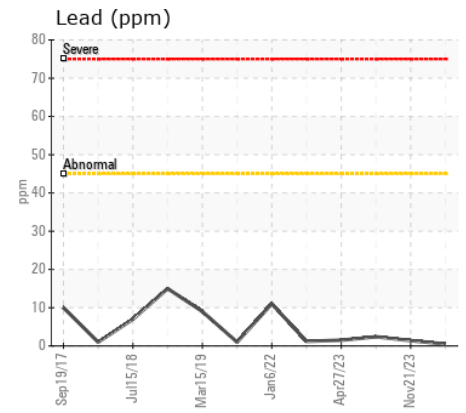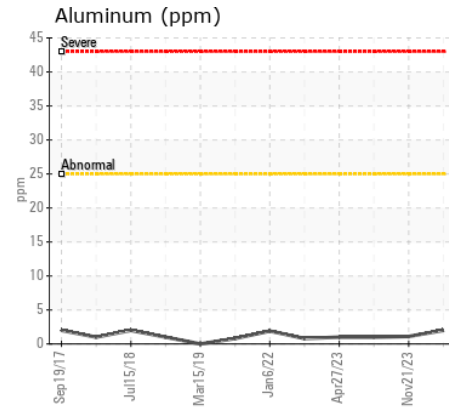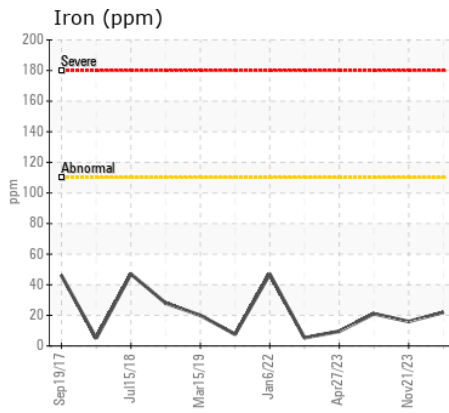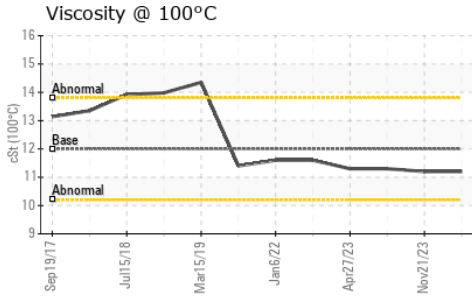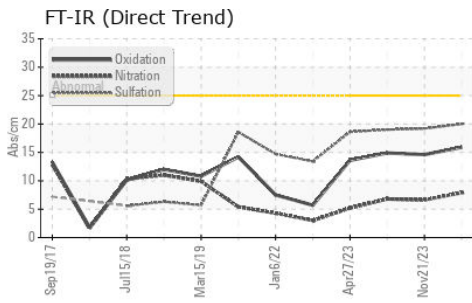

Laboratory : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9
Sample No. : GFL0118963
Lab Number : 02634002
Unique Number : 5775155
Test Package : MOB 1
Received : 08 May 2024
Tested : 08 May 2024
Diagnosed : 08 May 2024 - Wes Davis

GFL Environmental - 554 - Edmonton SW
 8409 -15th Street NW
 Edmonton, AB
 CA T6P 0B8
 Contact: Tim Greig
 tgreig@gflenv.com
 T: (780)231-0521
 F:

To discuss this sample report, contact Customer Service at 1-800-268-2131.
 Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab.
 Validity of results and interpretation are based on the sample and information as supplied.