



WEAR	<b>NORMAL</b>
CONTAMINATION	<b>NORMAL</b>
FLUID CONDITION	<b>NORMAL</b>



Machine Id  
**801068**  
Component  
**Diesel Engine**  
Fluid  
**PETRO CANADA DURON SHP 10W30 (--- LTR)**

**RECOMMENDATION**

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		<b>GFL0112562</b>	GFL0101690	GFL0097592
Sample Date		Client Info		<b>07 May 2024</b>	29 Dec 2023	29 Oct 2023
Machine Age	hrs	Client Info		<b>0</b>	13456	13115
Oil Age	hrs	Client Info		<b>0</b>	0	0
Filter Age	hrs	Client Info		<b>0</b>	0	0
Oil Changed		Client Info		<b>N/A</b>	Changed	N/A
Filter Changed		Client Info		<b>N/A</b>	Changed	N/A
Sample Status				<b>NORMAL</b>	NORMAL	NORMAL

**WEAR**

All component wear rates are normal.

Iron	ppm	ASTM D5185(m)	>80	<b>42</b>	27	47
Chromium	ppm	ASTM D5185(m)	>5	<b>1</b>	<1	1
Nickel	ppm	ASTM D5185(m)	>2	<b>&lt;1</b>	<1	<1
Titanium	ppm	ASTM D5185(m)		<b>0</b>	0	0
Silver	ppm	ASTM D5185(m)	>3	<b>0</b>	0	<1
Aluminum	ppm	ASTM D5185(m)	>30	<b>4</b>	3	4
Lead	ppm	ASTM D5185(m)	>30	<b>0</b>	0	<1
Copper	ppm	ASTM D5185(m)	>150	<b>1</b>	1	2
Tin	ppm	ASTM D5185(m)	>5	<b>0</b>	0	<1
Vanadium	ppm	ASTM D5185(m)		<b>0</b>	0	0

**CONTAMINATION**











There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185(m)	>20	<b>17</b>	4	7
Potassium	ppm	ASTM D5185(m)	>20	<b>&lt;1</b>	8	1
Fuel		WC Method	>5	<b>&lt;1.0</b>	<1.0	<1.0
Water		WC Method	>0.2	<b>NEG</b>	NEG	NEG
Glycol		WC Method		<b>NEG</b>	NEG	NEG
Soot %	%	ASTM D7844*	>3	<b>0.5</b>	0.5	0.7
Nitration	Abs/cm	ASTM D7624*	>20	<b>9.4</b>	8.6	10.2
Sulfation	Abs/.1mm	ASTM D7415*	>30	<b>20.5</b>	20.4	22.2
Emulsified Water	scalar	Visual*	>0.2	<b>NEG</b>	NEG	NEG

**FLUID CONDITION**

The condition of the oil is acceptable for the time in service.

Sodium	ppm	ASTM D5185(m)		<b>6</b>	6	10
Boron	ppm	ASTM D5185(m)	2	<b>4</b>	1	2
Barium	ppm	ASTM D5185(m)	0	<b>0</b>	0	0
Molybdenum	ppm	ASTM D5185(m)	50	<b>62</b>	60	66
Manganese	ppm	ASTM D5185(m)	0	<b>&lt;1</b>	0	0
Magnesium	ppm	ASTM D5185(m)	950	<b>1002</b>	988	1070
Calcium	ppm	ASTM D5185(m)	1050	<b>1096</b>	1101	1172
Phosphorus	ppm	ASTM D5185(m)	995	<b>1004</b>	1014	1078
Zinc	ppm	ASTM D5185(m)	1180	<b>1221</b>	1229	1332
Sulfur	ppm	ASTM D5185(m)	2600	<b>2476</b>	2660	2529
Oxidation	Abs/.1mm	ASTM D7414*	>25	<b>17.2</b>	16.5	19.6
Visc @ 100°C	cSt	ASTM D7279(m)	12.00	<b>11.4</b>	11.5	11.7

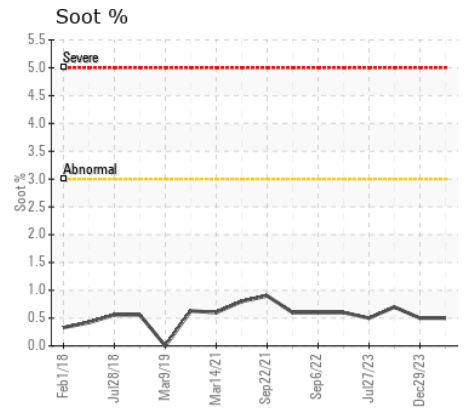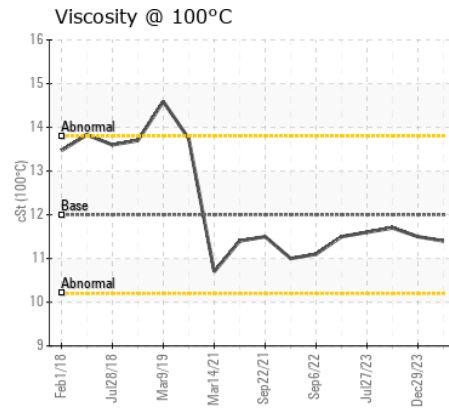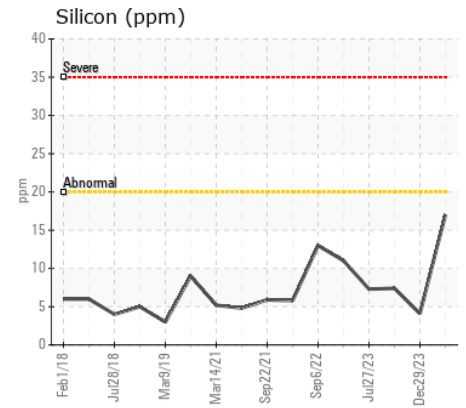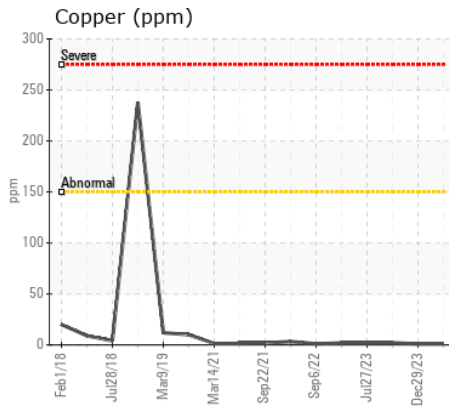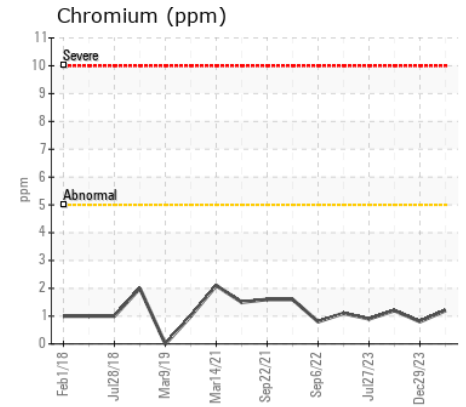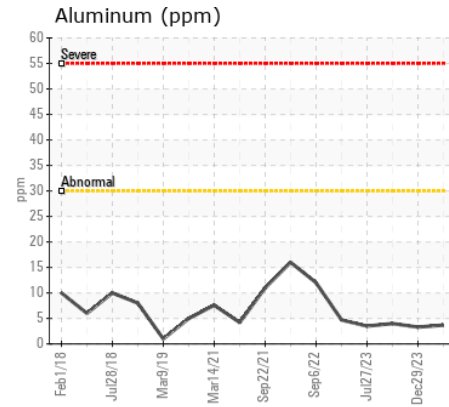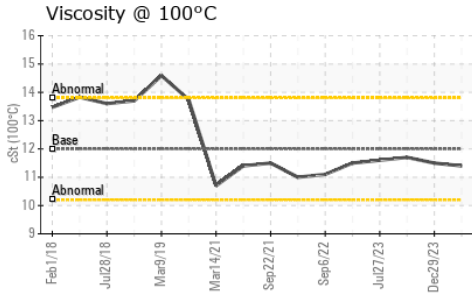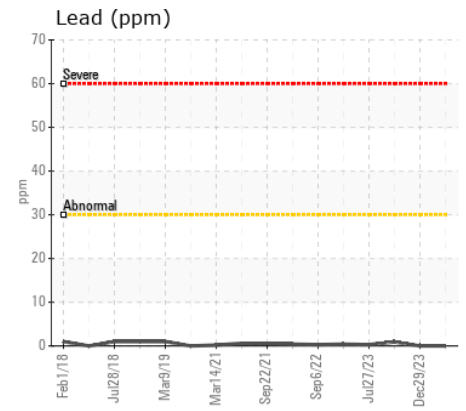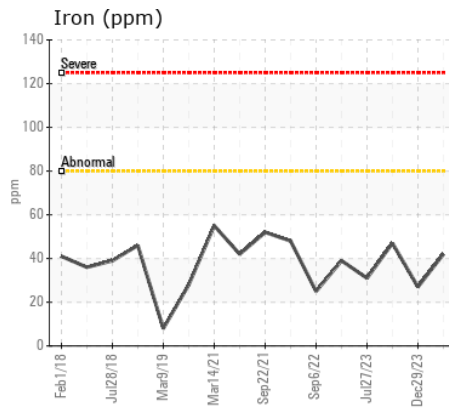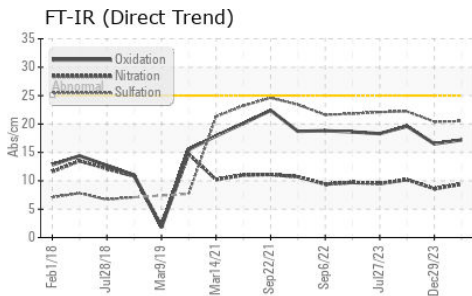

**Laboratory** : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9  
**Sample No.** : GFL0112562  
**Lab Number** : 02634078  
**Unique Number** : 5775231  
**Test Package** : MOB 1

**GFL Environmental - 554 - Edmonton SW**  
 8409 - 15th Street NW  
 Edmonton, AB  
 CA T6P 0B8  
 Contact: Tim Greig  
 tgreig@gflenv.com  
 T: (780)231-0521  
 F:

To discuss this sample report, contact Customer Service at 1-800-268-2131.  
 Test denoted (\*) outside scope of accreditation, (m) method modified, (e) tested at external lab.  
 Validity of results and interpretation are based on the sample and information as supplied.