

Machine Id
BENCHTANK
Component
Bottom Hydraulic System
Fluid
PETRO CANADA DURATRAN (--- LTR)

RECOMMENDATION

Resample at the next service interval to monitor. Please specify the component make and model with your next sample.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		PC0040964	---	---
Sample Date		Client Info		06 May 2024	---	---
Machine Age	hrs	Client Info		0	---	---
Oil Age	hrs	Client Info		0	---	---
Filter Age	hrs	Client Info		0	---	---
Oil Changed		Client Info		N/A	---	---
Filter Changed		Client Info		N/A	---	---
Sample Status				NORMAL	---	---

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185(m)	>20	1	---	---
Chromium	ppm	ASTM D5185(m)	>10	0	---	---
Nickel	ppm	ASTM D5185(m)	>10	0	---	---
Titanium	ppm	ASTM D5185(m)		0	---	---
Silver	ppm	ASTM D5185(m)		0	---	---
Aluminum	ppm	ASTM D5185(m)	>10	1	---	---
Lead	ppm	ASTM D5185(m)	>10	0	---	---
Copper	ppm	ASTM D5185(m)	>75	0	---	---
Tin	ppm	ASTM D5185(m)	>10	0	---	---
Vanadium	ppm	ASTM D5185(m)		0	---	---
White Metal	scalar	Visual*	NONE	NONE	---	---
Yellow Metal	scalar	Visual*	NONE	NONE	---	---

CONTAMINATION









The system cleanliness is acceptable for your target ISO 4406 cleanliness code. The system and fluid cleanliness is acceptable.

Silicon	ppm	ASTM D5185(m)	>20	9	---	---
Potassium	ppm	ASTM D5185(m)	>20	0	---	---
Water		WC Method	>0.1	NEG	---	---
Particles >4µm		ASTM D7647	>5000	3474	---	---
Particles >6µm		ASTM D7647	>1300	1017	---	---
Particles >14µm		ASTM D7647	>160	61	---	---
Particles >21µm		ASTM D7647	>40	18	---	---
Particles >38µm		ASTM D7647	>10	3	---	---
Particles >71µm		ASTM D7647	>3	2	---	---
Oil Cleanliness		ISO 4406 (c)	<19/17/14	19/17/13	---	---
Silt	scalar	Visual*	NONE	NONE	---	---
Debris	scalar	Visual*	NONE	NONE	---	---
Sand/Dirt	scalar	Visual*	NONE	NONE	---	---
Appearance	scalar	Visual*	NORML	NORML	---	---
Odor	scalar	Visual*	NORML	NORML	---	---
Emulsified Water	scalar	Visual*	>0.1	NEG	---	---

FLUID CONDITION

The condition of the oil is acceptable for the time in service.

Sodium	ppm	ASTM D5185(m)		0	---	---
Boron	ppm	ASTM D5185(m)	110	99	---	---
Barium	ppm	ASTM D5185(m)	0.0	0	---	---
Molybdenum	ppm	ASTM D5185(m)	0.0	0	---	---
Manganese	ppm	ASTM D5185(m)	1	0	---	---
Magnesium	ppm	ASTM D5185(m)	13	21	---	---
Calcium	ppm	ASTM D5185(m)	3610	3426	---	---
Phosphorus	ppm	ASTM D5185(m)	1192	1079	---	---
Zinc	ppm	ASTM D5185(m)	1455	1344	---	---
Sulfur	ppm	ASTM D5185(m)	2641	2546	---	---
Visc @ 40°C	cSt	ASTM D7279(m)	55.14	55.9	---	---
Visc @ 100°C	cSt	ASTM D7279(m)	9.38	9.4	---	---
Viscosity Index (VI)	Scale	ASTM D2270*	153	151	---	---

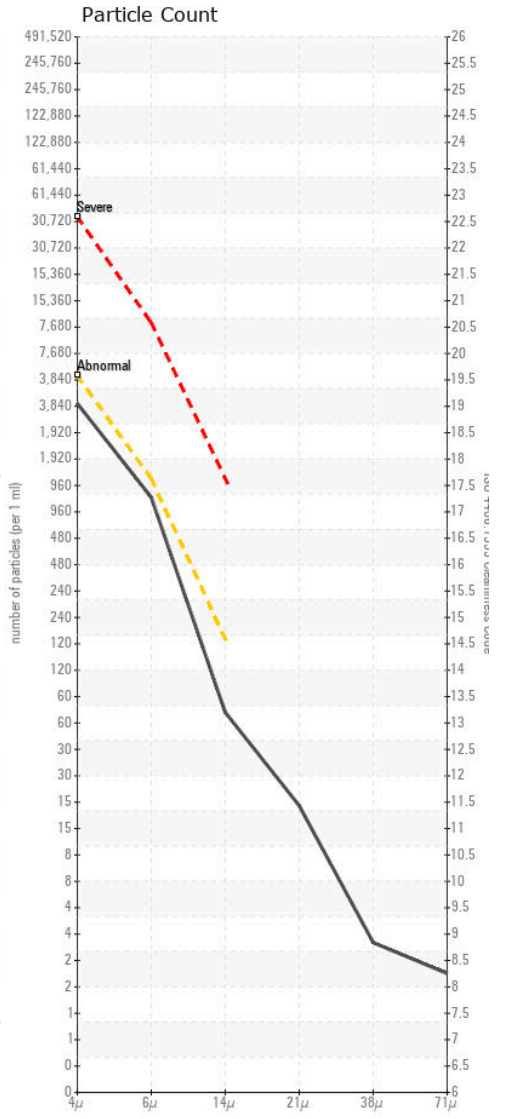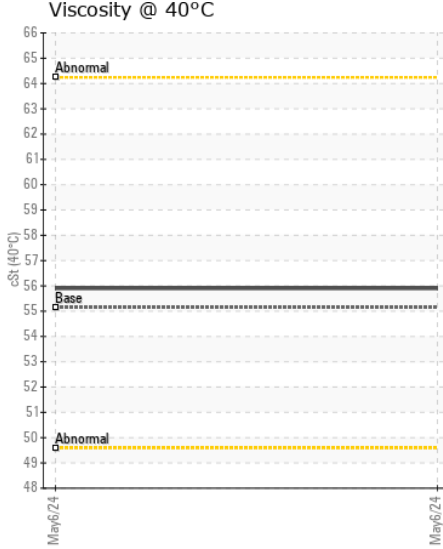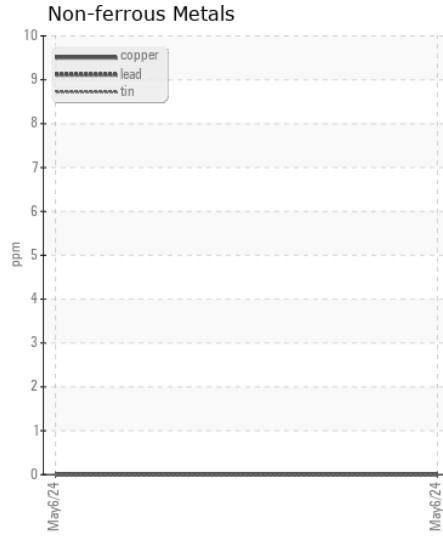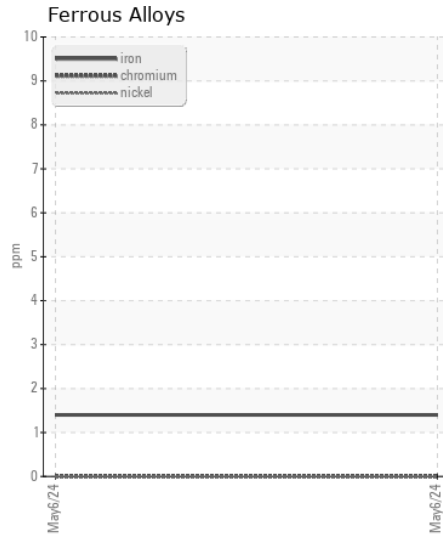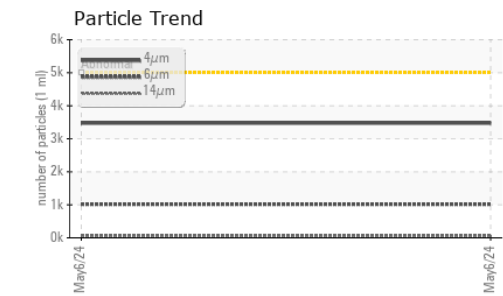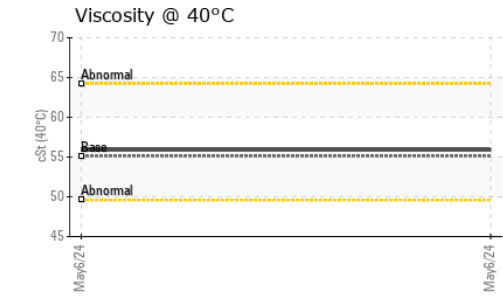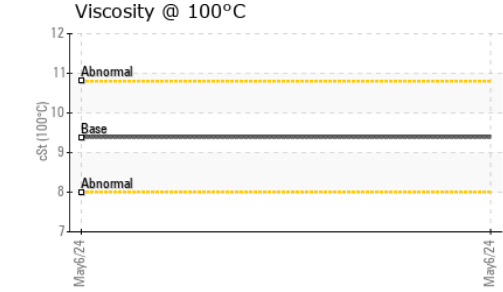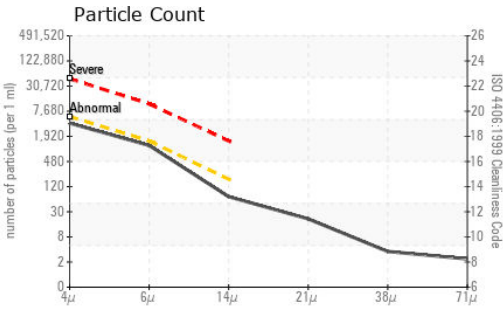

Laboratory : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9
Sample No. : PC0040964 **Received** : 08 May 2024
Lab Number : **02634096** **Tested** : 09 May 2024
Unique Number : 5775249 **Diagnosed** : 09 May 2024 - Kevin Marson
Test Package : MOB 2 (Additional Tests: KV100, VI)

BRENDONN HOLDINGS LTD
 24 BROADWAY STREET WEST
 YORKTON, SK
 CA S3N 0L4
 Contact: Tony Ripa
 tripa@bhltd.com
 T: (306)783-4567
 F: (306)783-5700

To discuss this sample report, contact Customer Service at 1-800-268-2131.
 Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab.
 Validity of results and interpretation are based on the sample and information as supplied.