



LIEBHERR

OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL



Area

(362878)

Machine Id

135287-1218

Component

Hydraulic System

Fluid

PETRO CANADA HYDREX XV ALL SEASON HYDRAULIC OIL (--- GAL)

RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		LH0276240	LH0274822	LH0284937
Sample Date		Client Info		07 May 2024	04 Mar 2024	08 Feb 2024
Machine Age	hrs	Client Info		11139	10640	10128
Oil Age	hrs	Client Info		0	0	0
Filter Age	hrs	Client Info		0	0	0
Oil Changed		Client Info		Changed	Changed	Changed
Filter Changed		Client Info		N/A	None	N/A
Sample Status				NORMAL	ATTENTION	ABNORMAL

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185(m)	>60	13	16	31
Chromium	ppm	ASTM D5185(m)	>40	2	2	4
Nickel	ppm	ASTM D5185(m)	>10	0	<1	<1
Titanium	ppm	ASTM D5185(m)		0	0	0
Silver	ppm	ASTM D5185(m)		0	0	0
Aluminum	ppm	ASTM D5185(m)	>5	<1	<1	<1
Lead	ppm	ASTM D5185(m)	>5	0	0	<1
Copper	ppm	ASTM D5185(m)	>15	2	2	4
Tin	ppm	ASTM D5185(m)	>5	0	0	0
Vanadium	ppm	ASTM D5185(m)		0	0	0
White Metal	scalar	Visual*	NONE	NONE	NONE	NONE
Yellow Metal	scalar	Visual*	NONE	NONE	NONE	NONE

CONTAMINATION








The system cleanliness is acceptable for your target ISO 4406 cleanliness code. The system and fluid cleanliness is acceptable.

Silicon	ppm	ASTM D5185(m)	>15	0	1	3
Potassium	ppm	ASTM D5185(m)	>20	0	<1	<1
Water		WC Method	>0.1	NEG	NEG	NEG
Particles >4µm		ASTM D7647	>20000	3717	● 23819	▲ 72535
Particles >6µm		ASTM D7647	>5000	879	● 6173	▲ 22140
Particles >14µm		ASTM D7647	>640	39	208	● 806
Particles >21µm		ASTM D7647	>160	6	28	103
Particles >38µm		ASTM D7647	>40	1	1	5
Particles >71µm		ASTM D7647	>10	0	0	0
Oil Cleanliness		ISO 4406 (c)	>21/19/16	19/17/12	● 22/20/15	▲ 23/22/17
Silt	scalar	Visual*	NONE	NONE	NONE	NONE
Debris	scalar	Visual*	NONE	NONE	NONE	▲ VLITE
Sand/Dirt	scalar	Visual*	NONE	NONE	NONE	NONE
Appearance	scalar	Visual*	NORML	NORML	NORML	WGOIL
Odor	scalar	Visual*	NORML	NORML	NORML	NORML
Emulsified Water	scalar	Visual*	>0.1	NEG	NEG	.2%

FLUID CONDITION

The condition of the oil is acceptable for the time in service.

Sodium	ppm	ASTM D5185(m)		<1	<1	<1
Boron	ppm	ASTM D5185(m)	0	1	<1	<1
Barium	ppm	ASTM D5185(m)	0	0	0	0
Molybdenum	ppm	ASTM D5185(m)	0	0	0	0
Manganese	ppm	ASTM D5185(m)	1	0	0	0
Magnesium	ppm	ASTM D5185(m)	0	2	1	3
Calcium	ppm	ASTM D5185(m)	100	125	154	211
Phosphorus	ppm	ASTM D5185(m)	670	456	495	432
Zinc	ppm	ASTM D5185(m)	850	571	600	520
Sulfur	ppm	ASTM D5185(m)	1600	1770	1520	1502
Visc @ 40°C	cSt	ASTM D7279(m)	47.9	43.9	43.6	43.3

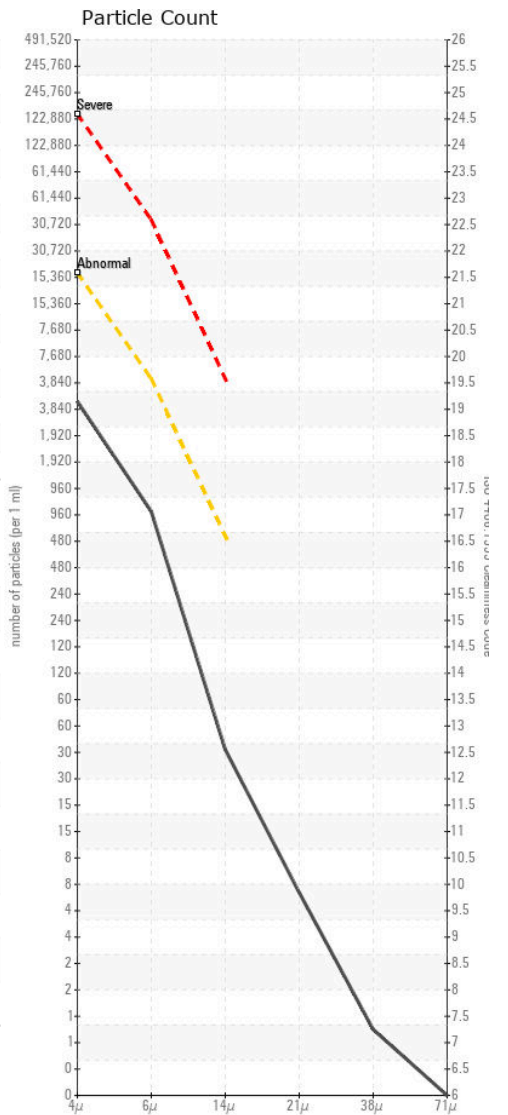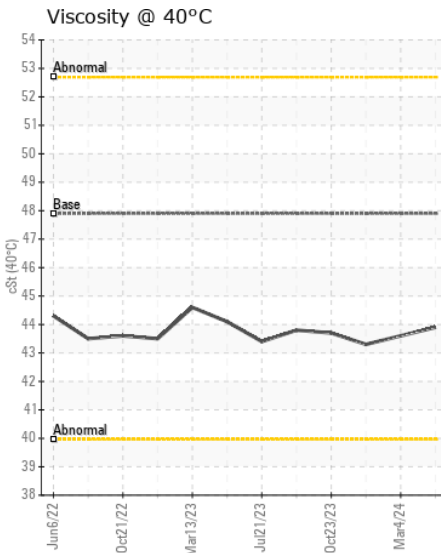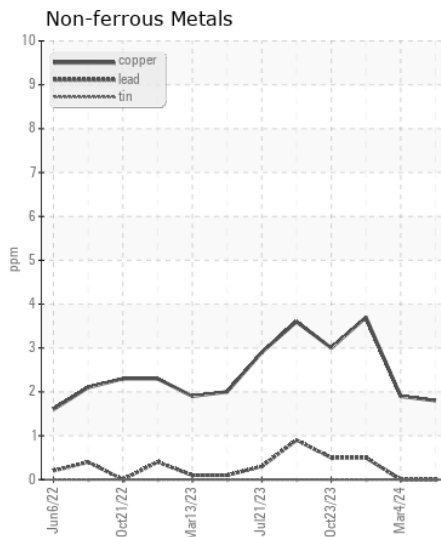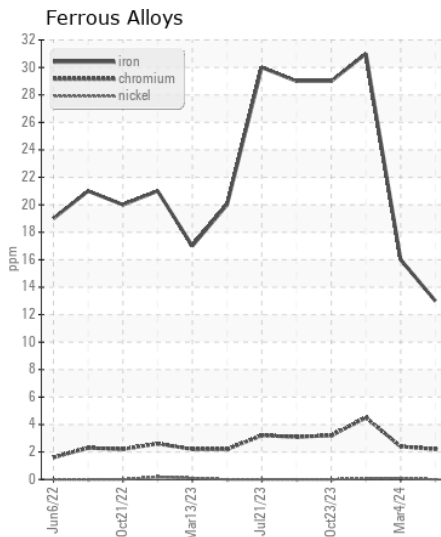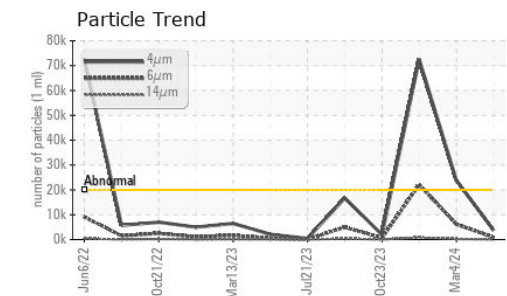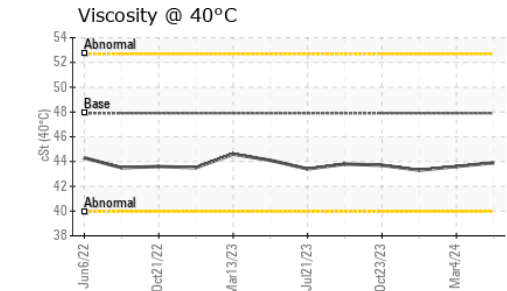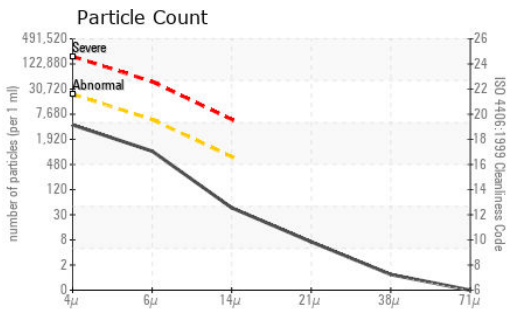

ISO 17025:2017
Accredited
Laboratory

Laboratory : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9
Sample No. : LH0276240 **Received** : 08 May 2024
Lab Number : 02634159 **Tested** : 10 May 2024
Unique Number : 5775312 **Diagnosed** : 10 May 2024 - Wes Davis
Test Package : MOB 1 (Additional Tests: PrtCount)

To discuss this sample report, contact Customer Service at 1-800-268-2131.
 Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab.
 Validity of results and interpretation are based on the sample and information as supplied.

GERDAU AMERISTEEL
 1 GERDAU COURT
 WHITBY, ON
 CA L1N 5T1
 Contact: Tyson Young
 tyoung@gerdauameristeel.com
 T: (905)668-8811
 F: (905)668-6469