



LIEBHERR

OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL



Area
(358628)
Machine Id
LIEBHERR R914 047334-1511
Component
Diesel Engine
Fluid
PETRO CANADA SUPREME 5W30 (--- GAL)

RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		LH0289874	LH	LH0261014
Sample Date		Client Info		10 Dec 2023	23 Nov 2023	05 Jun 2023
Machine Age	hrs	Client Info		1000	3825	3700
Oil Age	hrs	Client Info		0	0	0
Filter Age	hrs	Client Info		0	0	0
Oil Changed		Client Info		Changed	Changed	Changed
Filter Changed		Client Info		Changed	N/A	N/A
Sample Status				NORMAL	NORMAL	NORMAL

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185(m)	>100	20	18	12
Chromium	ppm	ASTM D5185(m)	>5	3	2	2
Nickel	ppm	ASTM D5185(m)	>5	0	<1	<1
Titanium	ppm	ASTM D5185(m)		0	0	<1
Silver	ppm	ASTM D5185(m)	>3	0	<1	0
Aluminum	ppm	ASTM D5185(m)	>15	4	4	3
Lead	ppm	ASTM D5185(m)	>30	0	<1	<1
Copper	ppm	ASTM D5185(m)	>125	2	1	<1
Tin	ppm	ASTM D5185(m)	>5	0	0	0
Vanadium	ppm	ASTM D5185(m)		0	0	0

CONTAMINATION











There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185(m)	>60	8	6	8
Potassium	ppm	ASTM D5185(m)	>20	1	0	<1
Fuel		WC Method	>5	<1.0	<1.0	<1.0
Water		WC Method	>0.2	NEG	NEG	NEG
Glycol		WC Method		NEG	NEG	NEG
Soot %	%	ASTM D7844*	>3	0.1	0.1	0
Nitration	Abs/cm	ASTM D7624*	>20	8.9	6.6	7.8
Sulfation	Abs/.1mm	ASTM D7415*	>30	20.3	18.9	19.2
Emulsified Water	scalar	Visual*	>0.2	NEG	NEG	NEG

FLUID CONDITION

The condition of the oil is acceptable for the time in service.

Sodium	ppm	ASTM D5185(m)		5	2	4
Boron	ppm	ASTM D5185(m)	186	28	7	40
Barium	ppm	ASTM D5185(m)	<1	0	<1	0
Molybdenum	ppm	ASTM D5185(m)	79	65	60	58
Manganese	ppm	ASTM D5185(m)	0	<1	0	<1
Magnesium	ppm	ASTM D5185(m)	578	1187	998	1104
Calcium	ppm	ASTM D5185(m)	1002	931	1125	873
Phosphorus	ppm	ASTM D5185(m)	745	1046	990	1093
Zinc	ppm	ASTM D5185(m)	837	1281	1209	1208
Sulfur	ppm	ASTM D5185(m)	2502	2860	2514	2791
Oxidation	Abs/.1mm	ASTM D7414*	>25	18.2	14.7	16.4
Visc @ 100°C	cSt	ASTM D7279(m)	11.42	12.1	13.3	11.8

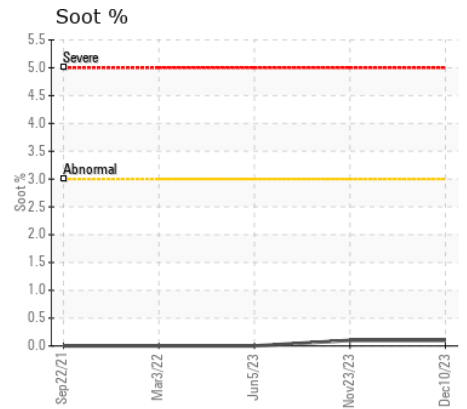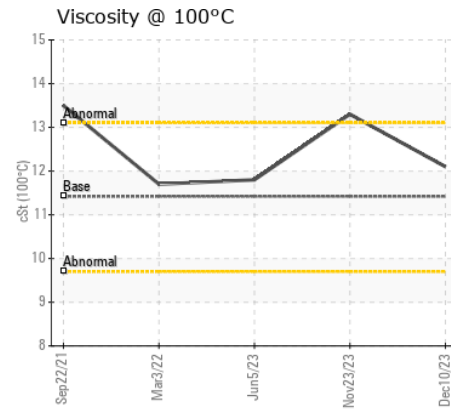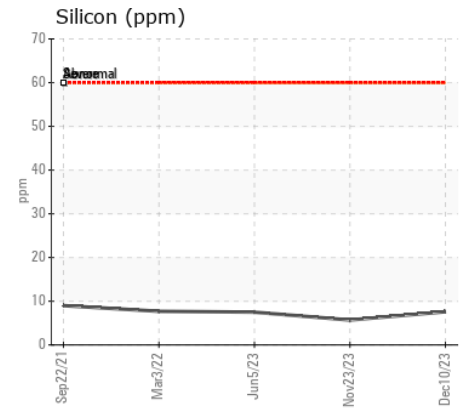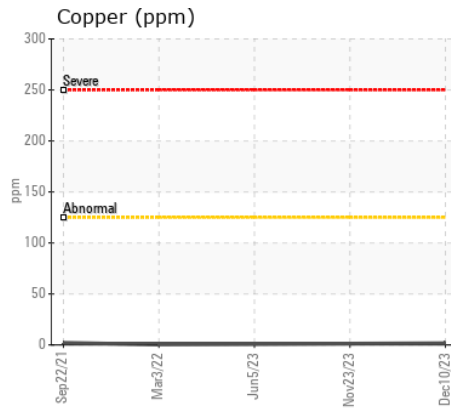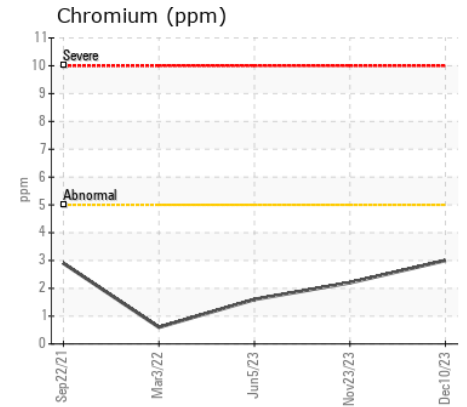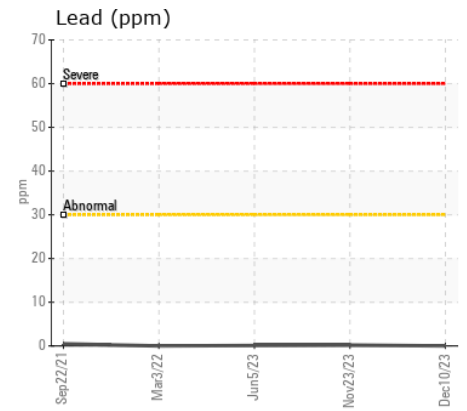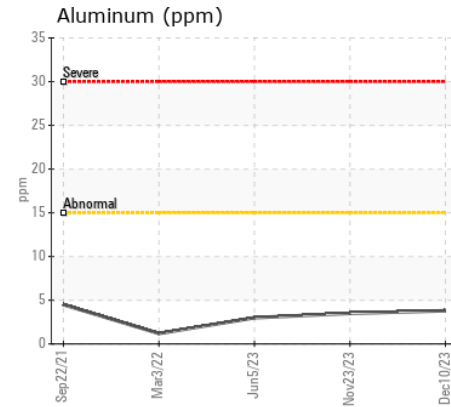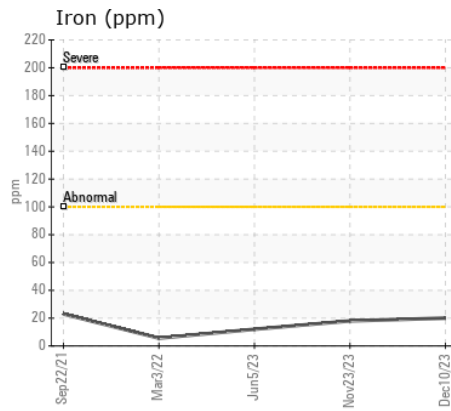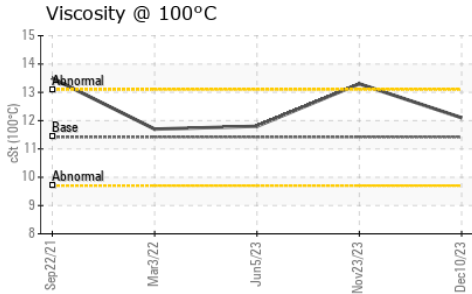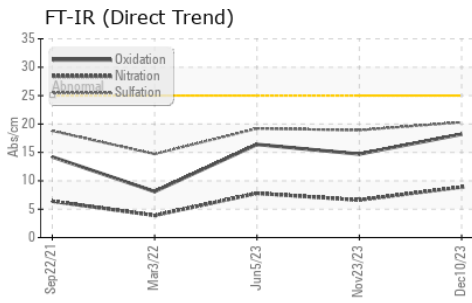

Laboratory : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9
Sample No. : LH0289874 **Received** : 09 May 2024
Lab Number : 02634263 **Tested** : 09 May 2024
Unique Number : 5775416 **Diagnosed** : 09 May 2024 - Wes Davis
Test Package : MOB 1

To discuss this sample report, contact Customer Service at 1-800-268-2131.
 Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab.
 Validity of results and interpretation are based on the sample and information as supplied.

L.A.H. EQUIPMENT INC.
 9700 PLACE JADE
 BROSSARD, QC
 CA J4Y 3C1
 Contact: Sylvain Allard
 sylvain.allard@lahebert.ca
 T: (450)444-4847
 F: (450)444-3578