



WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Machine Id
5663
 Component
Diesel Engine
 Fluid
PETRO CANADA DURON SHP 10W30 (--- GAL)

RECOMMENDATION

Confirmez la source du lubrifiant utilisé pour l'appoint/remplissage.
 Échantillonner de nouveau l'équipement au prochain intervalle de vidange afin d'en surveiller la condition.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		GFL0119594	GFL0094575	GFL0070800
Sample Date		Client Info		07 May 2024	07 Nov 2023	02 Mar 2023
Machine Age	hrs	Client Info		25119	0	120
Oil Age	hrs	Client Info		0	600	7
Filter Age	hrs	Client Info		0	0	7
Oil Changed		Client Info		Changed	Changed	Changed
Filter Changed		Client Info		Changed	Not Changed	Changed
Sample Status				NORMAL	NORMAL	ABNORMAL

WEAR

Les taux d'usure de tous les composants sont normaux.

Iron	ppm	ASTM D5185(m)	>100	5	9	11
Chromium	ppm	ASTM D5185(m)	>20	0	<1	<1
Nickel	ppm	ASTM D5185(m)	>4	0	<1	0
Titanium	ppm	ASTM D5185(m)		0	0	<1
Silver	ppm	ASTM D5185(m)	>3	0	<1	0
Aluminum	ppm	ASTM D5185(m)	>20	2	3	3
Lead	ppm	ASTM D5185(m)	>40	0	0	0
Copper	ppm	ASTM D5185(m)	>330	<1	<1	<1
Tin	ppm	ASTM D5185(m)	>15	0	0	0
Vanadium	ppm	ASTM D5185(m)		0	0	0

CONTAMINATION












Il n'y a aucun indice de contamination dans l'huile.

Silicon	ppm	ASTM D5185(m)	>25	4	3	4
Potassium	ppm	ASTM D5185(m)	>20	2	<1	3
Fuel		WC Method	>5	<1.0	<1.0	0.9
Water		WC Method	>0.2	NEG	NEG	NEG
Glycol		WC Method		NEG	NEG	NEG
Soot %	%	ASTM D7844*	>3	0.1	0.3	0.1
Nitration	Abs/cm	ASTM D7624*	>20	7.9	7.6	9.3
Sulfation	Abs/.1mm	ASTM D7415*	>30	18.2	18.5	21.5
Emulsified Water	scalar	Visual*	>0.2	NEG	NEG	NEG

FLUID CONDITION

Les niveaux d'additifs indiquent l'ajout d'une autre marque ou d'un autre type d'huile. L'état de l'huile est acceptable pour la durée de service.

Sodium	ppm	ASTM D5185(m)		2	2	4
Boron	ppm	ASTM D5185(m)	2	74	4	6
Barium	ppm	ASTM D5185(m)	0	0	<1	0
Molybdenum	ppm	ASTM D5185(m)	50	12	59	60
Manganese	ppm	ASTM D5185(m)	0	0	0	<1
Magnesium	ppm	ASTM D5185(m)	950	740	952	976
Calcium	ppm	ASTM D5185(m)	1050	1342	1031	1182
Phosphorus	ppm	ASTM D5185(m)	995	723	996	1111
Zinc	ppm	ASTM D5185(m)	1180	807	1180	1225
Sulfur	ppm	ASTM D5185(m)	2600	2520	2525	2699
Oxidation	Abs/.1mm	ASTM D7414*	>25	12.6	13.9	16.5
Visc @ 100°C	cSt	ASTM D7279(m)	12.00	11.3	11.5	▲ 11.5

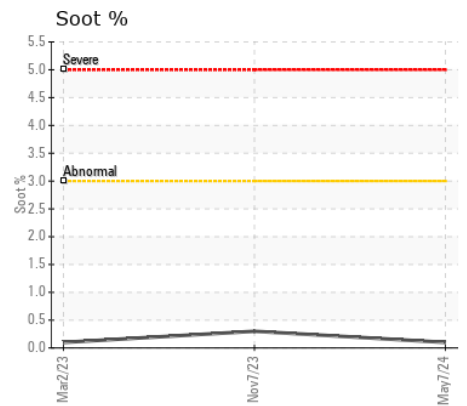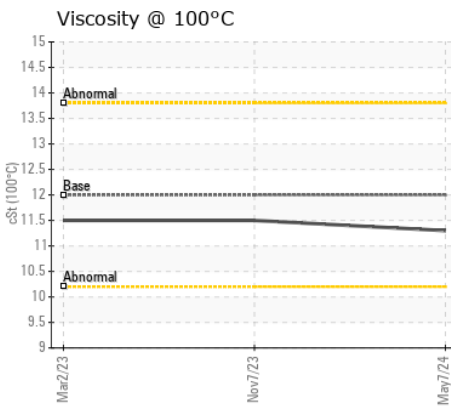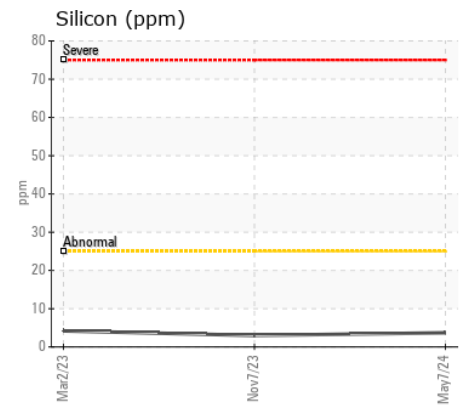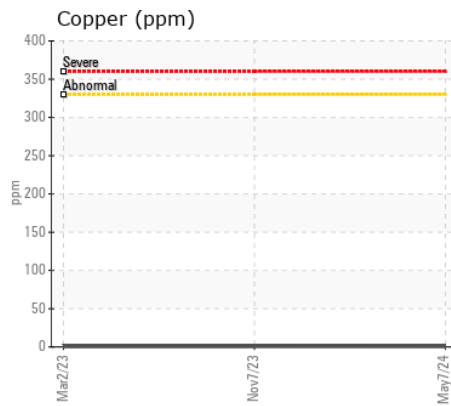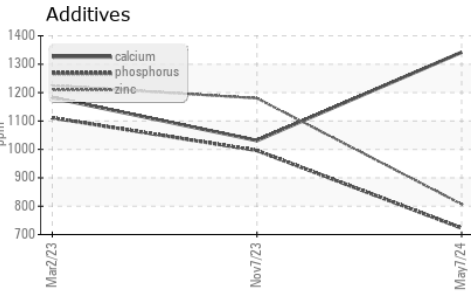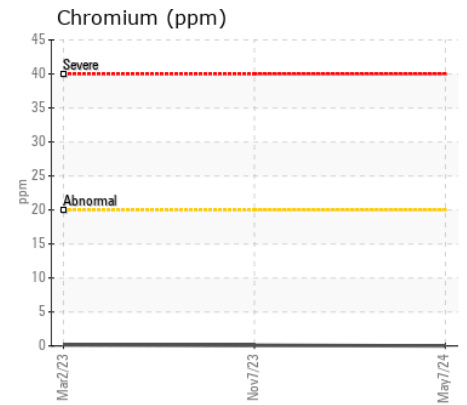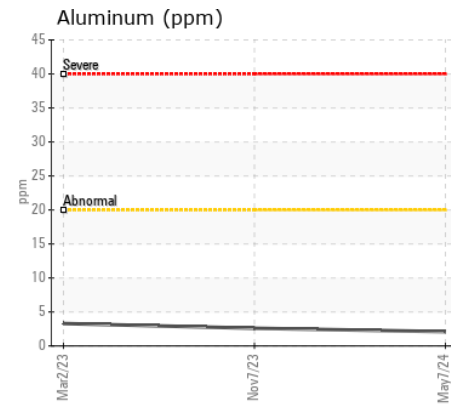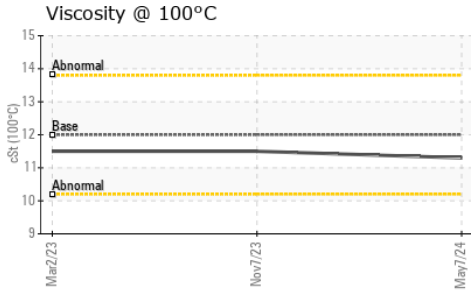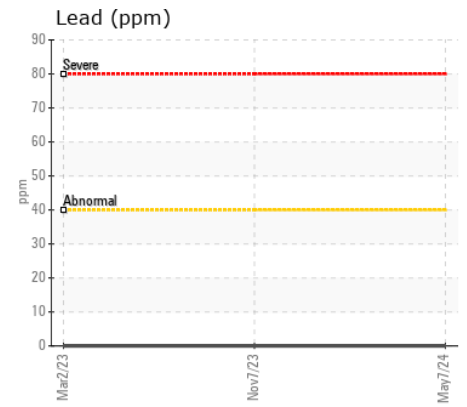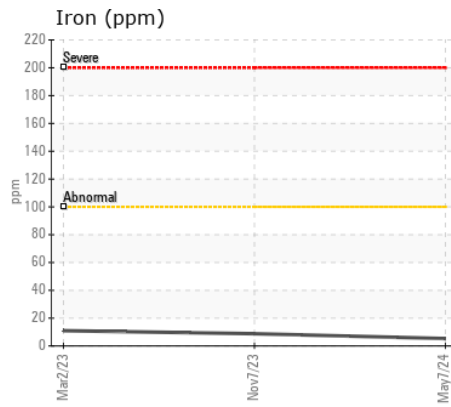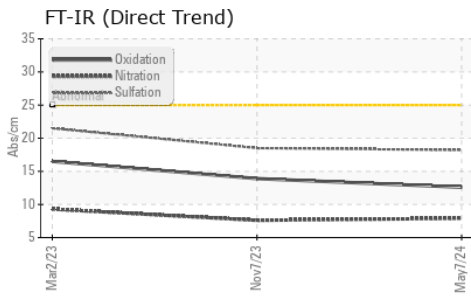

Laboratory : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9
Sample No. : GFL0119594
Lab Number : 02634285
Unique Number : 5775438
Test Package : MOB 1

GFL Environmental - 736 - Trois-Rivieres
 2920 Bellefeuille,
 Trois-Rivieres, QC
 CA G9A 5R5
 Contact: Jean Demontigny
 jdemontigny@matrec.ca
 T: (819)378-4881
 F:

To discuss this sample report, contact Customer Service at 1-800-268-2131.
 Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab.
 Validity of results and interpretation are based on the sample and information as supplied.