



OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Machine Id
DWGCWLECTN1010257
 Component
Hydraulic System
 Fluid
AW HYDRAULIC OIL ISO 46 (--- GAL)

RECOMMENDATION

Resample at the next service interval to monitor. Please specify the component make and model with your next sample. Please contact your representative for information regarding the proper sampling kits for your service. NOTE: We recommend using MOB 2 test kits, this testkit includes Particle Count to determine the ISO cleanliness of the fluid.

WEAR

All component wear rates are normal.










CONTAMINATION

There is no indication of any contamination in the component(unconfirmed).

FLUID CONDITION

The condition of the oil is acceptable for the time in service.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		WC0851974	WC0852023	---
Sample Date		Client Info		02 May 2024	27 Dec 2023	---
Machine Age	hrs	Client Info		1500	1028	---
Oil Age	hrs	Client Info		1500	1028	---
Filter Age	hrs	Client Info		1500	528	---
Oil Changed		Client Info		Not Chngd	N/A	---
Filter Changed		Client Info		Not Chngd	Changed	---
Sample Status				NORMAL	NORMAL	---
Iron	ppm	ASTM D5185(m)	>20	4	3	---
Chromium	ppm	ASTM D5185(m)	>10	0	0	---
Nickel	ppm	ASTM D5185(m)	>10	0	<1	---
Titanium	ppm	ASTM D5185(m)		0	0	---
Silver	ppm	ASTM D5185(m)		0	<1	---
Aluminum	ppm	ASTM D5185(m)	>10	2	1	---
Lead	ppm	ASTM D5185(m)	>10	<1	2	---
Copper	ppm	ASTM D5185(m)	>75	38	37	---
Tin	ppm	ASTM D5185(m)	>10	0	0	---
Vanadium	ppm	ASTM D5185(m)		0	0	---
White Metal	scalar	Visual*	NONE	NONE	NONE	---
Yellow Metal	scalar	Visual*	NONE	NONE	NONE	---
Silicon	ppm	ASTM D5185(m)	>20	2	2	---
Potassium	ppm	ASTM D5185(m)	>20	<1	0	---
Water		WC Method	>0.1	NEG	NEG	---
Silt	scalar	Visual*	NONE	NONE	NONE	---
Debris	scalar	Visual*	NONE	NONE	NONE	---
Sand/Dirt	scalar	Visual*	NONE	NONE	NONE	---
Appearance	scalar	Visual*	NORML	NORML	NORML	---
Odor	scalar	Visual*	NORML	NORML	NORML	---
Emulsified Water	scalar	Visual*	>0.1	NEG	NEG	---
Sodium	ppm	ASTM D5185(m)		<1	<1	---
Boron	ppm	ASTM D5185(m)	5	15	15	---
Barium	ppm	ASTM D5185(m)	5	<1	0	---
Molybdenum	ppm	ASTM D5185(m)	5	0	0	---
Manganese	ppm	ASTM D5185(m)		0	0	---
Magnesium	ppm	ASTM D5185(m)	25	9	2	---
Calcium	ppm	ASTM D5185(m)	200	161	145	---
Phosphorus	ppm	ASTM D5185(m)	300	461	466	---
Zinc	ppm	ASTM D5185(m)	370	655	655	---
Sulfur	ppm	ASTM D5185(m)	2500	1288	1119	---
Visc @ 40°C	cSt	ASTM D7279(m)	46	43.2	44.1	---

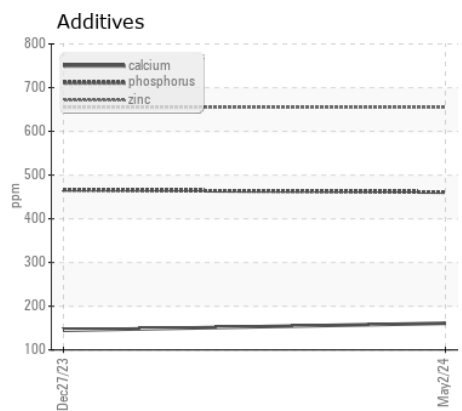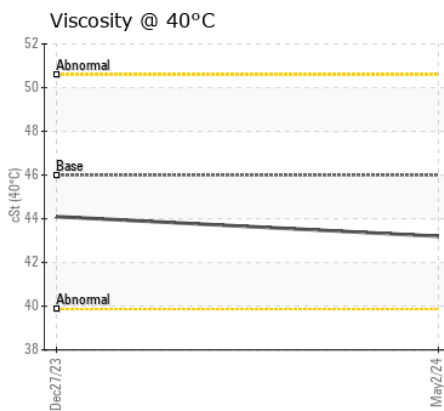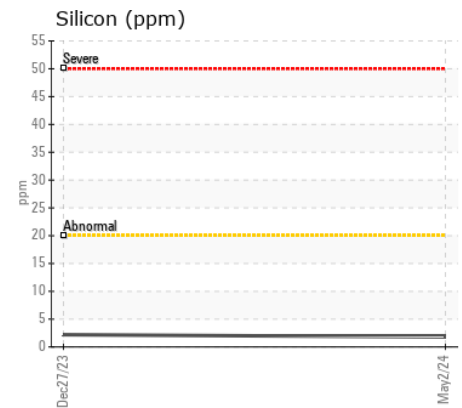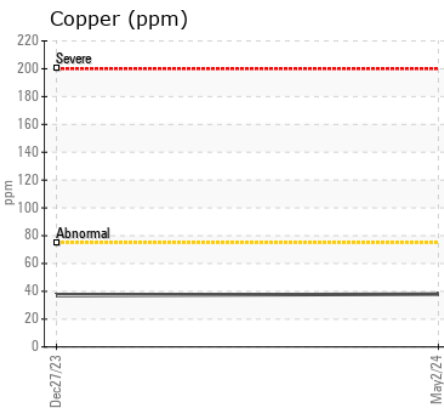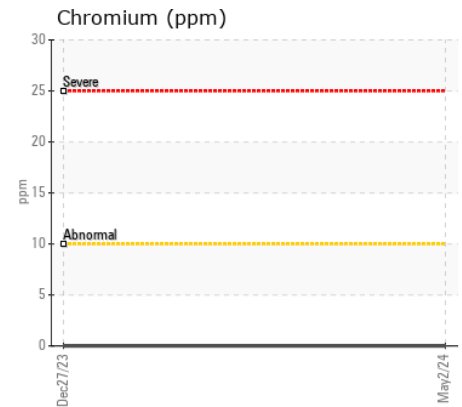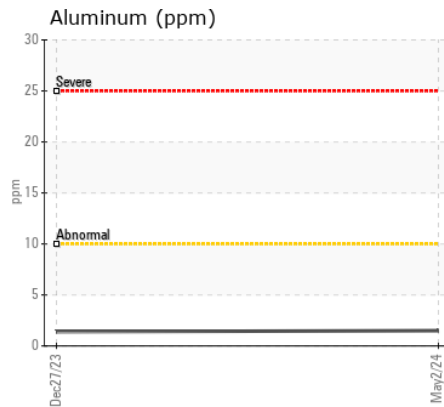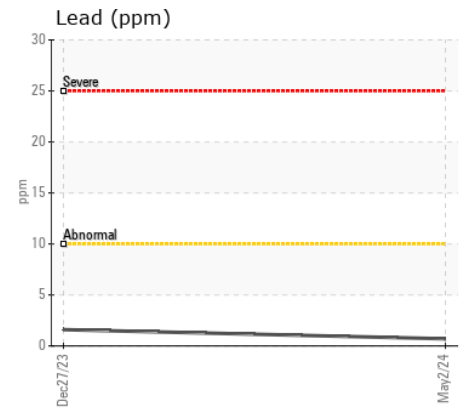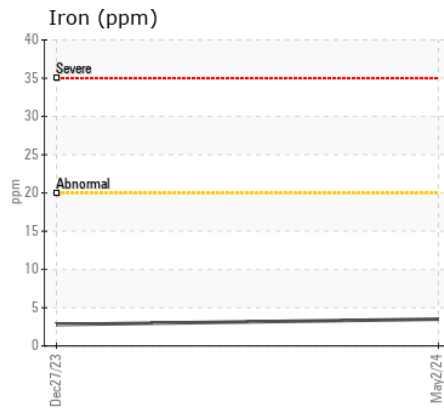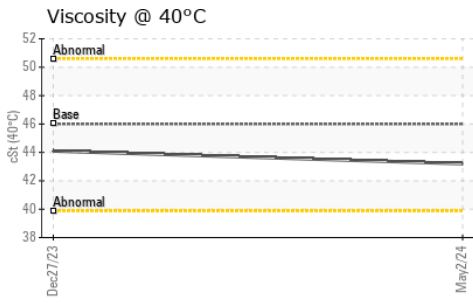

Laboratory : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9
Sample No. : WC0851974 **Received** : 09 May 2024
Lab Number : 02634357 **Tested** : 09 May 2024
Unique Number : 5775510 **Diagnosed** : 10 May 2024 - Kevin Marson
Test Package : MOB 1

C.G. EQUIPMENT
 7367 Wellington Rd. 30, Unit A
 Guelph, ON
 CA N0M 2T0
 Contact: CG Equipment CG Guelph
 cory@cgequipment.com
 T: (519)826-0550
 F: (519)837-2055

To discuss this sample report, contact Customer Service at 1-800-268-2131.
 Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab.
 Validity of results and interpretation are based on the sample and information as supplied.