



LIEBHERR

OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL



Area
(358628)

Machine Id
LIEBHERR R914 047334-1511

Component
Hydraulic System

Fluid
PETRO CANADA HYDREX XV ALL SEASON HYDRAULIC OIL (100 LTR)

RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		LH0289875	LH	LH0261015
Sample Date		Client Info		10 Dec 2023	23 Nov 2023	05 Jun 2023
Machine Age	hrs	Client Info		1000	3825	3900
Oil Age	hrs	Client Info		0	0	0
Filter Age	hrs	Client Info		0	0	0
Oil Changed		Client Info		Not Changd	Not Changd	Not Changd
Filter Changed		Client Info		Not Changd	N/A	N/A
Sample Status				NORMAL	ABNORMAL	NORMAL

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185(m)	>50	8	13	7
Chromium	ppm	ASTM D5185(m)	>15	0	<1	0
Nickel	ppm	ASTM D5185(m)	>5	0	<1	0
Titanium	ppm	ASTM D5185(m)		<1	0	0
Silver	ppm	ASTM D5185(m)		0	<1	0
Aluminum	ppm	ASTM D5185(m)	>8	<1	<1	<1
Lead	ppm	ASTM D5185(m)	>5	0	<1	<1
Copper	ppm	ASTM D5185(m)	>15	2	3	2
Tin	ppm	ASTM D5185(m)	>5	0	0	0
Vanadium	ppm	ASTM D5185(m)		0	0	0
White Metal	scalar	Visual*	NONE	NONE	NONE	NONE
Yellow Metal	scalar	Visual*	NONE	NONE	NONE	NONE

CONTAMINATION








The system cleanliness is acceptable for your target ISO 4406 cleanliness code. The system and fluid cleanliness is acceptable.

Silicon	ppm	ASTM D5185(m)	>25	0	2	1
Potassium	ppm	ASTM D5185(m)	>20	<1	0	<1
Water		WC Method	>0.1	NEG	NEG	NEG
Particles >4µm		ASTM D7647	>20000	5220	▲ 48183	16052
Particles >6µm		ASTM D7647	>5000	1166	4948	2617
Particles >14µm		ASTM D7647	>640	79	30	166
Particles >21µm		ASTM D7647	>160	20	4	48
Particles >38µm		ASTM D7647	>40	3	0	3
Particles >71µm		ASTM D7647	>10	2	0	0
Oil Cleanliness		ISO 4406 (c)	>21/19/16	20/17/13	▲ 23/19/12	21/19/15
Silt	scalar	Visual*	NONE	NONE	VLITE	NONE
Debris	scalar	Visual*	NONE	NONE	NONE	NONE
Sand/Dirt	scalar	Visual*	NONE	NONE	NONE	NONE
Appearance	scalar	Visual*	NORML	NORML	NORML	NORML
Odor	scalar	Visual*	NORML	NORML	NORML	NORML
Emulsified Water	scalar	Visual*	>0.1	NEG	NEG	NEG

FLUID CONDITION

The condition of the oil is acceptable for the time in service.

Sodium	ppm	ASTM D5185(m)		1	1	<1
Boron	ppm	ASTM D5185(m)	0	2	4	<1
Barium	ppm	ASTM D5185(m)	0	0	<1	0
Molybdenum	ppm	ASTM D5185(m)	0	0	0	0
Manganese	ppm	ASTM D5185(m)	1	0	0	0
Magnesium	ppm	ASTM D5185(m)	0	4	3	4
Calcium	ppm	ASTM D5185(m)	100	646	406	279
Phosphorus	ppm	ASTM D5185(m)	670	612	571	586
Zinc	ppm	ASTM D5185(m)	850	727	711	667
Sulfur	ppm	ASTM D5185(m)	1600	2475	1949	1744
Visc @ 40°C	cSt	ASTM D7279(m)	47.9	44.9	44.2	45.5

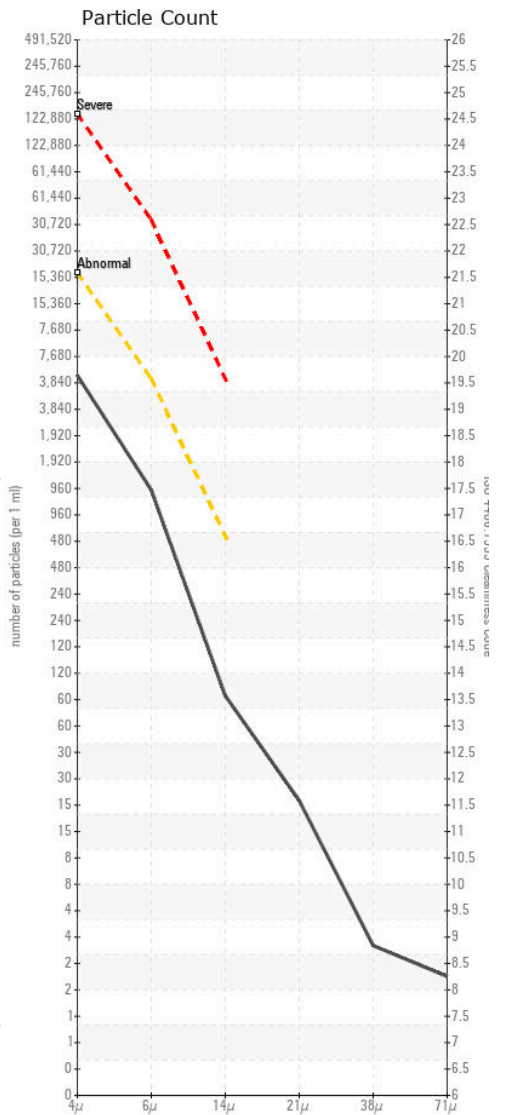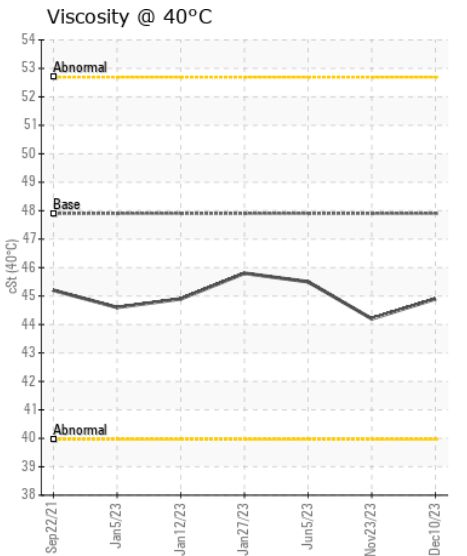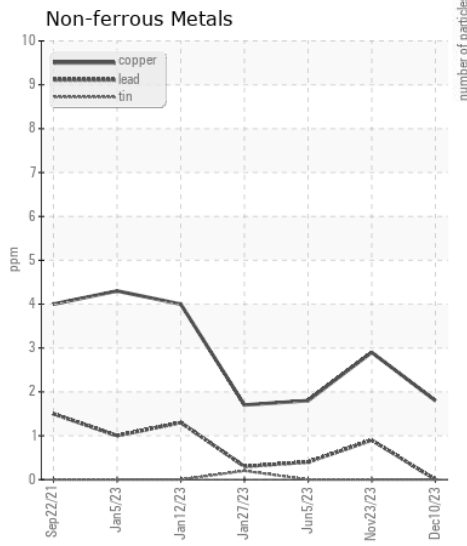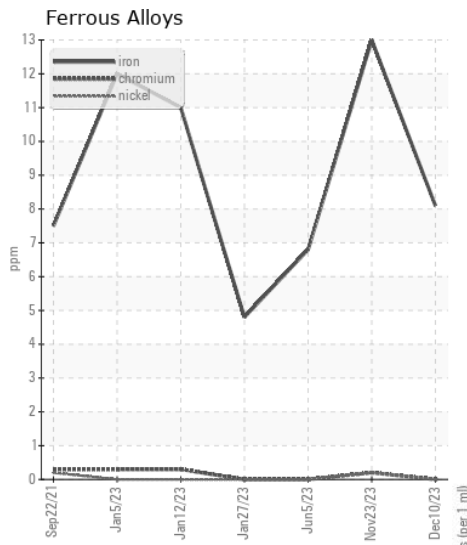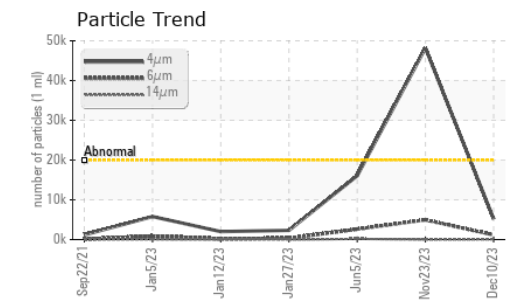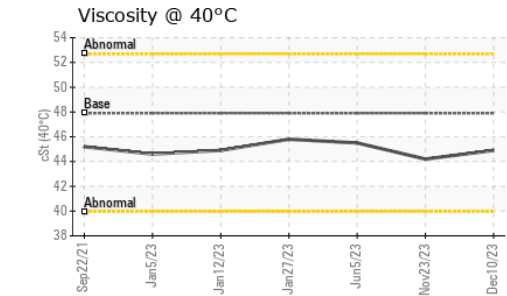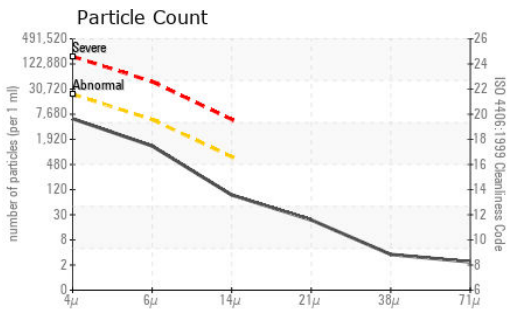

ISO 17025:2017
Accredited
Laboratory

Laboratory : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9
Sample No. : LH0289875
Lab Number : 02634358
Unique Number : 5775511
Test Package : MOB 1 (Additional Tests: PrtCount)

Received : 09 May 2024
Tested : 10 May 2024
Diagnosed : 10 May 2024 - Wes Davis

To discuss this sample report, contact Customer Service at 1-800-268-2131.
 Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab.
 Validity of results and interpretation are based on the sample and information as supplied.

L.A.H. EQUIPMENT INC.
 9700 PLACE JADE
 BROSSARD, QC
 CA J4Y 3C1
 Contact: Sylvain Allard
 sylvain.allard@lahebert.ca
 T: (450)444-4847
 F: (450)444-3578