

Machine Id
701118
Component
Transmission (Auto)
Fluid
DEXRON III (--- GAL)

RECOMMENDATION

Échantillonner de nouveau l'équipement au prochain intervalle de vidange afin d'en surveiller la condition. Le fluide n'était pas spécifié, toutefois, une comparaison avec d'autres fluides indique que ce fluide est du (GENERIC) DEXRON III. Veuillez confirmer.

WEAR

Les taux d'usure de tous les composants sont normaux.











CONTAMINATION

Il n'y a aucun indice de contamination dans le fluide.

FLUID CONDITION

L'état de le fluide est acceptable pour la durée de service.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		PC0088241	PC0071749	PC0059884
Sample Date		Client Info		07 May 2024	16 May 2023	08 Jun 2022
Machine Age	kms	Client Info		215838	0	207264
Oil Age	kms	Client Info		0	0	0
Filter Age	kms	Client Info		0	0	0
Oil Changed		Client Info		Not Changd	N/A	N/A
Filter Changed		Client Info		Changed	N/A	N/A
Sample Status				NORMAL	NORMAL	ABNORMAL
Iron	ppm	ASTM D5185(m)	>160	28	80	122
Chromium	ppm	ASTM D5185(m)	>5	0	<1	1
Nickel	ppm	ASTM D5185(m)	>5	0	<1	<1
Titanium	ppm	ASTM D5185(m)		0	0	0
Silver	ppm	ASTM D5185(m)	>5	0	0	0
Aluminum	ppm	ASTM D5185(m)	>50	9	26	17
Lead	ppm	ASTM D5185(m)	>50	0	2	1
Copper	ppm	ASTM D5185(m)	>225	19	43	40
Tin	ppm	ASTM D5185(m)	>10	0	1	<1
Vanadium	ppm	ASTM D5185(m)		0	0	0
White Metal	scalar	Visual*	NONE	NONE	NONE	NONE
Yellow Metal	scalar	Visual*	NONE	NONE	NONE	NONE
Silicon	ppm	ASTM D5185(m)	>20	8	12	▲ 26
Potassium	ppm	ASTM D5185(m)	>20	<1	1	2
Water		WC Method	>0.1	NEG	NEG	NEG
Silt	scalar	Visual*	NONE	NONE	NONE	NONE
Debris	scalar	Visual*	NONE	VLITE	NONE	VLITE
Sand/Dirt	scalar	Visual*	NONE	NONE	NONE	NONE
Appearance	scalar	Visual*	NORML	NORML	NORML	NORML
Odor	scalar	Visual*	NORML	NORML	NORML	NORML
Emulsified Water	scalar	Visual*	>0.1	NEG	NEG	NEG
Sodium	ppm	ASTM D5185(m)		25	81	61
Boron	ppm	ASTM D5185(m)		73	82	63
Barium	ppm	ASTM D5185(m)		0	0	<1
Molybdenum	ppm	ASTM D5185(m)		0	0	<1
Manganese	ppm	ASTM D5185(m)		<1	1	12
Magnesium	ppm	ASTM D5185(m)		1	<1	1
Calcium	ppm	ASTM D5185(m)		130	45	208
Phosphorus	ppm	ASTM D5185(m)		228	292	356
Zinc	ppm	ASTM D5185(m)		6	8	11
Sulfur	ppm	ASTM D5185(m)		976	416	965
Visc @ 40°C	cSt	ASTM D7279(m)	26.0	35.4	35.3	39.1
Visc @ 100°C	cSt	ASTM D7279(m)	5.5	6.6	7.1	7.3
Viscosity Index (VI)	Scale	ASTM D2270*	155	143	168	153

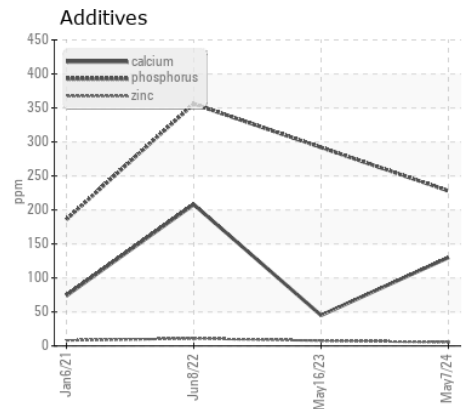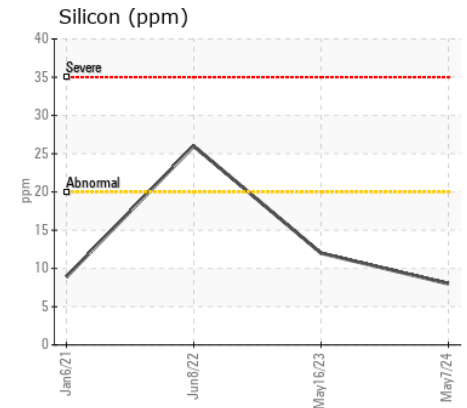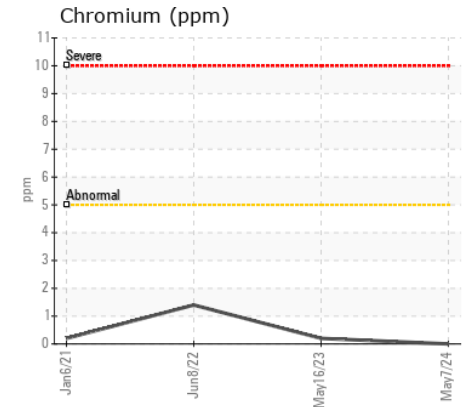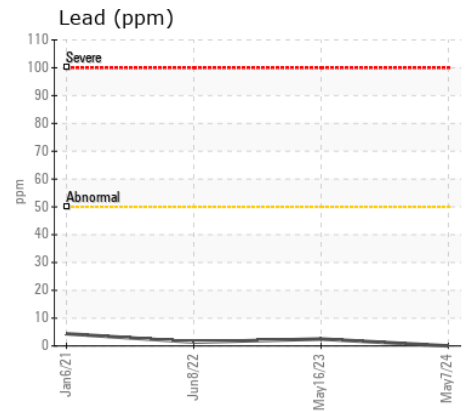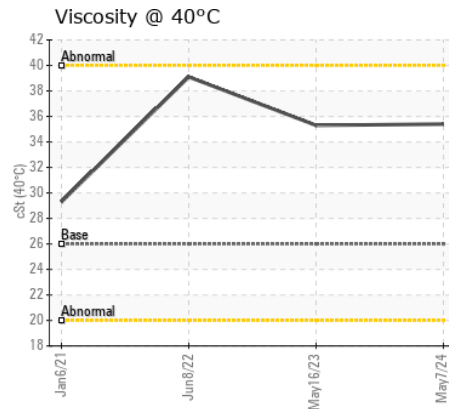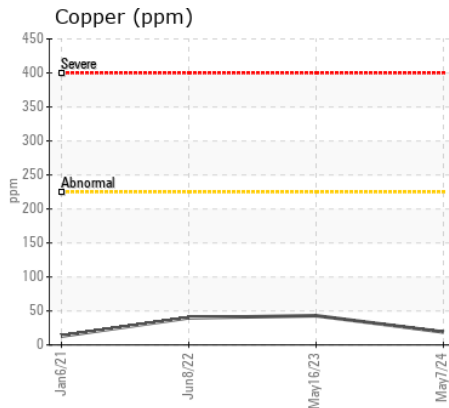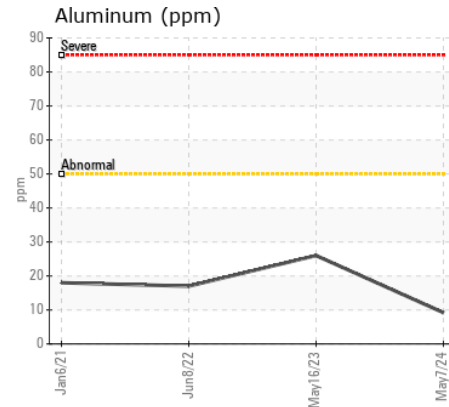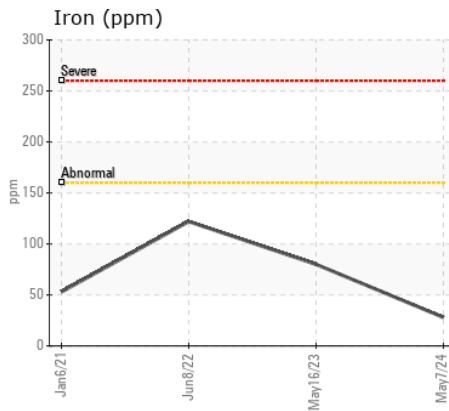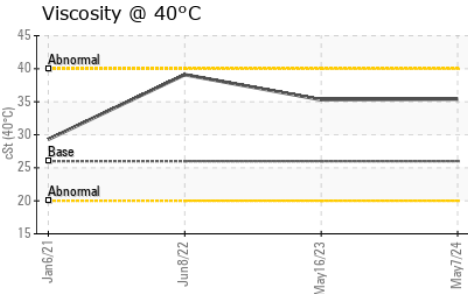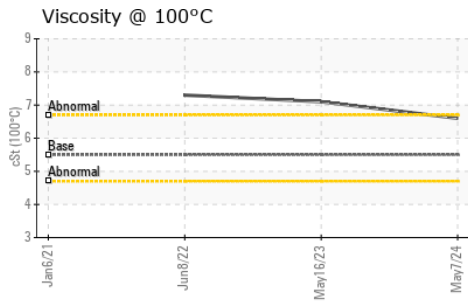

Laboratory : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9
Sample No. : PC0088241
Lab Number : **02634372**
Unique Number : 5775525
Test Package : MOB 1 (Additional Tests: KV100, VI)

GFL Environmental - 737 - Quebec City Hauling
 6205 Boul. Wilfrid Hamel,
 Quebec City, QC
 CA G2E 5G8
 Contact: Dave Beaulieu
 davebeaulieu@matrec.ca

To discuss this sample report, contact Customer Service at 1-800-268-2131.
 Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab.
 Validity of results and interpretation are based on the sample and information as supplied.

T:
F: