

Machine Id
OR357
Component
Transmission (Auto)
Fluid
TES SYN 295 (--- GAL)

RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		GFL0113338	---	---
Sample Date		Client Info		01 May 2024	---	---
Machine Age	hrs	Client Info		8306	---	---
Oil Age	hrs	Client Info		8306	---	---
Filter Age	hrs	Client Info		500	---	---
Oil Changed		Client Info		Oil Added	---	---
Filter Changed		Client Info		Changed	---	---
Sample Status				NORMAL	---	---

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185(m)	>160	52	---	---
Chromium	ppm	ASTM D5185(m)	>5	<1	---	---
Nickel	ppm	ASTM D5185(m)	>5	0	---	---
Titanium	ppm	ASTM D5185(m)		<1	---	---
Silver	ppm	ASTM D5185(m)	>5	0	---	---
Aluminum	ppm	ASTM D5185(m)	>50	21	---	---
Lead	ppm	ASTM D5185(m)	>50	0	---	---
Copper	ppm	ASTM D5185(m)	>225	24	---	---
Tin	ppm	ASTM D5185(m)	>10	0	---	---
Vanadium	ppm	ASTM D5185(m)		0	---	---
White Metal	scalar	Visual*	NONE	VLITE	---	---
Yellow Metal	scalar	Visual*	NONE	NONE	---	---

CONTAMINATION










There is no indication of any contamination in the fluid.

Silicon	ppm	ASTM D5185(m)	>20	15	---	---
Potassium	ppm	ASTM D5185(m)	>20	5	---	---
Water		WC Method	>0.1	NEG	---	---
Silt	scalar	Visual*	NONE	VLITE	---	---
Debris	scalar	Visual*	NONE	NONE	---	---
Sand/Dirt	scalar	Visual*	NONE	NONE	---	---
Appearance	scalar	Visual*	NORML	NORML	---	---
Odor	scalar	Visual*	NORML	NORML	---	---
Emulsified Water	scalar	Visual*	>0.1	NEG	---	---

FLUID CONDITION

The condition of the fluid is acceptable for the time in service.

Sodium	ppm	ASTM D5185(m)		8	---	---
Boron	ppm	ASTM D5185(m)	85	49	---	---
Barium	ppm	ASTM D5185(m)	0	<1	---	---
Molybdenum	ppm	ASTM D5185(m)	0	0	---	---
Manganese	ppm	ASTM D5185(m)	0	2	---	---
Magnesium	ppm	ASTM D5185(m)	1	4	---	---
Calcium	ppm	ASTM D5185(m)	100	57	---	---
Phosphorus	ppm	ASTM D5185(m)	200	177	---	---
Zinc	ppm	ASTM D5185(m)	0	52	---	---
Sulfur	ppm	ASTM D5185(m)	1500	924	---	---
Visc @ 40°C	cSt	ASTM D7279(m)	37.0	23.9	---	---

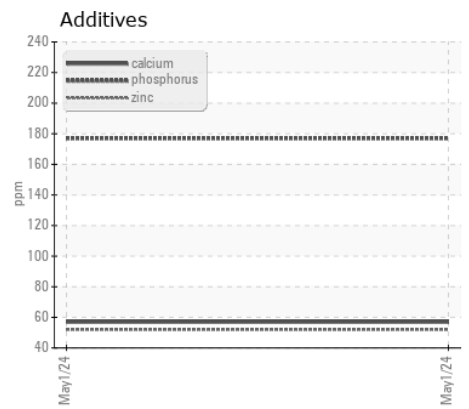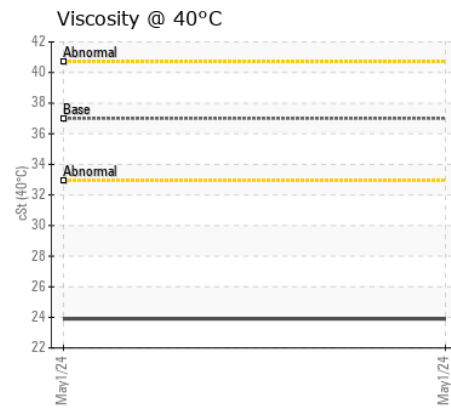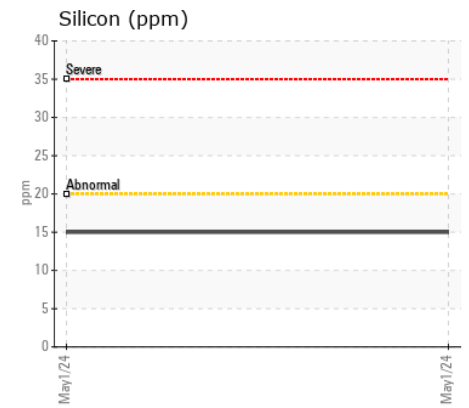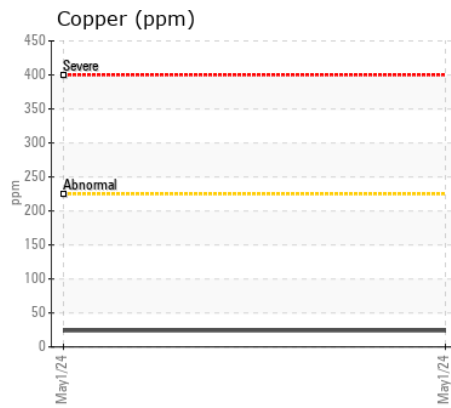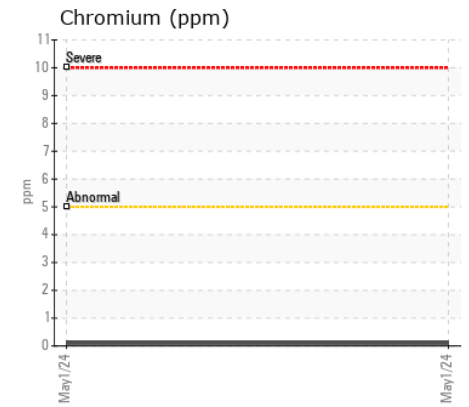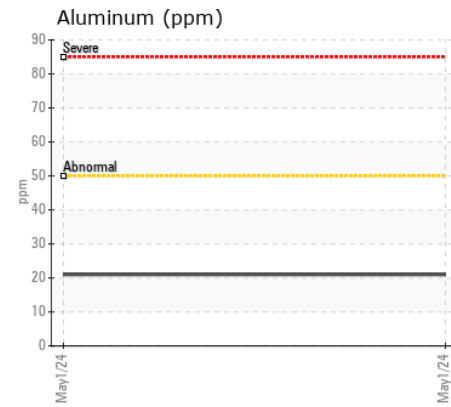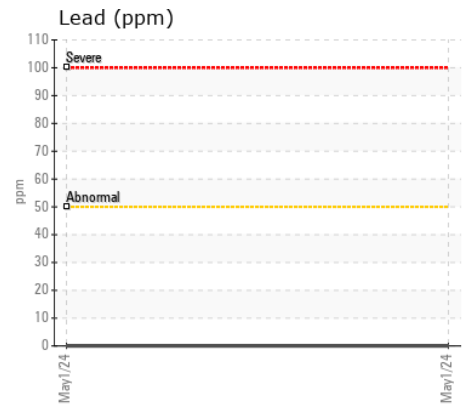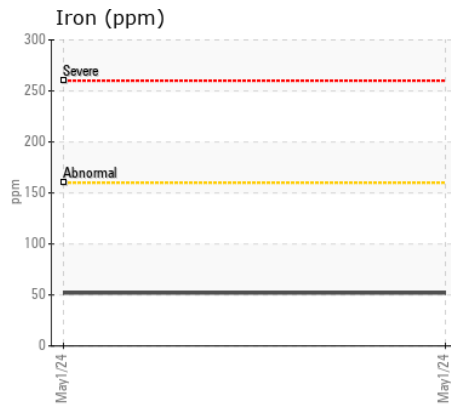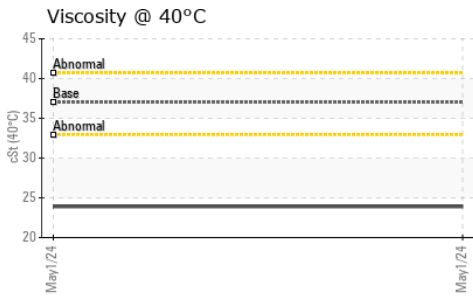

Laboratory : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9
Sample No. : GFL0113338
Lab Number : 02634380
Unique Number : 5775533
Test Package : MOB 1
Received : 09 May 2024
Tested : 09 May 2024
Diagnosed : 10 May 2024 - Kevin Marson

GFL Environmental - 720 - Lafleche - Landfill
 17125 Lafleche Road,
 Moose Creek, ON
 CA K0C 1W0
 Contact: Charles Bergeron
 cbergeron@gflenv.com
 T: (613)538-4853
 F:

To discuss this sample report, contact Customer Service at 1-800-268-2131.
 Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab.
 Validity of results and interpretation are based on the sample and information as supplied.