



OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Machine Id
DOOSAN DX85R-3
 Component
Left Differential
 Fluid
DOOSAN 80W90 (--- GAL)

RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		WC0851962	---	---
Sample Date		Client Info		06 May 2024	---	---
Machine Age	hrs	Client Info		630	---	---
Oil Age	hrs	Client Info		130	---	---
Filter Age	hrs	Client Info		130	---	---
Oil Changed		Client Info		Not Changd	---	---
Filter Changed		Client Info		Not Changd	---	---
Sample Status				NORMAL	---	---

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185(m)	>500	405	---	---
Chromium	ppm	ASTM D5185(m)	>10	8	---	---
Nickel	ppm	ASTM D5185(m)	>10	4	---	---
Titanium	ppm	ASTM D5185(m)		2	---	---
Silver	ppm	ASTM D5185(m)		0	---	---
Aluminum	ppm	ASTM D5185(m)	>25	22	---	---
Lead	ppm	ASTM D5185(m)	>25	0	---	---
Copper	ppm	ASTM D5185(m)	>100	1	---	---
Tin	ppm	ASTM D5185(m)	>10	0	---	---
Vanadium	ppm	ASTM D5185(m)		0	---	---
White Metal	scalar	Visual*	NONE	VLITE	---	---
Yellow Metal	scalar	Visual*	NONE	NONE	---	---

CONTAMINATION











There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185(m)	>75	105	---	---
Potassium	ppm	ASTM D5185(m)	>20	18	---	---
Water		WC Method	>.2	NEG	---	---
Silt	scalar	Visual*	NONE	NONE	---	---
Debris	scalar	Visual*	NONE	VLITE	---	---
Sand/Dirt	scalar	Visual*	NONE	NONE	---	---
Appearance	scalar	Visual*	NORML	NORML	---	---
Odor	scalar	Visual*	NORML	NORML	---	---
Emulsified Water	scalar	Visual*	>.2	NEG	---	---

FLUID CONDITION

The condition of the oil is acceptable for the time in service.

Sodium	ppm	ASTM D5185(m)		8	---	---
Boron	ppm	ASTM D5185(m)		40	---	---
Barium	ppm	ASTM D5185(m)		42	---	---
Molybdenum	ppm	ASTM D5185(m)		0	---	---
Manganese	ppm	ASTM D5185(m)		13	---	---
Magnesium	ppm	ASTM D5185(m)		23	---	---
Calcium	ppm	ASTM D5185(m)		71	---	---
Phosphorus	ppm	ASTM D5185(m)		922	---	---
Zinc	ppm	ASTM D5185(m)		78	---	---
Sulfur	ppm	ASTM D5185(m)		15703	---	---
Visc @ 40°C	cSt	ASTM D7279(m)		170	---	---

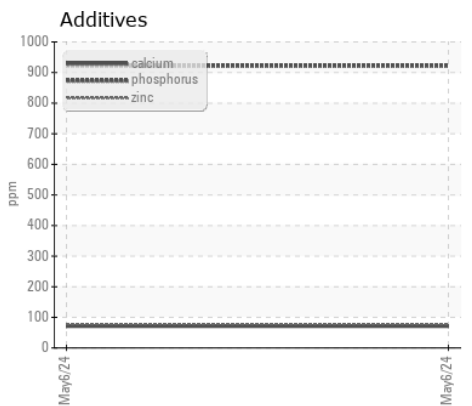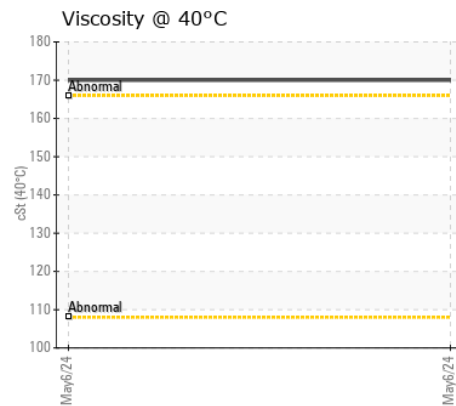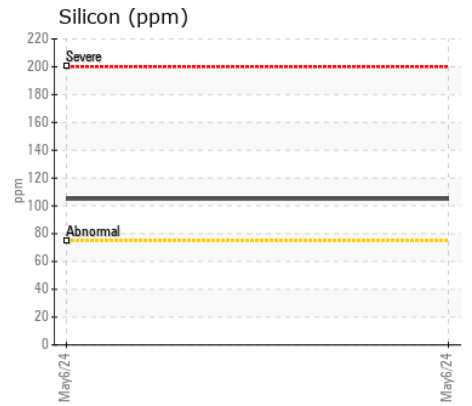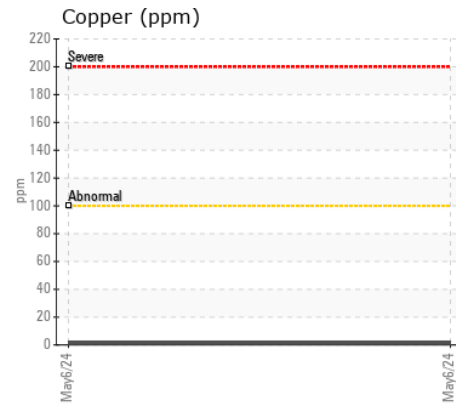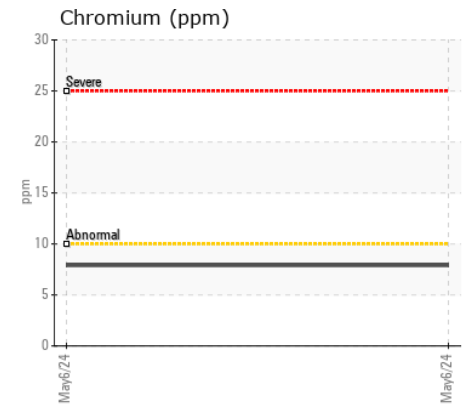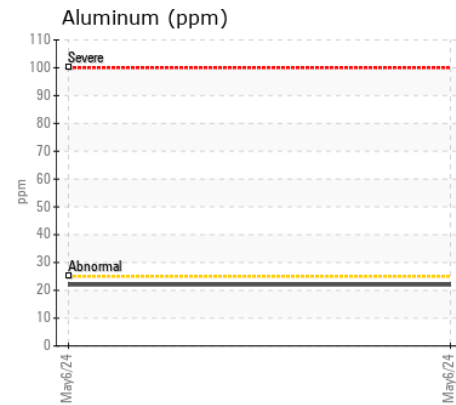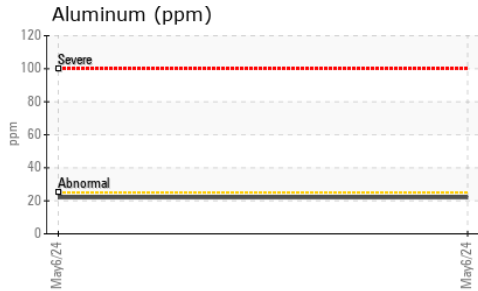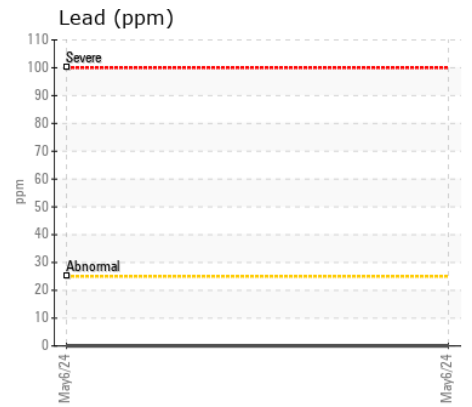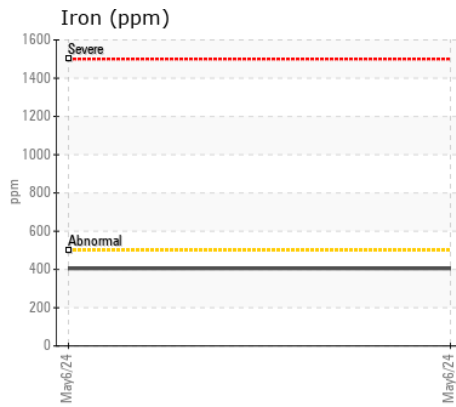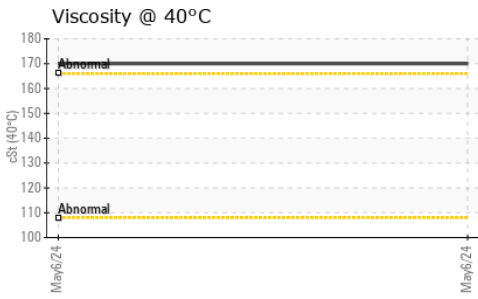

Laboratory : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9
Sample No. : WC0851962
Lab Number : 02634382
Unique Number : 5775535
Test Package : MOB 1
Received : 09 May 2024
Tested : 09 May 2024
Diagnosed : 10 May 2024 - Kevin Marson

C.G. EQUIPMENT
 7367 Wellington Rd. 30, Unit A
 Guelph, ON
 CA N0M 2T0
 Contact: CG Equipment CG Guelph
 cory@cgequipment.com
 T: (519)826-0550
 F: (519)837-2055

To discuss this sample report, contact Customer Service at 1-800-268-2131.
 Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab.
 Validity of results and interpretation are based on the sample and information as supplied.