



OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Machine Id
1367
 Component
Rear Diesel Engine
 Fluid
PETRO CANADA DURON HP 15W40 (--- GAL)

RECOMMENDATION

Resample at the next service interval to monitor. Please specify the component make and model with your next sample.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		WC0932505	WC0913053	WC0887378
Sample Date		Client Info		09 May 2024	13 Mar 2024	03 Jan 2024
Machine Age	hrs	Client Info		0	34489	33970
Oil Age	hrs	Client Info		0	520	595
Filter Age	hrs	Client Info		0	520	0
Oil Changed		Client Info		Changed	Changed	Changed
Filter Changed		Client Info		Changed	Changed	Changed
Sample Status				NORMAL	NORMAL	NORMAL

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185(m)	>100	18	16	15
Chromium	ppm	ASTM D5185(m)	>20	<1	<1	<1
Nickel	ppm	ASTM D5185(m)	>4	0	0	<1
Titanium	ppm	ASTM D5185(m)		0	0	0
Silver	ppm	ASTM D5185(m)	>3	0	0	0
Aluminum	ppm	ASTM D5185(m)	>20	2	<1	2
Lead	ppm	ASTM D5185(m)	>40	0	0	<1
Copper	ppm	ASTM D5185(m)	>330	1	<1	1
Tin	ppm	ASTM D5185(m)	>15	0	0	0
Vanadium	ppm	ASTM D5185(m)		0	0	0

CONTAMINATION











There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185(m)	>25	2	2	3
Potassium	ppm	ASTM D5185(m)	>20	<1	0	0
Fuel		WC Method	>5	<1.0	<1.0	<1.0
Water		WC Method	>0.2	NEG	NEG	NEG
Glycol		WC Method		NEG	NEG	NEG
Soot %	%	ASTM D7844*	>3	1.8	1.7	1.9
Nitration	Abs/cm	ASTM D7624*	>20	9.2	9.1	9.8
Sulfation	Abs/.1mm	ASTM D7415*	>30	24.9	23.4	25.5
Emulsified Water	scalar	Visual*	>0.2	NEG	NEG	NEG

FLUID CONDITION

The condition of the oil is acceptable for the time in service.

Sodium	ppm	ASTM D5185(m)		2	1	1
Boron	ppm	ASTM D5185(m)	0	1	0	1
Barium	ppm	ASTM D5185(m)	0	0	0	0
Molybdenum	ppm	ASTM D5185(m)	60	58	58	57
Manganese	ppm	ASTM D5185(m)	0	<1	0	0
Magnesium	ppm	ASTM D5185(m)	1010	952	918	942
Calcium	ppm	ASTM D5185(m)	1070	1051	1138	1044
Phosphorus	ppm	ASTM D5185(m)	1150	969	993	983
Zinc	ppm	ASTM D5185(m)	1270	1178	1185	1155
Sulfur	ppm	ASTM D5185(m)	2060	2491	2634	2609
Oxidation	Abs/.1mm	ASTM D7414*	>25	20.2	17.4	21.6
Visc @ 100°C	cSt	ASTM D7279(m)	15.6	13.8	13.8	13.6

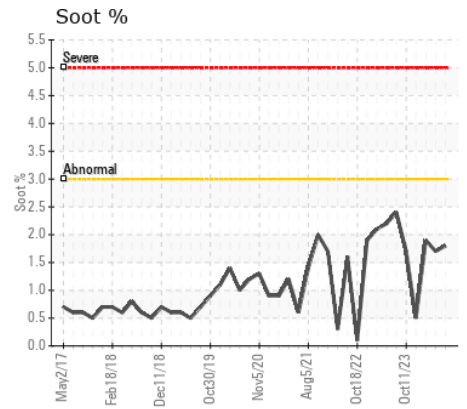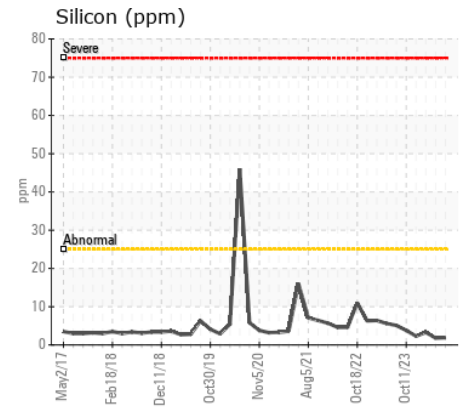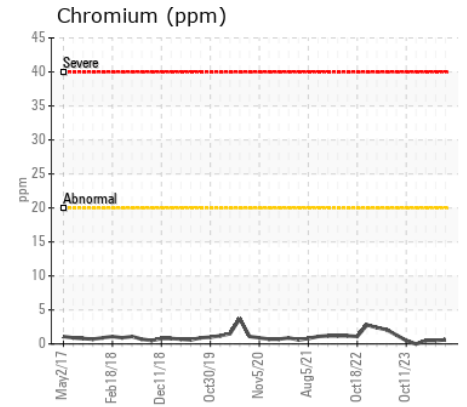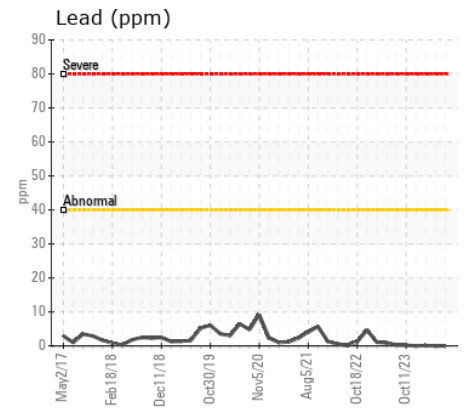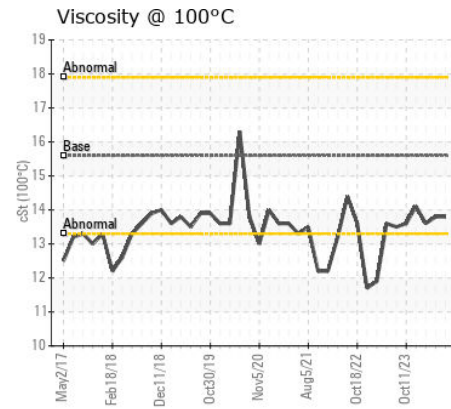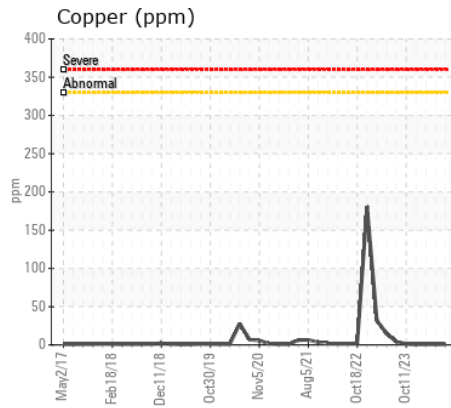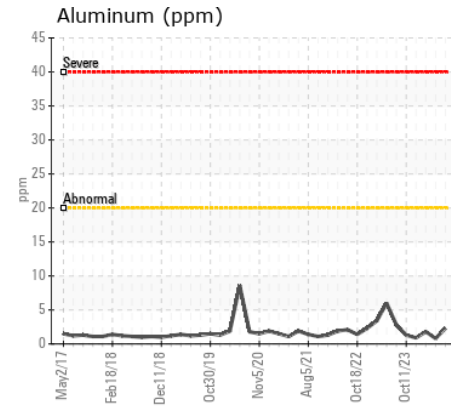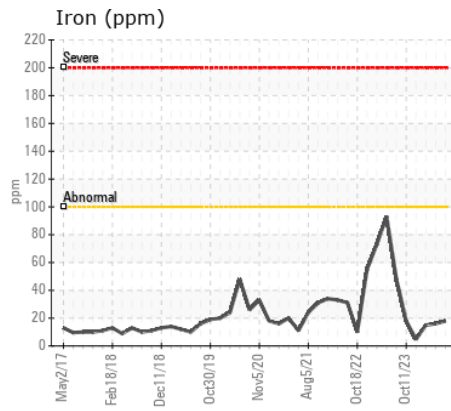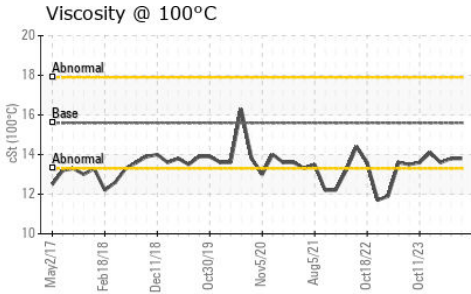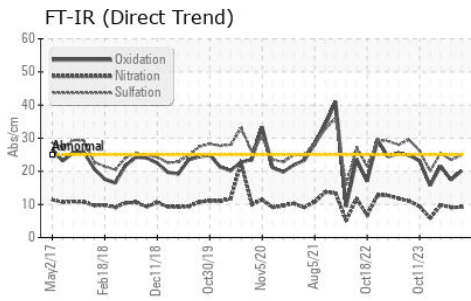

ISO 17025:2017
Accredited
Laboratory

Laboratory : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9
Sample No. : WC0932505
Lab Number : 02634480
Unique Number : 5775633
Test Package : MOB 1

Received : 10 May 2024
Tested : 10 May 2024
Diagnosed : 10 May 2024 - Wes Davis

KINGSTON TRANSIT
 1181 JOHN COUNTER BLVD
 KINGSTON, ON
 CA K7K 6C7
 Contact: Brent Gunter
 bgunter@cityofkingston.ca
 T: (613)546-4291
 F: (613)542-1504

To discuss this sample report, contact Customer Service at 1-800-268-2131.
 Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab.
 Validity of results and interpretation are based on the sample and information as supplied.