



LIEBHERR

OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL



Area
(361220)
Machine Id
LIEBHERR LH50M 134706-1216
Component
Diesel Engine
Fluid
PETRO CANADA SUPREME 5W30 (--- GAL)

RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		LH	LH	LH
Sample Date		Client Info		07 May 2024	15 Feb 2024	17 Sep 2023
Machine Age	hrs	Client Info		0	5100	0
Oil Age	hrs	Client Info		0	0	0
Filter Age	hrs	Client Info		0	0	0
Oil Changed		Client Info		Not Changed	Changed	N/A
Filter Changed		Client Info		Not Changed	Changed	N/A
Sample Status				NORMAL	NORMAL	NORMAL

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185(m)	>66	4	7	6
Chromium	ppm	ASTM D5185(m)	>4	0	<1	<1
Nickel	ppm	ASTM D5185(m)	>4	0	<1	<1
Titanium	ppm	ASTM D5185(m)		0	0	0
Silver	ppm	ASTM D5185(m)	>3	0	0	0
Aluminum	ppm	ASTM D5185(m)	>8	1	2	1
Lead	ppm	ASTM D5185(m)	>10	0	<1	<1
Copper	ppm	ASTM D5185(m)	>74	2	3	4
Tin	ppm	ASTM D5185(m)	>4	0	<1	<1
Vanadium	ppm	ASTM D5185(m)		0	0	0

CONTAMINATION











There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185(m)	>15	5	7	6
Potassium	ppm	ASTM D5185(m)	>20	<1	<1	<1
Fuel		WC Method	>5	<1.0	<1.0	<1.0
Water		WC Method	>0.2	NEG	NEG	NEG
Glycol		WC Method		NEG	NEG	NEG
Soot %	%	ASTM D7844*	>3	0	0	0
Nitration	Abs/cm	ASTM D7624*	>20	10.6	10.7	10.1
Sulfation	Abs/.1mm	ASTM D7415*	>30	21.8	23.1	22.6
Emulsified Water	scalar	Visual*	>0.2	NEG	NEG	NEG

FLUID CONDITION

The condition of the oil is acceptable for the time in service.

Sodium	ppm	ASTM D5185(m)		4	2	2
Boron	ppm	ASTM D5185(m)	186	29	<1	1
Barium	ppm	ASTM D5185(m)	<1	0	0	<1
Molybdenum	ppm	ASTM D5185(m)	79	60	60	59
Manganese	ppm	ASTM D5185(m)	0	0	0	<1
Magnesium	ppm	ASTM D5185(m)	578	1092	979	993
Calcium	ppm	ASTM D5185(m)	1002	860	1099	1041
Phosphorus	ppm	ASTM D5185(m)	745	993	1011	1049
Zinc	ppm	ASTM D5185(m)	837	1208	1207	1210
Sulfur	ppm	ASTM D5185(m)	2502	2676	2620	2449
Oxidation	Abs/.1mm	ASTM D7414*	>25	22.6	23.9	22.7
Visc @ 100°C	cSt	ASTM D7279(m)	11.42	11.9	13.3	12.8

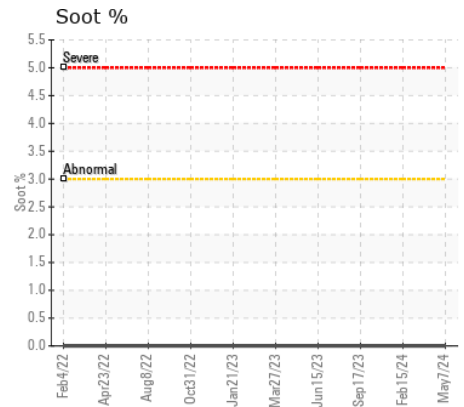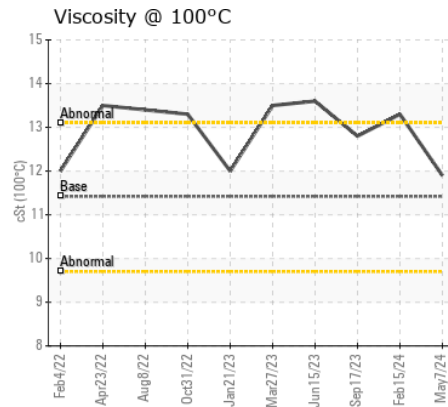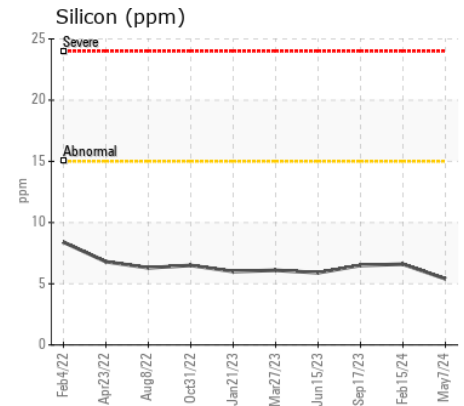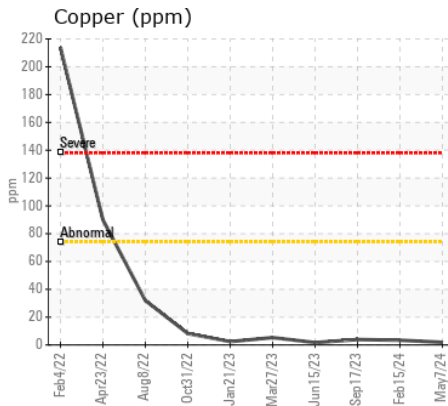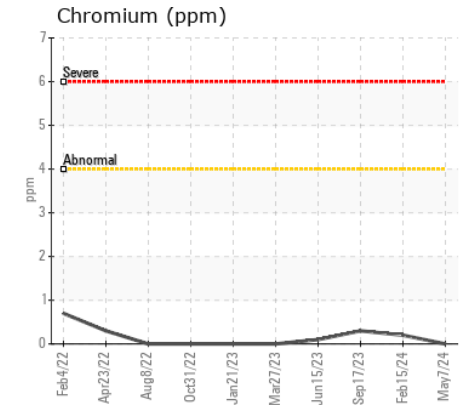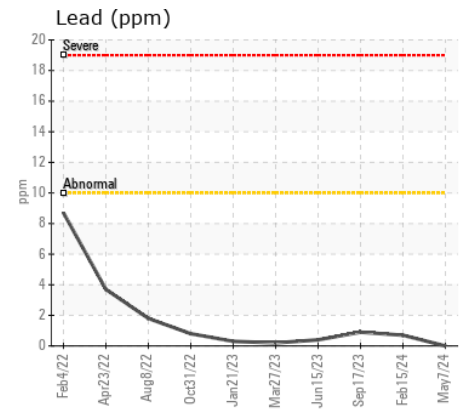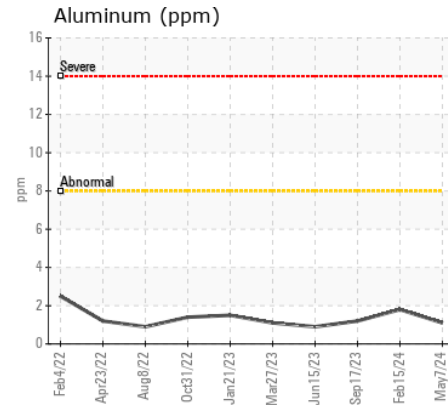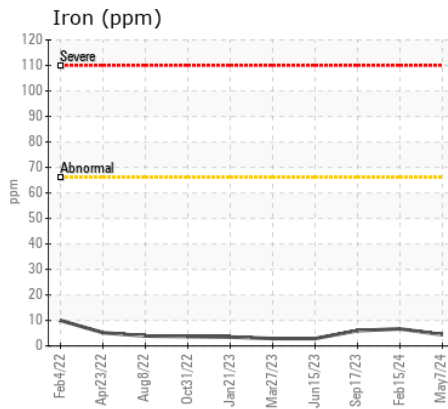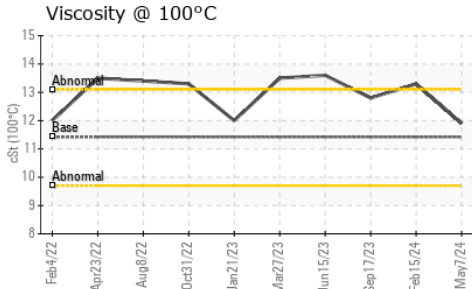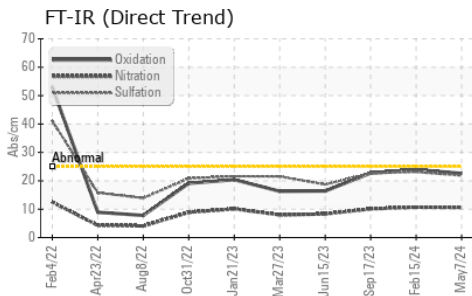

Laboratory : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9
Sample No. : LH
Lab Number : 02634490
Unique Number : 5775643
Test Package : MOB 1
Received : 10 May 2024
Tested : 10 May 2024
Diagnosed : 10 May 2024 - Wes Davis

Industrial Metals
 550 Messier St.
 Winnipeg, MB
 CA R2J 0G5
 Contact: Service Manager

To discuss this sample report, contact Customer Service at 1-800-268-2131.
 Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab.
 Validity of results and interpretation are based on the sample and information as supplied.

T:
F: