



OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Area

(C-FCEW)

Machine Id

[C-FCEW] CIRRUS SR22 C-FFCE

Component

Front Piston Aircraft Engine

Fluid

SHELL AEROSHELL W 15W50 MGR (8 QTS)

RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		WC0931367	WC0841038	WC0750044
Sample Date		Client Info		07 May 2024	14 Nov 2023	17 Jul 2023
TSN	hrs	Client Info		498	483	447
TSO	hrs	Client Info		498	483	0
Oil Age	hrs	Client Info		17	0	32
Filter Age	hrs	Client Info		17	0	32
Oil Changed		Client Info		Changed	Changed	N/A
Filter Changed		Client Info		Changed	Changed	N/A
Sample Status				NORMAL	ABNORMAL	NORMAL

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185(m)	>90	35	68	56
Chromium	ppm	ASTM D5185(m)	>20	7	11	9
Nickel	ppm	ASTM D5185(m)	>15	9	2	9
Titanium	ppm	ASTM D5185(m)		<1	0	<1
Silver	ppm	ASTM D5185(m)	>5	0	<1	0
Aluminum	ppm	ASTM D5185(m)	>25	11	9	13
Lead	ppm	ASTM D5185(m)	>20000	3456	791	5197
Copper	ppm	ASTM D5185(m)	>25	6	10	15
Tin	ppm	ASTM D5185(m)	>30	0	<1	2
Vanadium	ppm	ASTM D5185(m)		0	0	0
White Metal	scalar	Visual*	NONE	NONE	NONE	NONE
Yellow Metal	scalar	Visual*	NONE	NONE	NONE	NONE

CONTAMINATION





There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185(m)	>15	13	▲ 22	8
Potassium	ppm	ASTM D5185(m)	>20	<1	<1	<1
Fuel		WC Method	>4.0	<1.0	<1.0	<1.0
Water		WC Method	>0.1	NEG	NEG	NEG
Glycol		WC Method		NEG	NEG	NEG
Silt	scalar	Visual*	NONE	NONE	NONE	LIGHT
Debris	scalar	Visual*	NONE	VLITE	NONE	NONE
Sand/Dirt	scalar	Visual*	NONE	NONE	NONE	NONE
Appearance	scalar	Visual*	NORML	NORML	NORML	NORML
Odor	scalar	Visual*	NORML	NORML	NORML	NORML
Emulsified Water	scalar	Visual*	>0.1	NEG	NEG	NEG

FLUID CONDITION

The condition of the oil is acceptable for the time in service.

Sodium	ppm	ASTM D5185(m)		<1	<1	<1
Boron	ppm	ASTM D5185(m)		<1	<1	<1
Barium	ppm	ASTM D5185(m)		0	0	0
Molybdenum	ppm	ASTM D5185(m)	5	2	0	5
Manganese	ppm	ASTM D5185(m)		0	<1	0
Magnesium	ppm	ASTM D5185(m)	10	<1	<1	2
Calcium	ppm	ASTM D5185(m)	10	<1	<1	4
Phosphorus	ppm	ASTM D5185(m)	1280	161	2	1169
Zinc	ppm	ASTM D5185(m)	10	6	6	16
Sulfur	ppm	ASTM D5185(m)	1800	1003	808	1047
Visc @ 100°C	cSt	ASTM D7279(m)	18.2	18.3	18.7	18.1

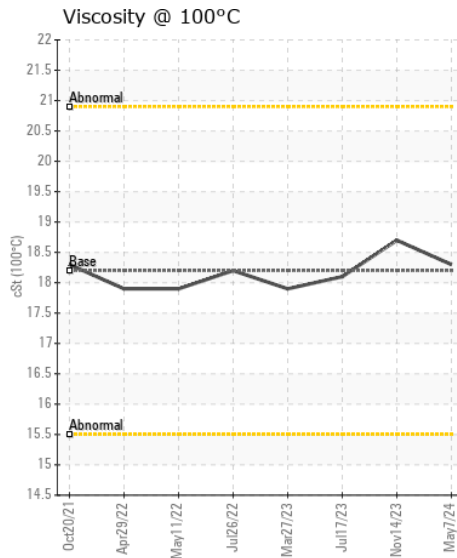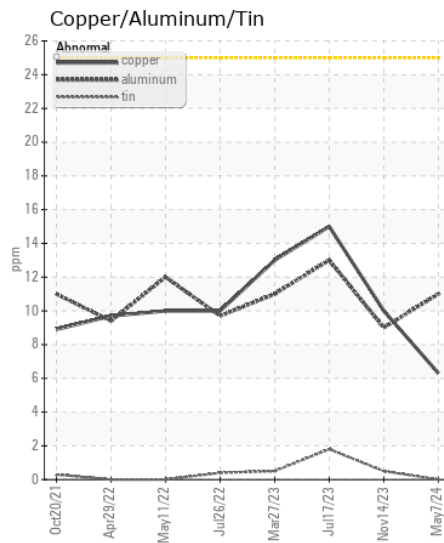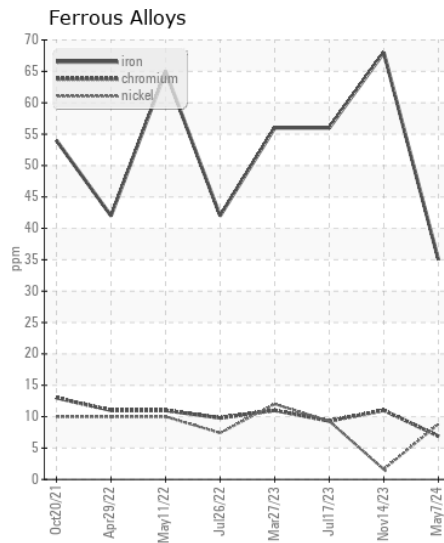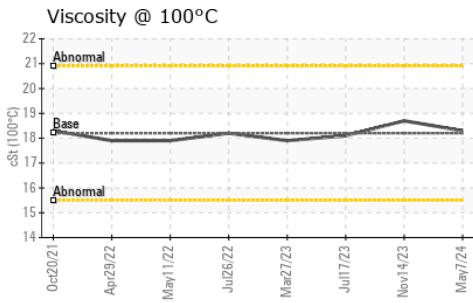

Laboratory : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9
Sample No. : WC0931367
Lab Number : 02634542
Unique Number : 5775695
Test Package : AVI 1
Received : 10 May 2024
Tested : 10 May 2024
Diagnosed : 10 May 2024 - Kevin Marson

HANDFIELD AVIATION
 4920 RTE DE L'AEROPORT
 ST-HUBERT, QC
 CA J3Y 8Y9
 Contact: Benoit Blaquiere
 service@handfieldaviation.com
 T: (450)676-6299
 F:

To discuss this sample report, contact Customer Service at 1-800-268-2131.
 Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab.
 Validity of results and interpretation are based on the sample and information as supplied.