



WEAR	NORMAL
CONTAMINATION	SEVERE
FLUID CONDITION	NORMAL



Machine Id
812052
Component
Hydraulic System
Fluid
PETRO CANADA HYDREX MV 32 (--- GAL)

RECOMMENDATION

Nous vous recommandons de vérifier tous les endroits par lesquels des contaminants peuvent pénétrer dans le système. Nous vous recommandons de remplacer le filtre et d'utiliser un système de filtrage hors-ligne afin d'améliorer la propreté du fluide. Le reniflard d'air doit être réparé. S'il n'est pas classé, nous vous recommandons de le remplacer par un reniflard à air adapté au micron et / ou au dessicant. Si évalué, nous vous recommandons de réparer / remplacer le reniflard. Échantillonner de nouveau dans 30 à 45 jours afin de contrôler la situation.

WEAR

Les taux d'usure de tous les composants sont normaux.








CONTAMINATION

Il y a une quantité élevée de matières particulaires (2 à 100 µm de taille) présente dans l'huile.

FLUID CONDITION

L'huile peut encore servir si la contamination peut être réduite à un niveau acceptable.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		GFL	GFL0027060	---
Sample Date		Client Info		08 May 2024	04 Jul 2022	---
Machine Age	kms	Client Info		90837	17423	---
Oil Age	kms	Client Info		0	0	---
Filter Age	kms	Client Info		0	0	---
Oil Changed		Client Info		N/A	Not Changd	---
Filter Changed		Client Info		N/A	Not Changd	---
Sample Status				SEVERE	ABNORMAL	---
Iron	ppm	ASTM D5185(m)	>40	7	2	---
Chromium	ppm	ASTM D5185(m)	>5	1	<1	---
Nickel	ppm	ASTM D5185(m)	>2	0	0	---
Titanium	ppm	ASTM D5185(m)	>2	0	0	---
Silver	ppm	ASTM D5185(m)		0	0	---
Aluminum	ppm	ASTM D5185(m)	>8	1	0	---
Lead	ppm	ASTM D5185(m)	>5	0	0	---
Copper	ppm	ASTM D5185(m)	>20	2	2	---
Tin	ppm	ASTM D5185(m)	>2	0	0	---
Vanadium	ppm	ASTM D5185(m)		0	0	---
White Metal	scalar	Visual*	NONE	NONE	NONE	---
Yellow Metal	scalar	Visual*	NONE	NONE	NONE	---
Silicon	ppm	ASTM D5185(m)	>20	2	<1	---
Potassium	ppm	ASTM D5185(m)	>20	5	1	---
Water		WC Method	>0.1	NEG	NEG	---
Particles >4µm		ASTM D7647	>5000	▲ 48915	▲ 11926	---
Particles >6µm		ASTM D7647	>1300	▲ 11699	▲ 3332	---
Particles >14µm		ASTM D7647	>160	▲ 652	● 245	---
Particles >21µm		ASTM D7647	>40	▲ 130	● 57	---
Particles >38µm		ASTM D7647	>10	5	5	---
Particles >71µm		ASTM D7647	>3	1	1	---
Oil Cleanliness		ISO 4406 (c)	>19/17/14	▲ 23/21/17	▲ 21/19/15	---
Silt	scalar	Visual*	NONE	NONE	NONE	---
Debris	scalar	Visual*	NONE	VLITE	VLITE	---
Sand/Dirt	scalar	Visual*	NONE	NONE	NONE	---
Appearance	scalar	Visual*	NORML	NORML	NORML	---
Odor	scalar	Visual*	NORML	NORML	NORML	---
Emulsified Water	scalar	Visual*	>0.1	NEG	NEG	---
Sodium	ppm	ASTM D5185(m)		5	1	---
Boron	ppm	ASTM D5185(m)	0	<1	0	---
Barium	ppm	ASTM D5185(m)	0	0	0	---
Molybdenum	ppm	ASTM D5185(m)	0	0	0	---
Manganese	ppm	ASTM D5185(m)	1	0	0	---
Magnesium	ppm	ASTM D5185(m)	0	2	<1	---
Calcium	ppm	ASTM D5185(m)	50	52	51	---
Phosphorus	ppm	ASTM D5185(m)	330	317	322	---
Zinc	ppm	ASTM D5185(m)	430	405	408	---
Sulfur	ppm	ASTM D5185(m)	760	768	765	---
Visc @ 40°C	cSt	ASTM D7279(m)	31.9	31.0	34.9	---

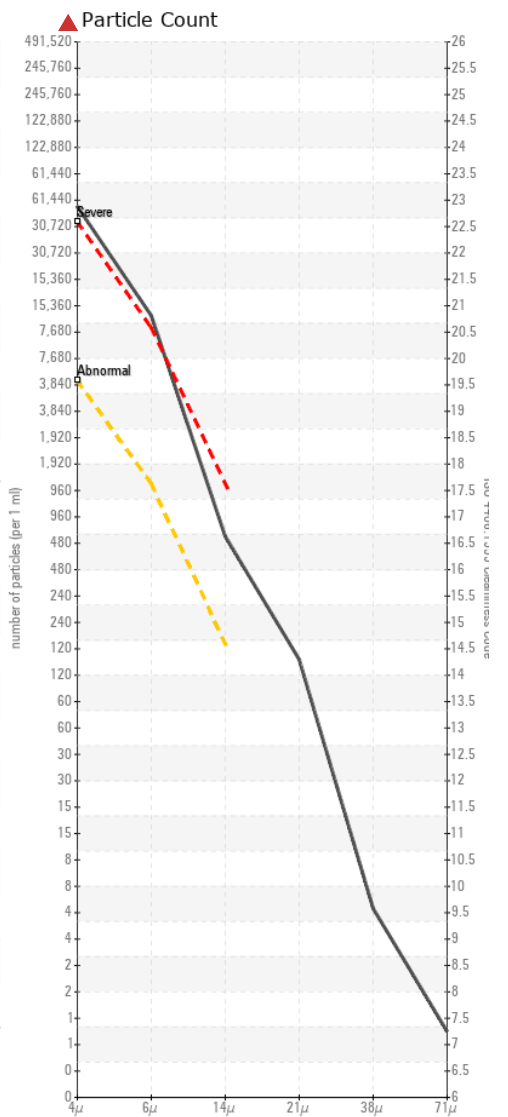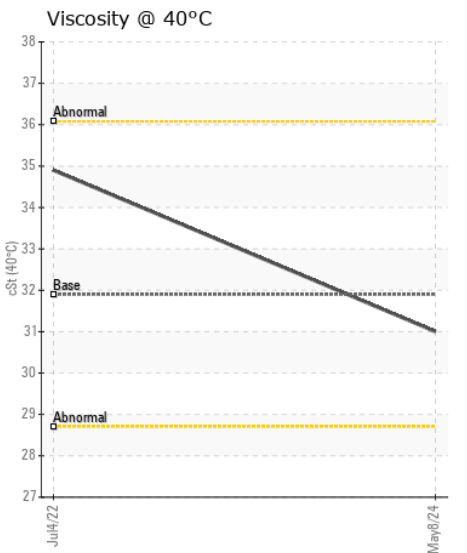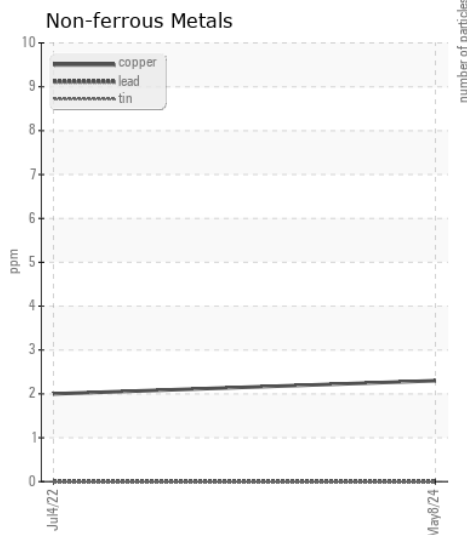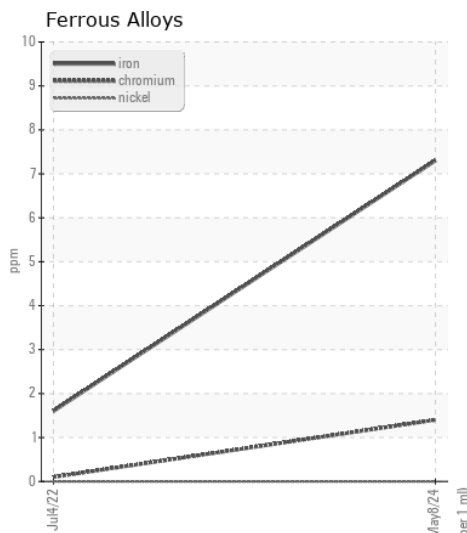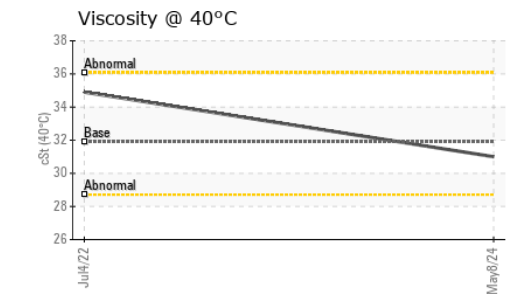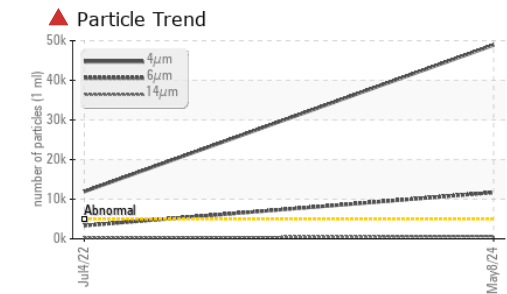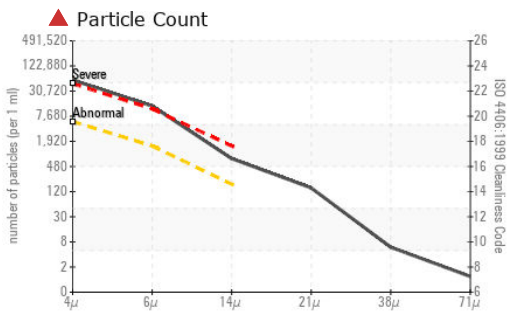

ISO 17025:2017
Accredited
Laboratory

Laboratory : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9
Sample No. : GFL
Lab Number : 02634650
Unique Number : 5775803
Test Package : MOB 1 (Additional Tests: PrtCount)

GFL Environmental - 731 - Granby - Hauling - Solid Waste
 140 Martin Street,
 Granby, QC
 CA J2G 8B4
 Contact: Simon Lambert
 slambert@matrec.ca
 T: (450)641-3070
 F:

To discuss this sample report, contact Customer Service at 1-800-268-2131.
 Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab.
 Validity of results and interpretation are based on the sample and information as supplied.