



VOLVO

OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL



Area
[403446]

Machine Id
16-8001

Component
Transmission (Auto)

Fluid
VOLVO AUTOMATIC TRANSMISSION FLUID AT102 (--- GAL)

RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		VCP394071	VCP380112	VCP381753
Sample Date		Client Info		07 May 2024	24 Nov 2023	14 Apr 2023
Machine Age	hrs	Client Info		26532	26059	24275
Oil Age	hrs	Client Info		500	0	2000
Filter Age	hrs	Client Info		0	0	0
Oil Changed		Client Info		Not Chngd	Not Chngd	Changed
Filter Changed		Client Info		Not Chngd	Not Chngd	Changed
Sample Status				NORMAL	NORMAL	NORMAL

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185(m)	>160	48	35	31
Chromium	ppm	ASTM D5185(m)	>5	0	0	0
Nickel	ppm	ASTM D5185(m)	>5	0	<1	<1
Titanium	ppm	ASTM D5185(m)		0	0	0
Silver	ppm	ASTM D5185(m)	>5	0	<1	0
Aluminum	ppm	ASTM D5185(m)	>50	2	2	1
Lead	ppm	ASTM D5185(m)	>50	0	<1	<1
Copper	ppm	ASTM D5185(m)	>225	6	5	6
Tin	ppm	ASTM D5185(m)	>10	0	0	<1
Vanadium	ppm	ASTM D5185(m)		0	0	0
White Metal	scalar	Visual*	NONE	NONE	NONE	NONE
Yellow Metal	scalar	Visual*	NONE	NONE	NONE	NONE

CONTAMINATION










There is no indication of any contamination in the fluid.

Silicon	ppm	ASTM D5185(m)	>20	5	6	10
Potassium	ppm	ASTM D5185(m)	>20	6	4	13
Water		WC Method	>0.1	NEG	NEG	NEG
Silt	scalar	Visual*	NONE	NONE	NONE	NONE
Debris	scalar	Visual*	NONE	NONE	VLITE	NONE
Sand/Dirt	scalar	Visual*	NONE	NONE	NONE	NONE
Appearance	scalar	Visual*	NORML	NORML	NORML	NORML
Odor	scalar	Visual*	NORML	NORML	NORML	NORML
Emulsified Water	scalar	Visual*	>0.1	NEG	NEG	NEG

FLUID CONDITION

The condition of the fluid is acceptable for the time in service.

Sodium	ppm	ASTM D5185(m)		6	4	8
Boron	ppm	ASTM D5185(m)	187	62	71	66
Barium	ppm	ASTM D5185(m)	0.0	<1	<1	2
Molybdenum	ppm	ASTM D5185(m)	0.0	0	0	0
Manganese	ppm	ASTM D5185(m)	0.0	2	<1	4
Magnesium	ppm	ASTM D5185(m)	6.8	2	2	0
Calcium	ppm	ASTM D5185(m)	215	75	76	72
Phosphorus	ppm	ASTM D5185(m)	445	188	198	203
Zinc	ppm	ASTM D5185(m)	56	46	28	10
Sulfur	ppm	ASTM D5185(m)	1336	1495	1551	1676
Visc @ 40°C	cSt	ASTM D7279(m)	35.3	28.4	28.2	28.6

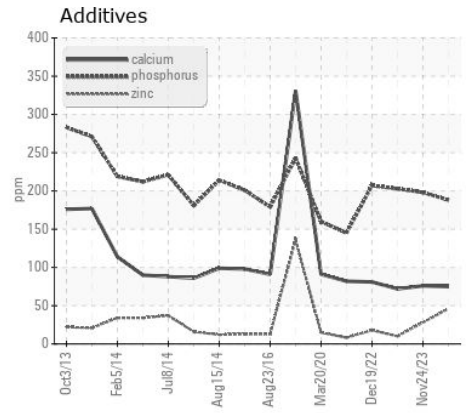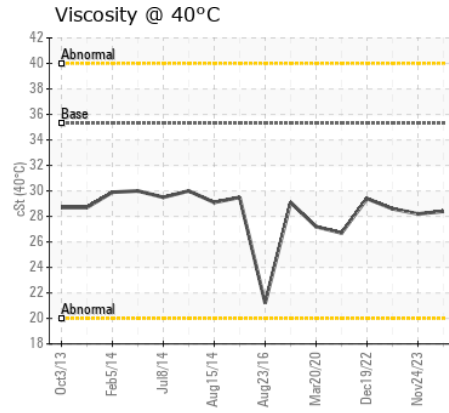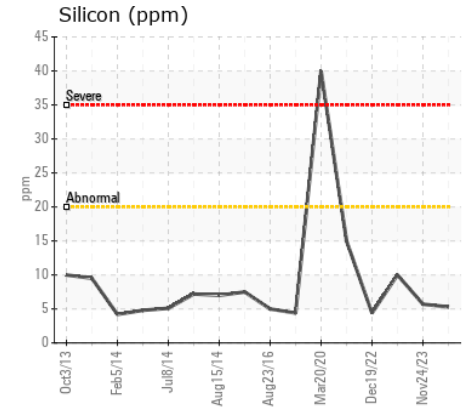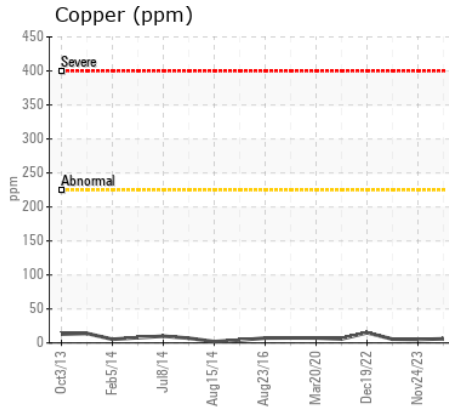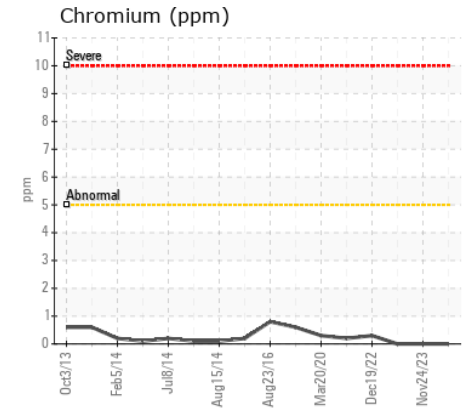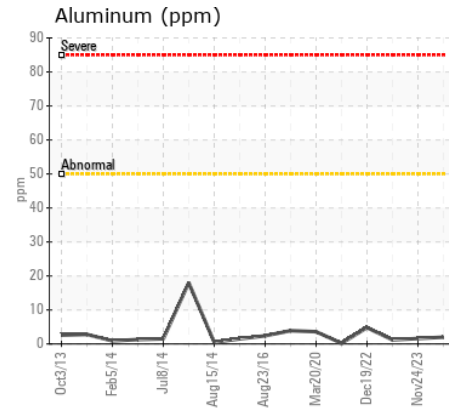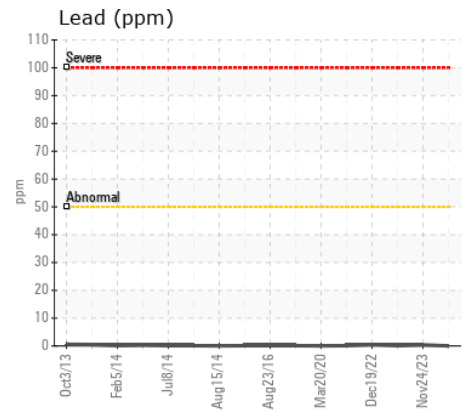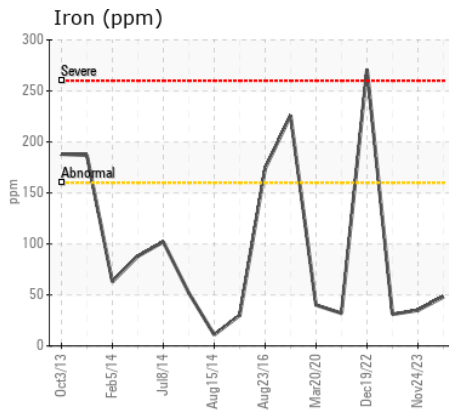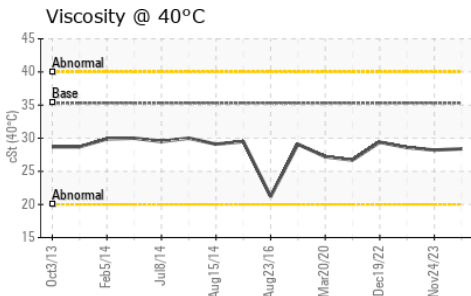

Laboratory : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9
Sample No. : VCP394071 **Received** : 10 May 2024
Lab Number : 02634726 **Tested** : 10 May 2024
Unique Number : 5775879 **Diagnosed** : 10 May 2024 - Wes Davis
Test Package : MOB 1

CRH CANADA GROUP INC.
 P.O. BOX 5400
 CONCORD, ON
 CA L4K 1B6
 Contact: Dan Brown
 dan.brown@ca.crh.com

To discuss this sample report, contact Customer Service at 1-800-268-2131.
 Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab.
 Validity of results and interpretation are based on the sample and information as supplied.

T:
F: