



Machine Id
401208
Component
Diesel Engine
Fluid
PETRO CANADA DURON SHP 15W40 (--- LTR)

RECOMMENDATION

Confirm the source of the lubricant being utilized for top-up/fill. Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		GFL0111990	GFL0054338	GFL0042408
Sample Date		Client Info		09 May 2024	19 Dec 2022	28 Jan 2022
Machine Age	kms	Client Info		322150	188445	112780
Oil Age	kms	Client Info		0	0	0
Filter Age	kms	Client Info		0	0	0
Oil Changed		Client Info		Changed	Changed	Changed
Filter Changed		Client Info		N/A	N/A	Changed
Sample Status				ABNORMAL	NORMAL	NORMAL

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185(m)	>120	5	29	11
Chromium	ppm	ASTM D5185(m)	>20	0	<1	<1
Nickel	ppm	ASTM D5185(m)	>15	0	<1	<1
Titanium	ppm	ASTM D5185(m)	>2	0	<1	0
Silver	ppm	ASTM D5185(m)	>3	0	<1	0
Aluminum	ppm	ASTM D5185(m)	>20	1	4	<1
Lead	ppm	ASTM D5185(m)	>40	0	2	<1
Copper	ppm	ASTM D5185(m)	>330	2	4	2
Tin	ppm	ASTM D5185(m)	>15	0	1	<1
Vanadium	ppm	ASTM D5185(m)		0	0	0

CONTAMINATION













Tests indicate that there is no fuel present in the oil. There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185(m)	>25	2	4	2
Potassium	ppm	ASTM D5185(m)	>20	<1	8	2
Fuel	%	ASTM D7593*	>3.0	0.0	1.2	<1.0
Water		WC Method	>0.2	NEG	NEG	NEG
Glycol		WC Method		NEG	NEG	NEG
Soot %	%	ASTM D7844*	>4	0.2	0.7	0
Nitration	Abs/cm	ASTM D7624*	>20	7.6	12.3	3.9
Sulfation	Abs/.1mm	ASTM D7415*	>30	22.7	25.1	12.9
Emulsified Water	scalar	Visual*	>0.2	NEG	NEG	NEG

FLUID CONDITION

Viscosity of sample indicates oil is within SAE 30 range, advise investigate. This plus the additive levels indicates that this is not the same brand, or type of oil as reported. The condition of the oil is acceptable for the time in service.

Sodium	ppm	ASTM D5185(m)		2	3	2
Boron	ppm	ASTM D5185(m)	0	38	13	2
Barium	ppm	ASTM D5185(m)	0	0	0	0
Molybdenum	ppm	ASTM D5185(m)	60	41	47	58
Manganese	ppm	ASTM D5185(m)	0	<1	<1	<1
Magnesium	ppm	ASTM D5185(m)	1010	509	530	1004
Calcium	ppm	ASTM D5185(m)	1070	1624	1701	1023
Phosphorus	ppm	ASTM D5185(m)	1150	729	748	1039
Zinc	ppm	ASTM D5185(m)	1270	860	880	1209
Sulfur	ppm	ASTM D5185(m)	2060	2027	1929	2533
Oxidation	Abs/.1mm	ASTM D7414*	>25	20.0	23.7	6.6
Visc @ 100°C	cSt	ASTM D7279(m)	15.4	▲ 11.4	11.9	13.4

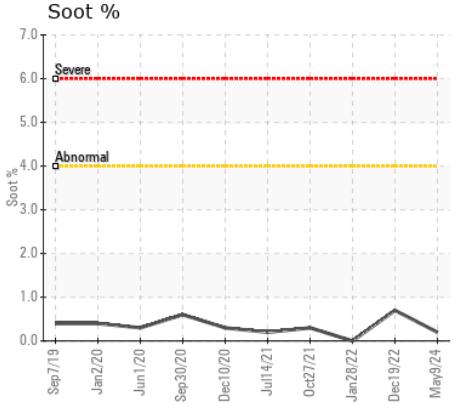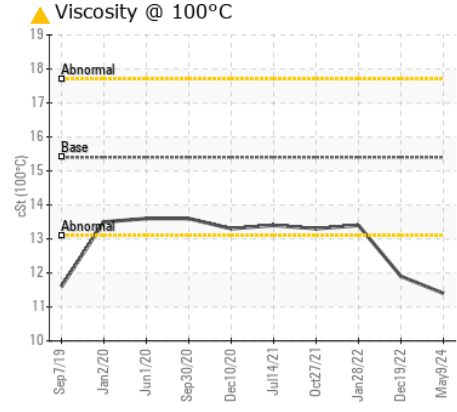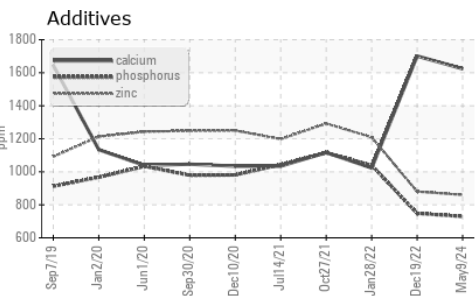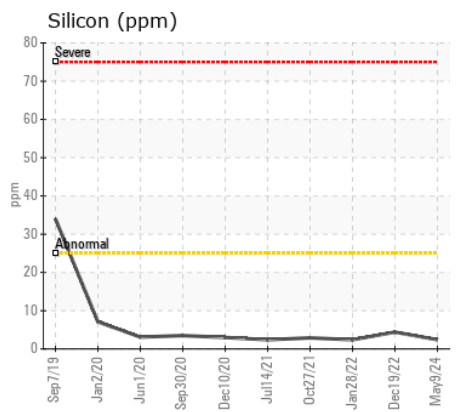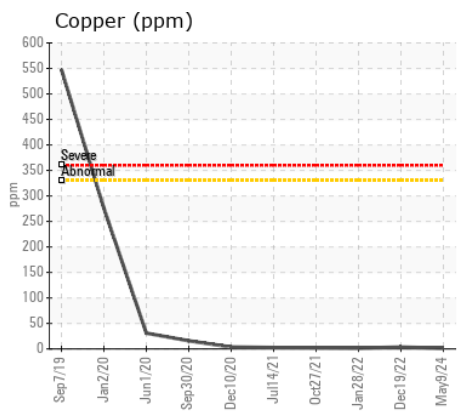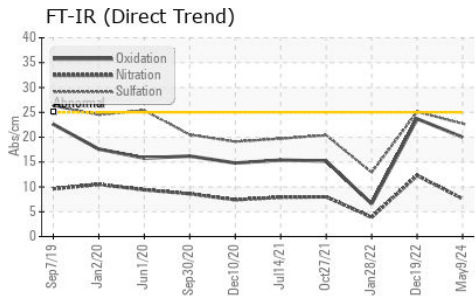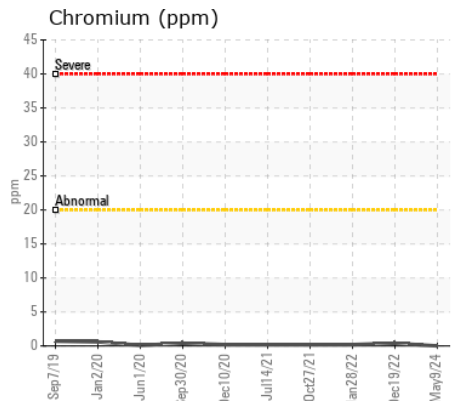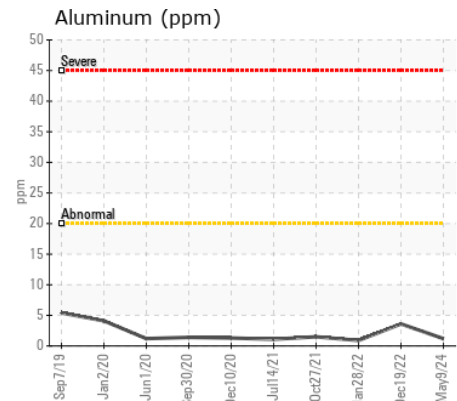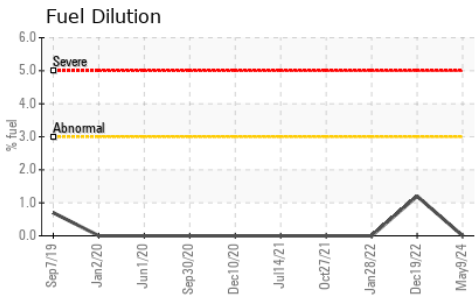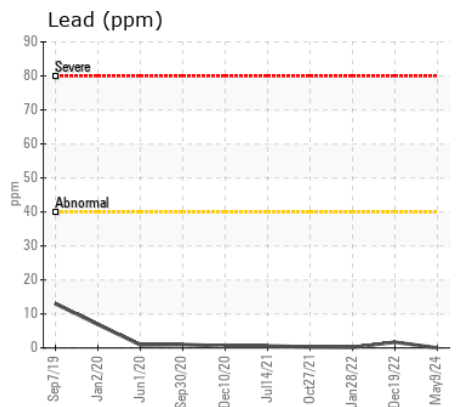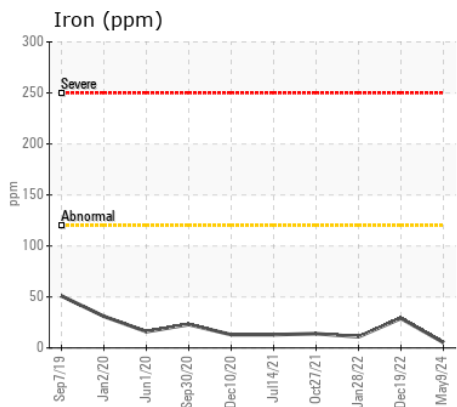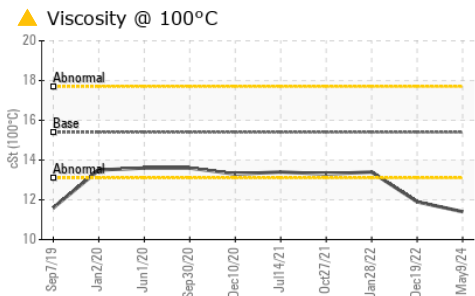

Laboratory : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9
Sample No. : GFL0111990 **Received** : 13 May 2024
Lab Number : 02634885 **Tested** : 14 May 2024
Unique Number : 5776038 **Diagnosed** : 14 May 2024 - Kevin Marson
Test Package : MOB 1 (Additional Tests: FuelDilution, PercentFuel)

GFL Environmental - 216M
 2475 Beryl Drive
 Oakville, ON
 CA L6J 7X4
 Contact: Matthew Guinness
 mgunness@gflenv.com

To discuss this sample report, contact Customer Service at 1-800-268-2131.
 Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab.
 Validity of results and interpretation are based on the sample and information as supplied.