



# LIEBHERR

## OIL ANALYSIS REPORT

WEAR	<b>NORMAL</b>
CONTAMINATION	<b>NORMAL</b>
FLUID CONDITION	<b>NORMAL</b>



Machine Id  
**045705-1491**

Component  
**Splitter Box**

Fluid  
**PETRO CANADA TRAXON 75W90 SYNTHETIC (--- GAL)**

### RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		<b>LH0281288</b>	LH0281317	LH0265687
Sample Date		Client Info		<b>07 May 2024</b>	14 Dec 2023	01 Aug 2023
Machine Age	hrs	Client Info		<b>5888</b>	5435	4919
Oil Age	hrs	Client Info		<b>0</b>	0	0
Filter Age	hrs	Client Info		<b>0</b>	0	0
Oil Changed		Client Info		<b>Changed</b>	Changed	N/A
Filter Changed		Client Info		<b>N/A</b>	N/A	N/A
Sample Status				<b>NORMAL</b>	SEVERE	SEVERE

### WEAR

All component wear rates are normal.

PQ		ASTM D8184*	>80	<b>0</b>	0	21
Iron	ppm	ASTM D5185(m)	>100	<b>134</b>	▲ 228	▲ 207
Chromium	ppm	ASTM D5185(m)	>5	<b>2</b>	3	3
Nickel	ppm	ASTM D5185(m)	>5	<b>1</b>	2	1
Titanium	ppm	ASTM D5185(m)		<b>0</b>	0	0
Silver	ppm	ASTM D5185(m)		<b>0</b>	0	0
Aluminum	ppm	ASTM D5185(m)	>20	<b>10</b>	17	11
Lead	ppm	ASTM D5185(m)	>30	<b>0</b>	0	<1
Copper	ppm	ASTM D5185(m)	>20	<b>&lt;1</b>	<1	1
Tin	ppm	ASTM D5185(m)	>10	<b>0</b>	0	0
Vanadium	ppm	ASTM D5185(m)		<b>0</b>	0	0
White Metal	scalar	Visual*	NONE	<b>NONE</b>	NONE	NONE
Yellow Metal	scalar	Visual*	NONE	<b>NONE</b>	NONE	NONE

### CONTAMINATION












There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185(m)	>30	<b>8</b>	9	11
Potassium	ppm	ASTM D5185(m)	>20	<b>3</b>	6	6
Water		WC Method	>0.1	<b>NEG</b>	NEG	NEG
Silt	scalar	Visual*	NONE	<b>VLITE</b>	NONE	NONE
Debris	scalar	Visual*	NONE	<b>NONE</b>	NONE	VLITE
Sand/Dirt	scalar	Visual*	NONE	<b>NONE</b>	NONE	NONE
Appearance	scalar	Visual*	NORML	<b>NORML</b>	NORML	NORML
Odor	scalar	Visual*	NORML	<b>NORML</b>	NORML	NORML
Emulsified Water	scalar	Visual*	>0.1	<b>NEG</b>	NEG	NEG

### FLUID CONDITION

The condition of the oil is acceptable for the time in service.

Sodium	ppm	ASTM D5185(m)	>25	<b>4</b>	4	8
Boron	ppm	ASTM D5185(m)	328	<b>249</b>	233	205
Barium	ppm	ASTM D5185(m)	1	<b>0</b>	0	0
Molybdenum	ppm	ASTM D5185(m)		<b>0</b>	0	<1
Manganese	ppm	ASTM D5185(m)		<b>&lt;1</b>	<1	1
Magnesium	ppm	ASTM D5185(m)	1	<b>11</b>	3	6
Calcium	ppm	ASTM D5185(m)	7	<b>30</b>	19	42
Phosphorus	ppm	ASTM D5185(m)	1145	<b>1192</b>	1288	1301
Zinc	ppm	ASTM D5185(m)	3	<b>113</b>	112	164
Sulfur	ppm	ASTM D5185(m)	17909	<b>18896</b>	19801	18355
Visc @ 40°C	cSt	ASTM D7279(m)	99.6	<b>89.7</b>	93.2	88.6

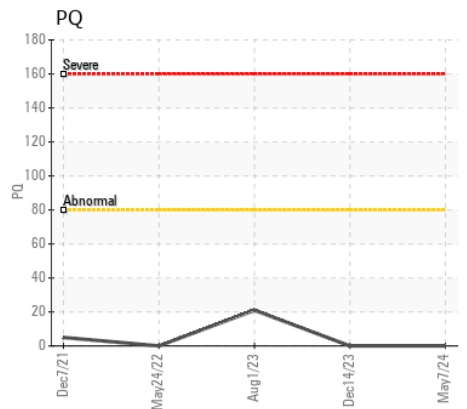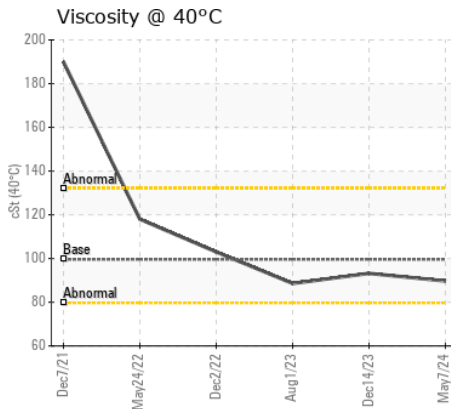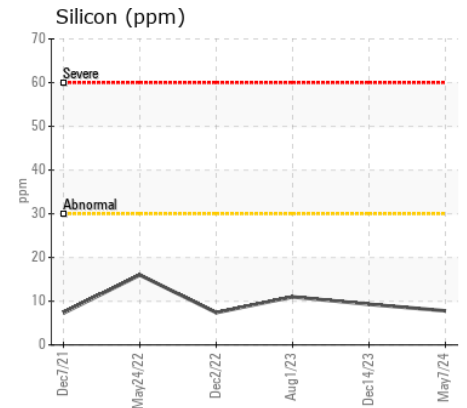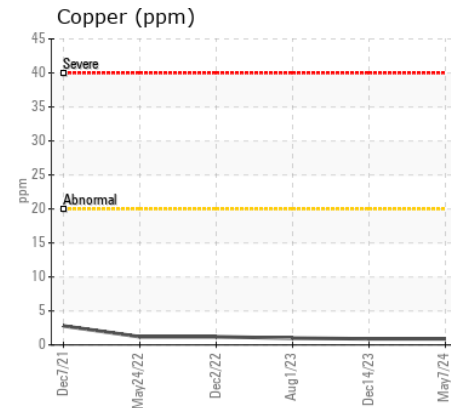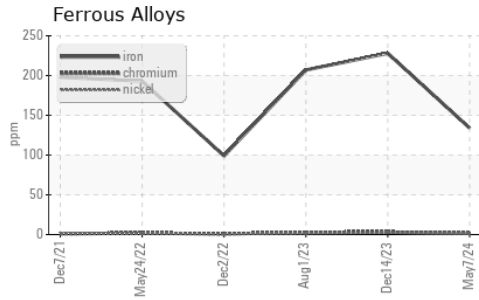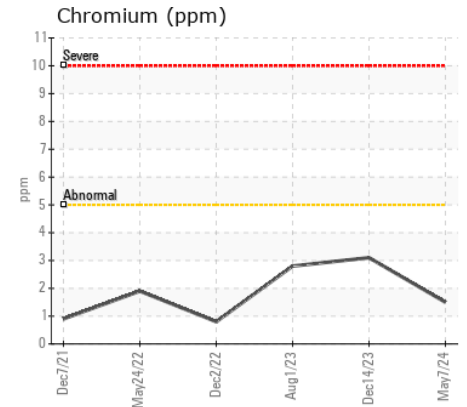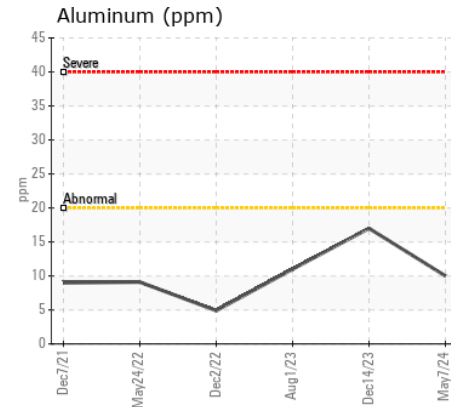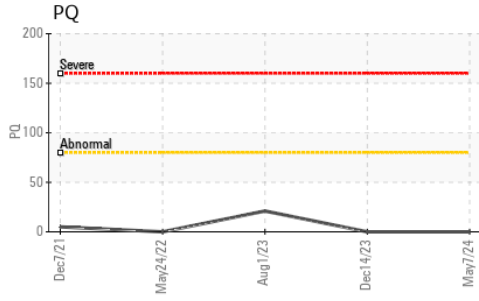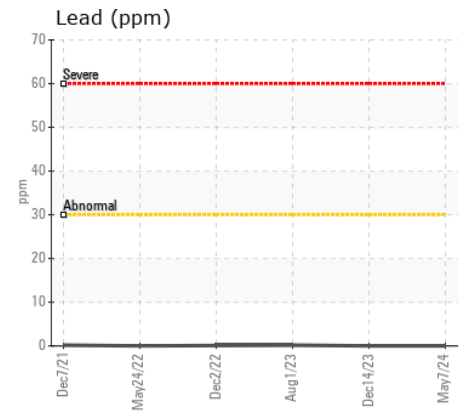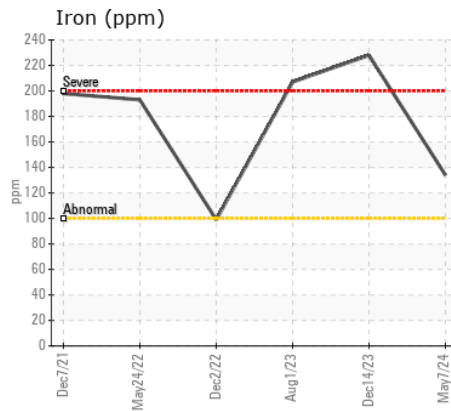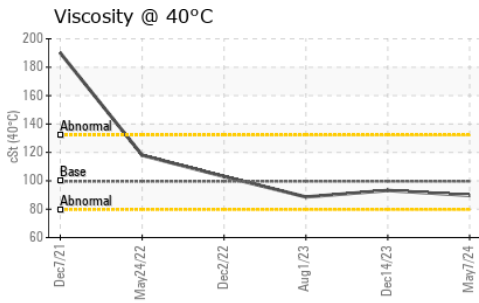

**Laboratory** : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9  
**Sample No.** : LH0281288 **Received** : 13 May 2024  
**Lab Number** : 02635023 **Tested** : 14 May 2024  
**Unique Number** : 5776176 **Diagnosed** : 14 May 2024 - Kevin Marson  
**Test Package** : MOB 1 ( Additional Tests: PQ )

**American Iron and Metal**  
 1273 Kelly Lake Rd.  
 Sudbury, ON  
 CA P3E 5P5  
 Contact: Service Manager

To discuss this sample report, contact Customer Service at 1-800-268-2131.  
 Test denoted (\*) outside scope of accreditation, (m) method modified, (e) tested at external lab.  
 Validity of results and interpretation are based on the sample and information as supplied.

T:  
F: