



OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Area

CRF#41970

Machine Id

545

Component

Left Final Drive

Fluid

MOBIL DELVAC SYNTHETIC ATF (--- GAL)

RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		WC876697	---	---
Sample Date		Client Info		09 May 2024	---	---
Machine Age	kms	Client Info		0	---	---
Oil Age	kms	Client Info		88	---	---
Filter Age	kms	Client Info		88	---	---
Oil Changed		Client Info		N/A	---	---
Filter Changed		Client Info		N/A	---	---
Sample Status				NORMAL	---	---

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185(m)	>500	124	---	---
Chromium	ppm	ASTM D5185(m)	>10	2	---	---
Nickel	ppm	ASTM D5185(m)	>10	4	---	---
Titanium	ppm	ASTM D5185(m)		<1	---	---
Silver	ppm	ASTM D5185(m)		0	---	---
Aluminum	ppm	ASTM D5185(m)	>25	25	---	---
Lead	ppm	ASTM D5185(m)	>25	0	---	---
Copper	ppm	ASTM D5185(m)	>50	3	---	---
Tin	ppm	ASTM D5185(m)	>10	0	---	---
Vanadium	ppm	ASTM D5185(m)		0	---	---
White Metal	scalar	Visual*	NONE	VLITE	---	---
Yellow Metal	scalar	Visual*	NONE	NONE	---	---

CONTAMINATION










There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185(m)	>75	21	---	---
Potassium	ppm	ASTM D5185(m)	>20	10	---	---
Water		WC Method	>0.2	NEG	---	---
Silt	scalar	Visual*	NONE	VLITE	---	---
Debris	scalar	Visual*	NONE	NONE	---	---
Sand/Dirt	scalar	Visual*	NONE	NONE	---	---
Appearance	scalar	Visual*	NORML	NORML	---	---
Odor	scalar	Visual*	NORML	NORML	---	---
Emulsified Water	scalar	Visual*	>0.2	NEG	---	---

FLUID CONDITION

The condition of the oil is acceptable for the time in service.

Sodium	ppm	ASTM D5185(m)		13	---	---
Boron	ppm	ASTM D5185(m)		137	---	---
Barium	ppm	ASTM D5185(m)		0	---	---
Molybdenum	ppm	ASTM D5185(m)		5	---	---
Manganese	ppm	ASTM D5185(m)		1	---	---
Magnesium	ppm	ASTM D5185(m)		1	---	---
Calcium	ppm	ASTM D5185(m)		69	---	---
Phosphorus	ppm	ASTM D5185(m)		330	---	---
Zinc	ppm	ASTM D5185(m)		47	---	---
Sulfur	ppm	ASTM D5185(m)		844	---	---
Visc @ 40°C	cSt	ASTM D7279(m)	39	33.5	---	---

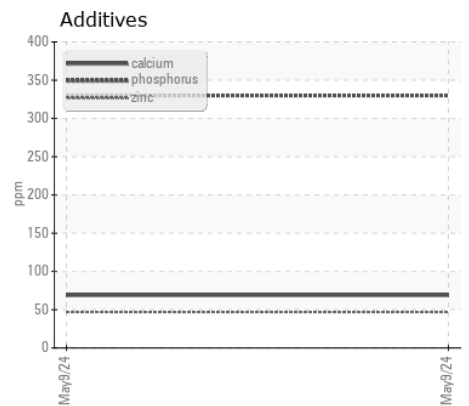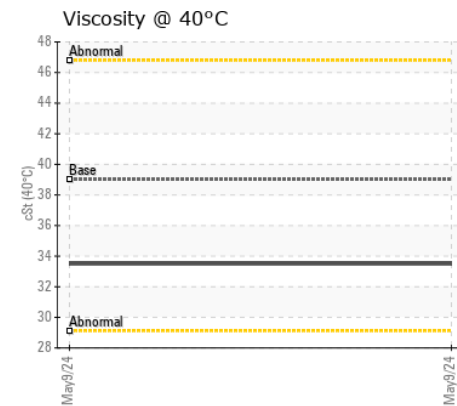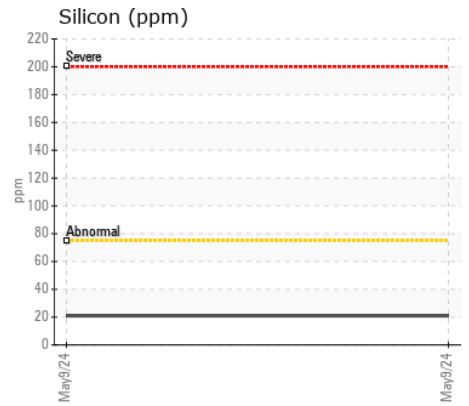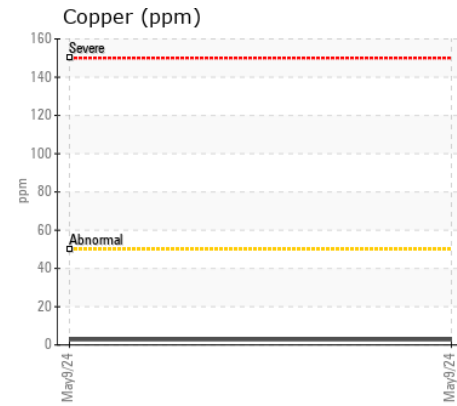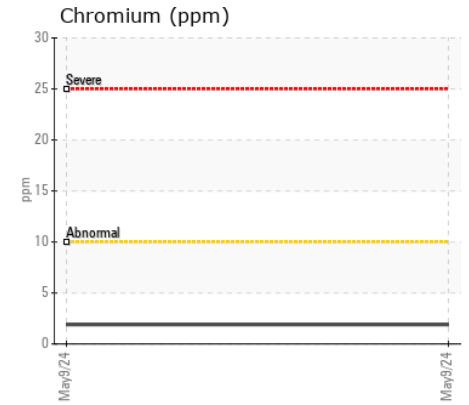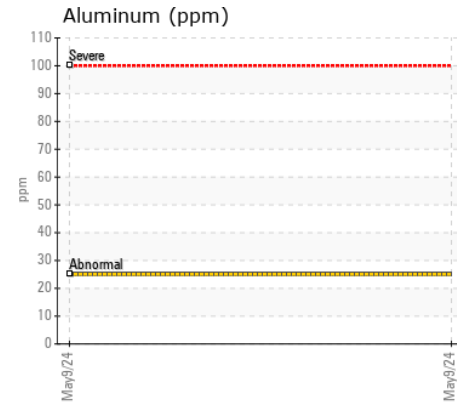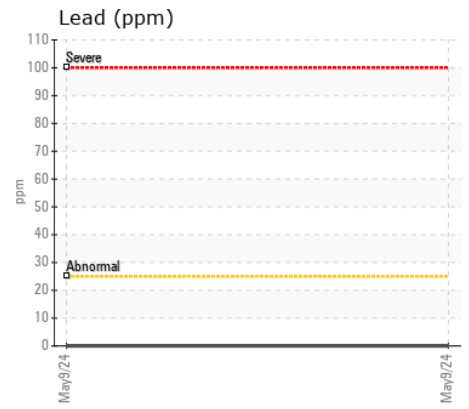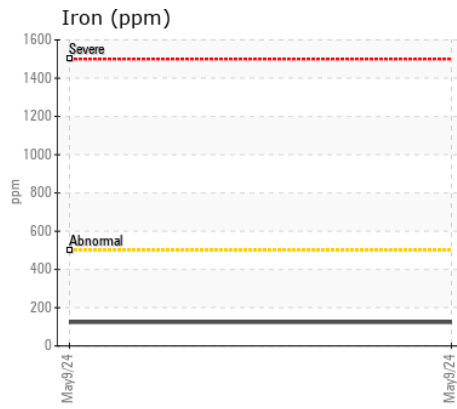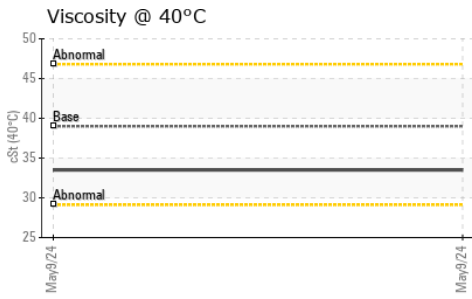

Laboratory : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9
Sample No. : WC876697
Lab Number : 02635061
Unique Number : 5776214
Test Package : MOB 1

DEPARTMENT OF NATIONAL DEFENSE
 MGEN.GEORGE R.PEARKE BUILDING
 OTTAWA, ON
 CA K1A 0K2
 Contact: Philippe Charron
 philippe.charron@forces.gc.ca
 T: (514)252-2777
 F: (819)997-9989

To discuss this sample report, contact Customer Service at 1-800-268-2131.
 Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab.
 Validity of results and interpretation are based on the sample and information as supplied.