



OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Machine Id
TROAJN TU33248-838466
 Component
Starboard Diesel Engine
 Fluid
DIESEL ENGINE OIL SAE 30 (9 LTR)

RECOMMENDATION

Resample at the next service interval to monitor. The fluid was not specified, however, a fluid match indicates that this fluid is (GENERIC) DIESEL ENGINE OIL SAE 30. Please confirm.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		WC0940406	---	---
Sample Date		Client Info		13 May 2024	---	---
Machine Age	hrs	Client Info		2600	---	---
Oil Age	hrs	Client Info		100	---	---
Filter Age	hrs	Client Info		100	---	---
Oil Changed		Client Info		N/A	---	---
Filter Changed		Client Info		N/A	---	---
Sample Status				NORMAL	---	---

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185(m)	>250	3	---	---
Chromium	ppm	ASTM D5185(m)	>10	0	---	---
Nickel	ppm	ASTM D5185(m)	>5	0	---	---
Titanium	ppm	ASTM D5185(m)		0	---	---
Silver	ppm	ASTM D5185(m)	>3	0	---	---
Aluminum	ppm	ASTM D5185(m)	>35	<1	---	---
Lead	ppm	ASTM D5185(m)	>100	2	---	---
Copper	ppm	ASTM D5185(m)	>60	5	---	---
Tin	ppm	ASTM D5185(m)	>5	0	---	---
Vanadium	ppm	ASTM D5185(m)		0	---	---
White Metal	scalar	Visual*	NONE	NONE	---	---
Yellow Metal	scalar	Visual*	NONE	NONE	---	---

CONTAMINATION







Tests indicate that there is no fuel present in the oil. There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185(m)	>35	3	---	---
Potassium	ppm	ASTM D5185(m)	>20	0	---	---
Fuel	%	ASTM D7593*	>5	0.0	---	---
Water		WC Method	>0.2	NEG	---	---
Glycol		WC Method		NEG	---	---
Soot %	%	ASTM D7844*	>3	0	---	---
Nitration	Abs/cm	ASTM D7624*	>20	4.5	---	---
Sulfation	Abs/.1mm	ASTM D7415*	>30	13.9	---	---
Silt	scalar	Visual*	NONE	NONE	---	---
Debris	scalar	Visual*	NONE	NONE	---	---
Sand/Dirt	scalar	Visual*	NONE	NONE	---	---
Appearance	scalar	Visual*	NORML	NORML	---	---
Odor	scalar	Visual*	NORML	NORML	---	---
Emulsified Water	scalar	Visual*	>0.2	NEG	---	---

FLUID CONDITION

The condition of the oil is acceptable for the time in service.

Sodium	ppm	ASTM D5185(m)	>75	2	---	---
Boron	ppm	ASTM D5185(m)	250	70	---	---
Barium	ppm	ASTM D5185(m)	10	0	---	---
Molybdenum	ppm	ASTM D5185(m)	100	74	---	---
Manganese	ppm	ASTM D5185(m)		0	---	---
Magnesium	ppm	ASTM D5185(m)	450	193	---	---
Calcium	ppm	ASTM D5185(m)	3000	2185	---	---
Phosphorus	ppm	ASTM D5185(m)	1150	853	---	---
Zinc	ppm	ASTM D5185(m)	1350	937	---	---
Sulfur	ppm	ASTM D5185(m)	4250	5683	---	---
Oxidation	Abs/.1mm	ASTM D7414*	>25	6.0	---	---
Visc @ 100°C	cSt	ASTM D7279(m)	10.9	11.8	---	---

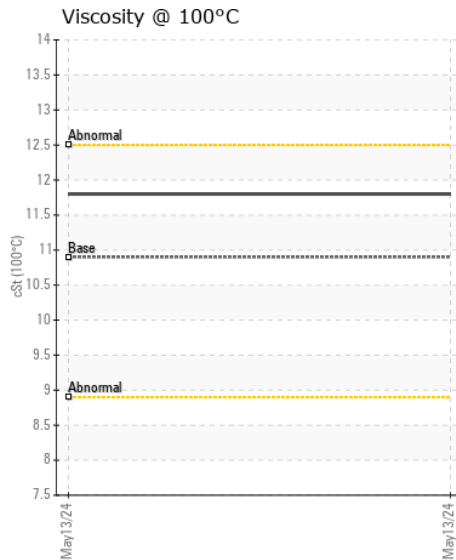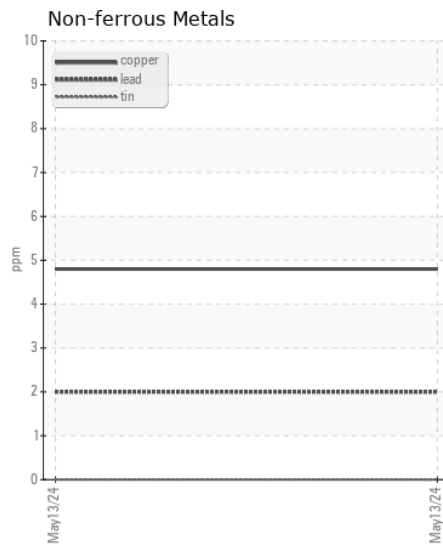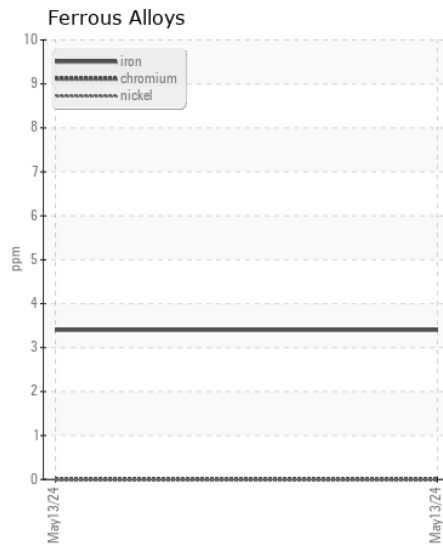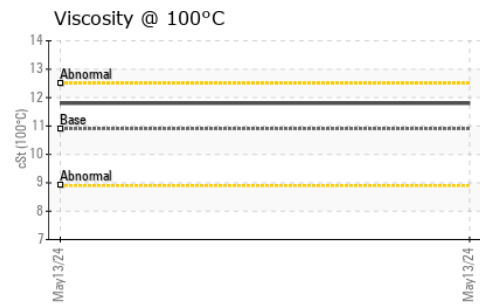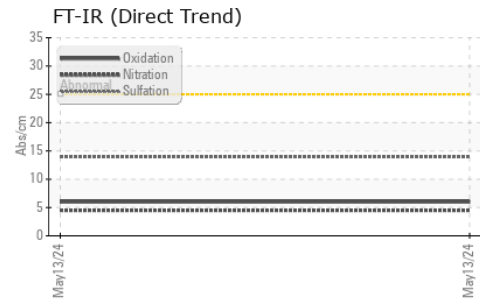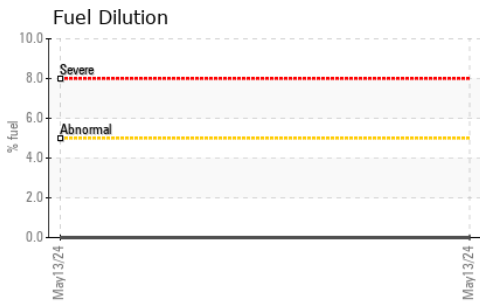

Laboratory : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9
Sample No. : WC0940406 **Received** : 14 May 2024
Lab Number : 02635171 **Tested** : 15 May 2024
Unique Number : 5776324 **Diagnosed** : 15 May 2024 - Wes Davis
Test Package : MAR 1 (Additional Tests: FuelDilution, PercentFuel)

BEACHES MARINE BROKERAGE
 2146 A QUEEN ST E SUITE 106
 TORONTO, ON
 CA M4E 1E3
 Contact: CHARLES FARRAN
 beachesmarine@hotmail.com
 T: (416)691-0312
 F: (866)477-0666

To discuss this sample report, contact Customer Service at 1-800-268-2131.
 Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab.
 Validity of results and interpretation are based on the sample and information as supplied.