



WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL



Machine Id
801072
Component
Diesel Engine
Fluid
PETRO CANADA DURON SHP 10W30 (24 LTR)

RECOMMENDATION

Échantillonner de nouveau l'équipement au prochain intervalle de vidange afin d'en surveiller la condition.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		GFL0107379	GFL0059939	GFL0056185
Sample Date		Client Info		10 May 2024	03 Mar 2023	06 Sep 2022
Machine Age	hrs	Client Info		241369	8620	8063
Oil Age	hrs	Client Info		600	600	600
Filter Age	hrs	Client Info		600	600	600
Oil Changed		Client Info		Changed	Changed	Changed
Filter Changed		Client Info		Changed	Changed	N/A
Sample Status				NORMAL	ABNORMAL	NORMAL

WEAR

Les taux d'usure de tous les composants sont normaux.

Iron	ppm	ASTM D5185(m)	>80	23	66	9
Chromium	ppm	ASTM D5185(m)	>5	1	4	<1
Nickel	ppm	ASTM D5185(m)	>2	<1	1	<1
Titanium	ppm	ASTM D5185(m)		<1	<1	<1
Silver	ppm	ASTM D5185(m)	>3	0	0	0
Aluminum	ppm	ASTM D5185(m)	>30	4	11	3
Lead	ppm	ASTM D5185(m)	>30	0	<1	<1
Copper	ppm	ASTM D5185(m)	>150	2	23	4
Tin	ppm	ASTM D5185(m)	>5	0	<1	0
Vanadium	ppm	ASTM D5185(m)		0	0	0

CONTAMINATION











Elevated aluminum (Al) and/or lead (Pb) and potassium (K) levels in your metals analysis are likely a result of solder flux release into the lubricant and is common on new equipment/components. Il n'y a aucun indice de contamination dans l'huile.

Silicon	ppm	ASTM D5185(m)	>20	4	▲ 28	14
Potassium	ppm	ASTM D5185(m)	>20	6	12	8
Fuel		WC Method	>5	<1.0	<1.0	<1.0
Water		WC Method	>0.2	NEG	NEG	NEG
Glycol		WC Method		NEG	0.0	0.0
Soot %	%	ASTM D7844*	>3	0.2	0.4	0
Nitration	Abs/cm	ASTM D7624*	>20	9.1	11.7	3.9
Sulfation	Abs/.1mm	ASTM D7415*	>30	20.6	23.7	14.7
Emulsified Water	scalar	Visual*	>0.2	NEG	NEG	NEG

FLUID CONDITION

L'état de l'huile est acceptable pour la durée de service.

Sodium	ppm	ASTM D5185(m)		5	15	25
Boron	ppm	ASTM D5185(m)	2	14	4	7
Barium	ppm	ASTM D5185(m)	0	0	0	0
Molybdenum	ppm	ASTM D5185(m)	50	51	64	56
Manganese	ppm	ASTM D5185(m)	0	<1	1	<1
Magnesium	ppm	ASTM D5185(m)	950	715	1017	923
Calcium	ppm	ASTM D5185(m)	1050	1501	1128	1001
Phosphorus	ppm	ASTM D5185(m)	995	1011	1032	1037
Zinc	ppm	ASTM D5185(m)	1180	1203	1223	1105
Sulfur	ppm	ASTM D5185(m)	2600	2657	2424	2531
Oxidation	Abs/.1mm	ASTM D7414*	>25	15.9	18.4	7.6
Visc @ 100°C	cSt	ASTM D7279(m)	12.00	12.8	11.8	11.8

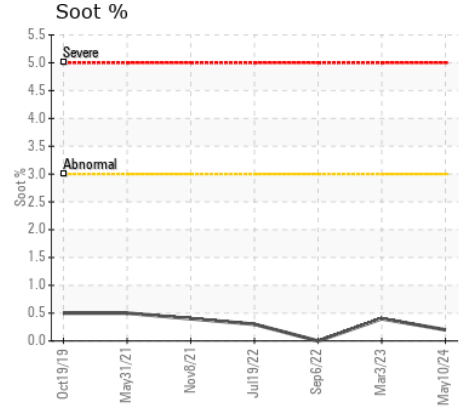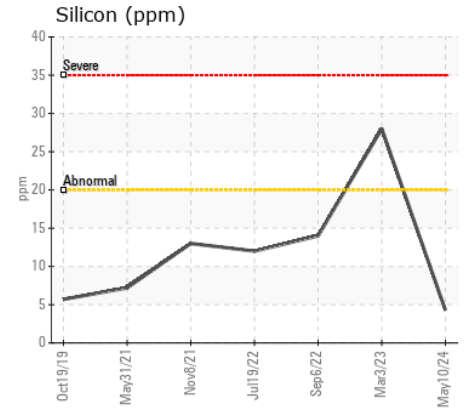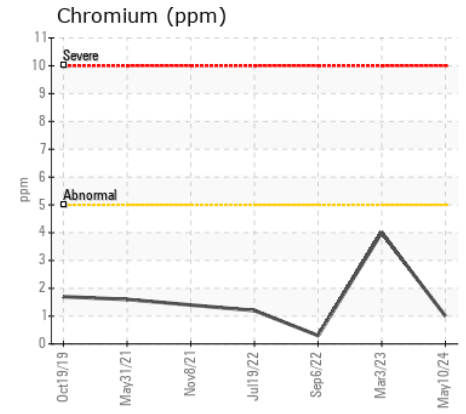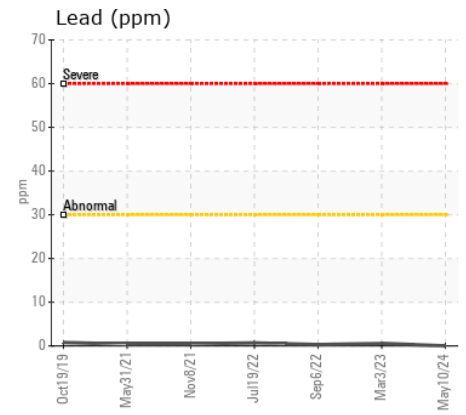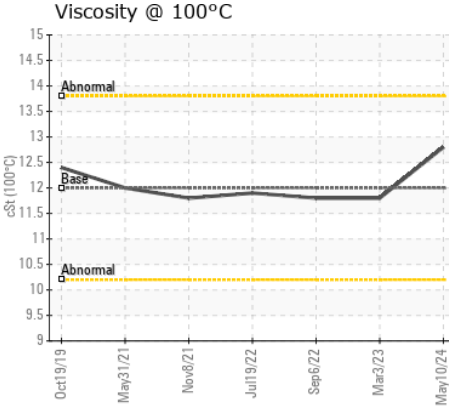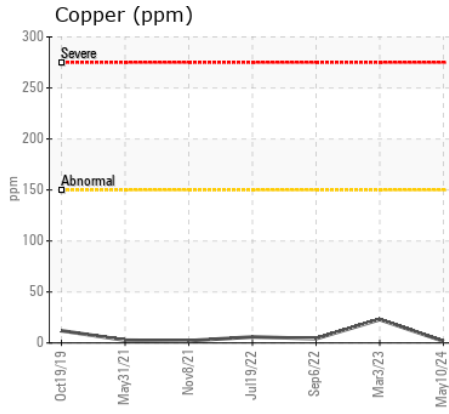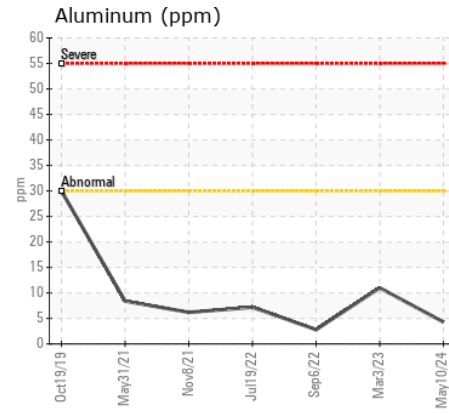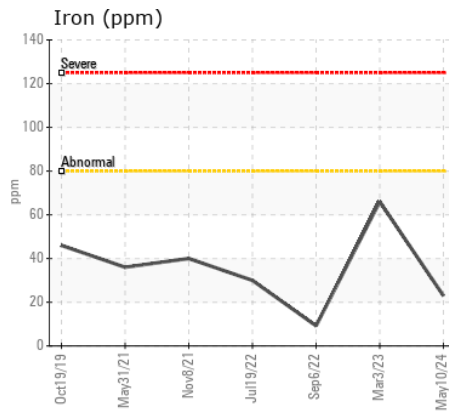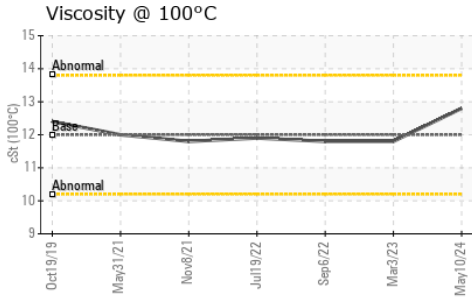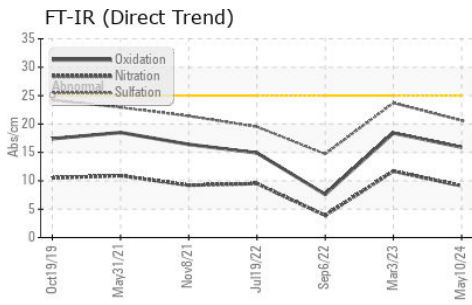

Laboratory : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9
Sample No. : GFL0107379
Lab Number : 02635241
Unique Number : 5776394
Test Package : MOB 1

GFL Environmental - 731STOK - Stoke Hauling
 286 Chemin Cote
 Stoke, QC
 CA J0B 3G0
 Contact: Robert Sayers
 rsayers@matrec.ca

To discuss this sample report, contact Customer Service at 1-800-268-2131.
 Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab.
 Validity of results and interpretation are based on the sample and information as supplied.

T:
F: