



OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Machine Id
PONSSE 2018
 Component
Diesel Engine
 Fluid
{not provided} (--- GAL)

RECOMMENDATION

Resample at the next service interval to monitor. The fluid was not specified, however, a fluid match indicates that this fluid is SAE 30 Diesel Engine Oil. Please confirm the oil type and grade, and specify the brand of the oil on your next sample.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		WC0753437	---	---
Sample Date		Client Info		07 May 2024	---	---
Machine Age	hrs	Client Info		11150	---	---
Oil Age	hrs	Client Info		300	---	---
Filter Age	hrs	Client Info		300	---	---
Oil Changed		Client Info		Changed	---	---
Filter Changed		Client Info		Changed	---	---
Sample Status				NORMAL	---	---

WEAR

Metal levels are typical for a new component breaking in.

Iron	ppm	ASTM D5185(m)	>100	25	---	---
Chromium	ppm	ASTM D5185(m)	>20	<1	---	---
Nickel	ppm	ASTM D5185(m)	>4	<1	---	---
Titanium	ppm	ASTM D5185(m)		0	---	---
Silver	ppm	ASTM D5185(m)	>3	0	---	---
Aluminum	ppm	ASTM D5185(m)	>20	7	---	---
Lead	ppm	ASTM D5185(m)	>40	0	---	---
Copper	ppm	ASTM D5185(m)	>330	28	---	---
Tin	ppm	ASTM D5185(m)	>15	2	---	---
Vanadium	ppm	ASTM D5185(m)		0	---	---

CONTAMINATION













Tests indicate that there is no fuel present in the oil. There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185(m)	>25	6	---	---
Potassium	ppm	ASTM D5185(m)	>20	2	---	---
Fuel	%	ASTM D7593*	>5	0.0	---	---
Water		WC Method	>0.2	NEG	---	---
Glycol		WC Method		NEG	---	---
Soot %	%	ASTM D7844*	>3	0.2	---	---
Nitration	Abs/cm	ASTM D7624*	>20	10.2	---	---
Sulfation	Abs/.1mm	ASTM D7415*	>30	18.2	---	---
Emulsified Water	scalar	Visual*	>0.2	NEG	---	---

FLUID CONDITION

The BN result indicates that there is suitable alkalinity remaining in the oil. Viscosity of sample indicates oil is within SAE 30 range, advise investigate. The condition of the oil is suitable for further service.

Sodium	ppm	ASTM D5185(m)		5	---	---
Boron	ppm	ASTM D5185(m)		93	---	---
Barium	ppm	ASTM D5185(m)		<1	---	---
Molybdenum	ppm	ASTM D5185(m)		40	---	---
Manganese	ppm	ASTM D5185(m)		8	---	---
Magnesium	ppm	ASTM D5185(m)		860	---	---
Calcium	ppm	ASTM D5185(m)		1282	---	---
Phosphorus	ppm	ASTM D5185(m)		683	---	---
Zinc	ppm	ASTM D5185(m)		791	---	---
Sulfur	ppm	ASTM D5185(m)		1967	---	---
Oxidation	Abs/.1mm	ASTM D7414*	>25	13.8	---	---
Base Number (BN)	mg KOH/g	ASTM D2896*		10.54	---	---
Visc @ 100°C	cSt	ASTM D7279(m)		11.4	---	---

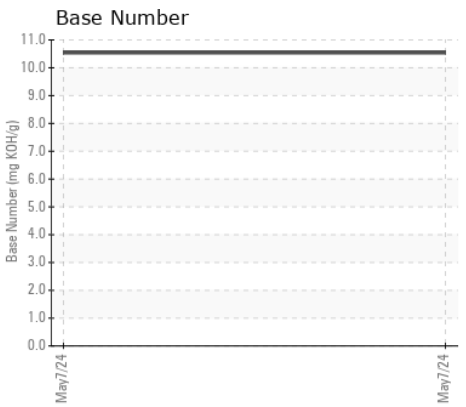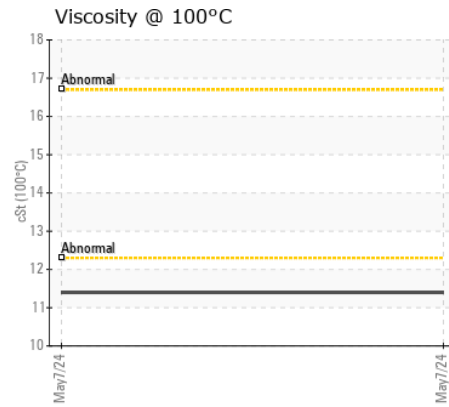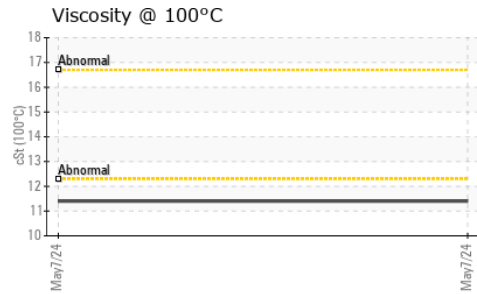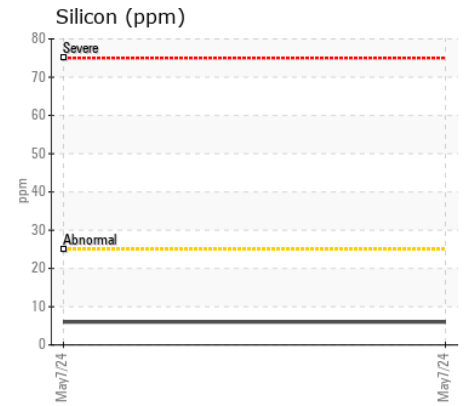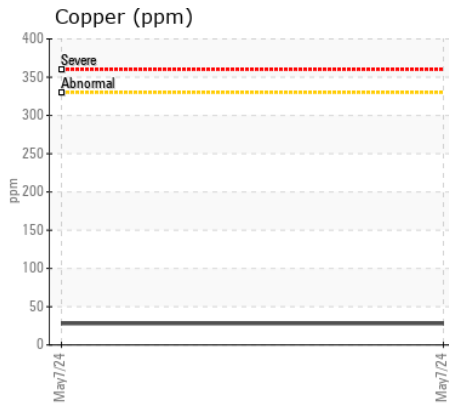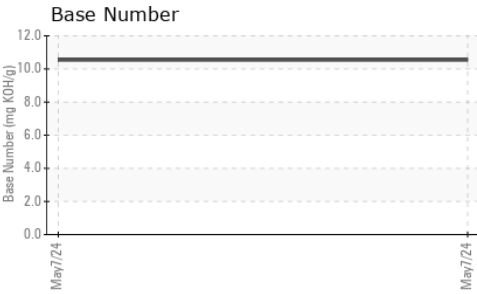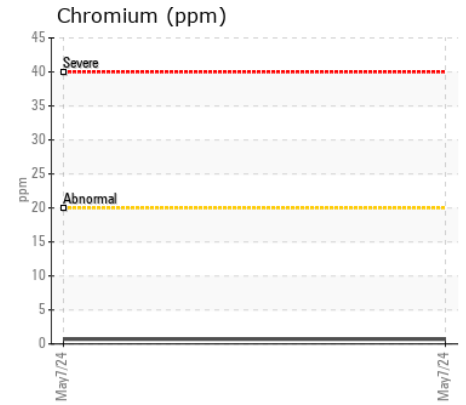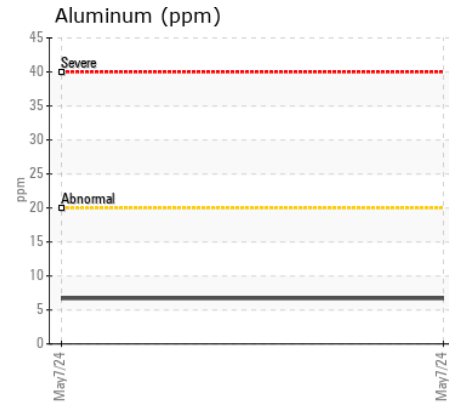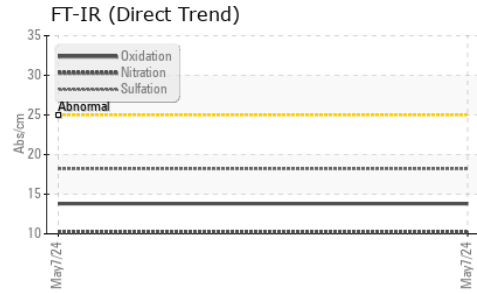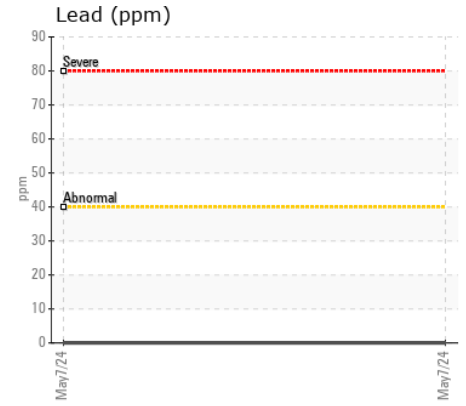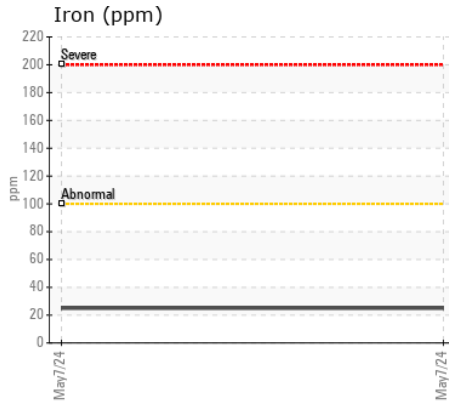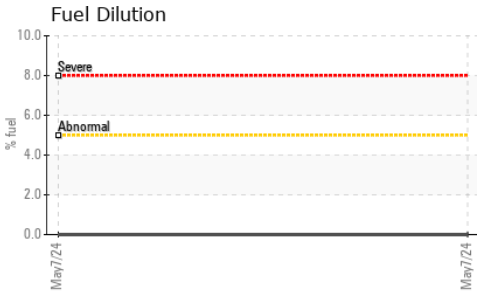

Laboratory : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9
Sample No. : WC0753437 **Received** : 14 May 2024
Lab Number : 02635267 **Tested** : 15 May 2024
Unique Number : 5776420 **Diagnosed** : 15 May 2024 - Kevin Marson
Test Package : MOB 2 (Additional Tests: FuelDilution, PercentFuel)

JSD LOGGING
 964 HIGHWAY 11, PO BOX 40
 PINEWOOD, ON
 CA P0W 1K0
 Contact: Sam Fuhrer
 jsdlogging@gmail.com
 T: (807)483-7799
 F: (807)487-1280

To discuss this sample report, contact Customer Service at 1-800-268-2131.
 Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab.
 Validity of results and interpretation are based on the sample and information as supplied.