



OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	ATTENTION
FLUID CONDITION	NORMAL

Machine Id
REXROTH SNIFF
 Component
Hydraulic System
 Fluid
QUAKER CHEMICAL QUINTOLUBRIC 888-46 (80 LTR)

RECOMMENDATION

The filter change at the time of sampling has been noted. Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		WC0858890	---	---
Sample Date		Client Info		09 May 2024	---	---
Machine Age	mths	Client Info		0	---	---
Oil Age	mths	Client Info		0	---	---
Filter Age	mths	Client Info		7	---	---
Oil Changed		Client Info		N/A	---	---
Filter Changed		Client Info		Changed	---	---
Sample Status				ATTENTION	---	---

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185(m)	>40	<1	---	---
Chromium	ppm	ASTM D5185(m)	>4	0	---	---
Nickel	ppm	ASTM D5185(m)	>20	0	---	---
Titanium	ppm	ASTM D5185(m)		0	---	---
Silver	ppm	ASTM D5185(m)		0	---	---
Aluminum	ppm	ASTM D5185(m)	>4	0	---	---
Lead	ppm	ASTM D5185(m)	>10	<1	---	---
Copper	ppm	ASTM D5185(m)	>60	4	---	---
Tin	ppm	ASTM D5185(m)	>4	179	---	---
Vanadium	ppm	ASTM D5185(m)		0	---	---
White Metal	scalar	Visual*	NONE	NONE	---	---
Yellow Metal	scalar	Visual*	NONE	NONE	---	---

CONTAMINATION











There is a light amount of silt (particulates < 14 microns in size) present in the oil. The water content is negligible.

Silicon	ppm	ASTM D5185(m)	>20	0	---	---
Potassium	ppm	ASTM D5185(m)	>20	3	---	---
Water	%	ASTM D6304*	>0.05	0.019	---	---
ppm Water	ppm	ASTM D6304*	>500	195	---	---
Particles >4µm		ASTM D7647	>5000	7133	---	---
Particles >6µm		ASTM D7647	>1300	1664	---	---
Particles >14µm		ASTM D7647	>160	58	---	---
Particles >21µm		ASTM D7647	>40	12	---	---
Particles >38µm		ASTM D7647	>10	1	---	---
Particles >71µm		ASTM D7647	>3	0	---	---
Oil Cleanliness		ISO 4406 (c)	>19/17/14	20/18/13	---	---
Silt	scalar	Visual*	NONE	NONE	---	---
Debris	scalar	Visual*	NONE	NONE	---	---
Sand/Dirt	scalar	Visual*	NONE	NONE	---	---
Appearance	scalar	Visual*	NORML	NORML	---	---
Odor	scalar	Visual*	NORML	NORML	---	---
Emulsified Water	scalar	Visual*	>0.05	NEG	---	---

FLUID CONDITION

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

Sodium	ppm	ASTM D5185(m)		4	---	---
Boron	ppm	ASTM D5185(m)		3	---	---
Barium	ppm	ASTM D5185(m)		<1	---	---
Molybdenum	ppm	ASTM D5185(m)		0	---	---
Manganese	ppm	ASTM D5185(m)		0	---	---
Magnesium	ppm	ASTM D5185(m)		<1	---	---
Calcium	ppm	ASTM D5185(m)		10	---	---
Phosphorus	ppm	ASTM D5185(m)		167	---	---
Zinc	ppm	ASTM D5185(m)		129	---	---
Sulfur	ppm	ASTM D5185(m)		563	---	---
Acid Number (AN)	mg KOH/g	ASTM D974*	2.0	0.92	---	---
Visc @ 40°C	cSt	ASTM D7279(m)	49.7	46.5	---	---

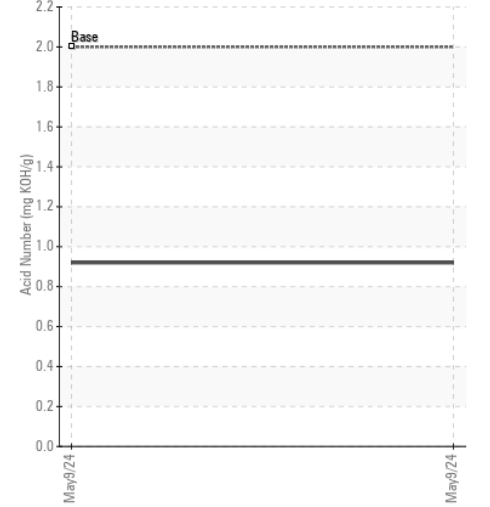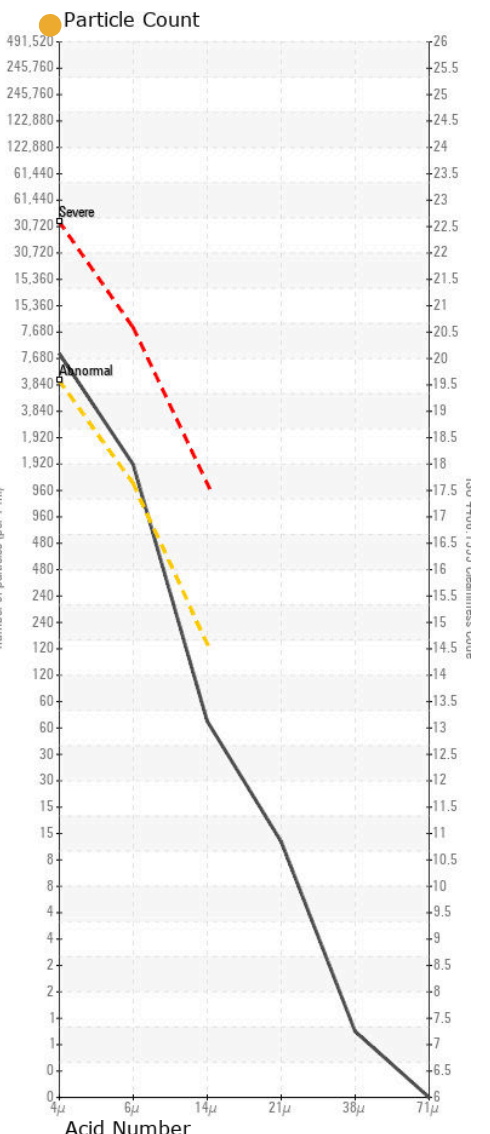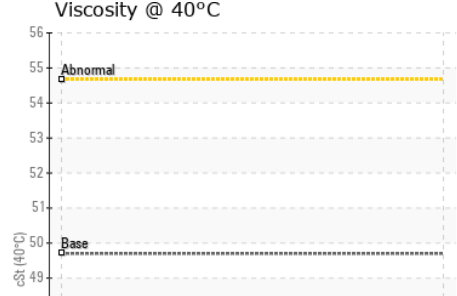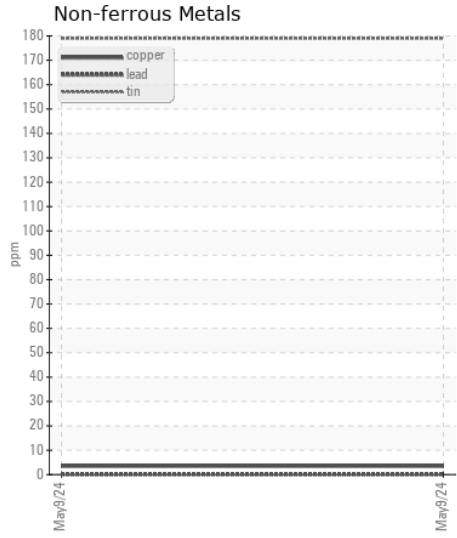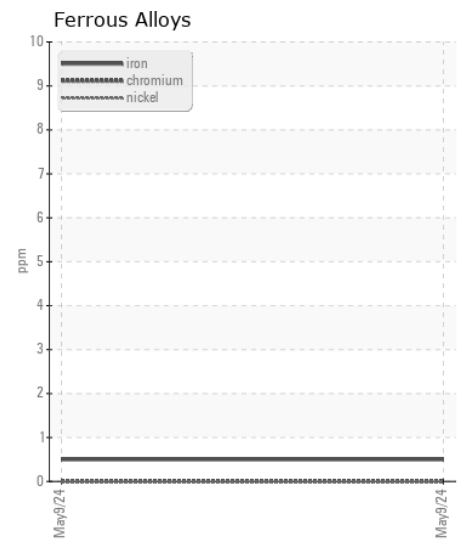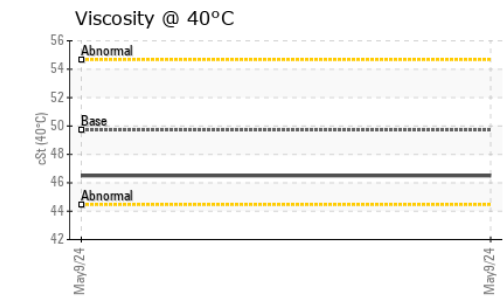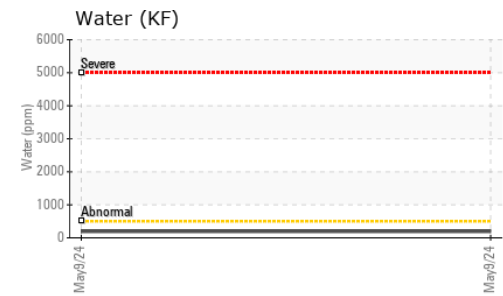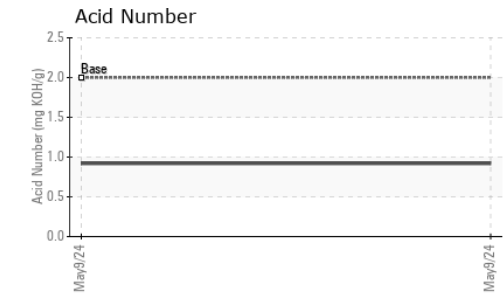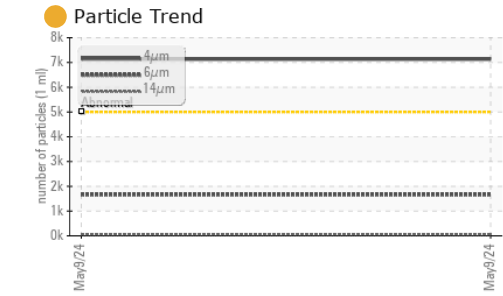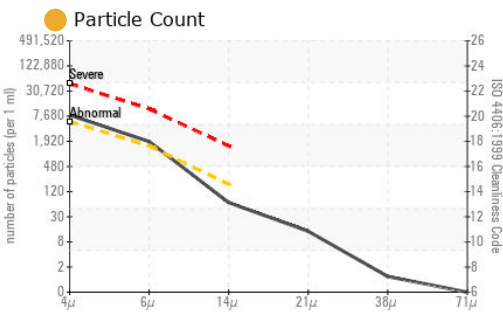

Laboratory : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9
Sample No. : WC0858890 **Received** : 14 May 2024
Lab Number : 02635279 **Tested** : 15 May 2024
Unique Number : 5776432 **Diagnosed** : 15 May 2024 - Wes Davis
Test Package : IND 2 (Additional Tests: KF)

CASVIN ENTERPRISES
 22 RICHGROVE
 TORONTO, ON
 CA M9R 2K9
 Contact: Albert Nestico
 ocitsen@rogers.com
 T: (416)725-5493
 F:

To discuss this sample report, contact Customer Service at 1-800-268-2131.
 Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab.
 Validity of results and interpretation are based on the sample and information as supplied.