



LIEBHERR

OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL



Area
(348643)
Machine Id
LIEBHERR PR736LGP 018793-1155
Component
Right Final Drive
Fluid
GEAR OIL SAE 75W90 (--- GAL)

RECOMMENDATION

Resample at the next service interval to monitor. The fluid was not specified, however, a fluid match indicates that this fluid is (GENERIC) GEAR OIL SAE 75W90. Please confirm.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		LH0199305	LH0199297	LH0199289
Sample Date		Client Info		29 Apr 2024	06 Feb 2023	06 Dec 2021
Machine Age	hrs	Client Info		3004	1978	1074
Oil Age	hrs	Client Info		0	0	0
Filter Age	hrs	Client Info		0	0	0
Oil Changed		Client Info		Not Changed	Changed	Changed
Filter Changed		Client Info		Not Changed	None	N/A
Sample Status				NORMAL	NORMAL	NORMAL

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185(m)	>500	38	64	122
Chromium	ppm	ASTM D5185(m)	>10	<1	<1	2
Nickel	ppm	ASTM D5185(m)	>10	0	0	<1
Titanium	ppm	ASTM D5185(m)		0	<1	<1
Silver	ppm	ASTM D5185(m)		0	0	<1
Aluminum	ppm	ASTM D5185(m)	>25	<1	1	3
Lead	ppm	ASTM D5185(m)	>25	0	<1	1
Copper	ppm	ASTM D5185(m)	>50	18	31	33
Tin	ppm	ASTM D5185(m)	>10	<1	1	2
Vanadium	ppm	ASTM D5185(m)		0	0	0
White Metal	scalar	Visual*	NONE	NONE	NONE	LIGHT
Yellow Metal	scalar	Visual*	NONE	NONE	NONE	NONE

CONTAMINATION










There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185(m)	>75	1	4	7
Potassium	ppm	ASTM D5185(m)	>20	<1	<1	1
Water		WC Method	>0.2	NEG	NEG	NEG
Silt	scalar	Visual*	NONE	NONE	NONE	NONE
Debris	scalar	Visual*	NONE	NONE	NONE	NONE
Sand/Dirt	scalar	Visual*	NONE	NONE	NONE	NONE
Appearance	scalar	Visual*	NORML	NORML	NORML	NORML
Odor	scalar	Visual*	NORML	NORML	NORML	NORML
Emulsified Water	scalar	Visual*	>0.2	NEG	NEG	NEG

FLUID CONDITION

The condition of the oil is acceptable for the time in service.

Sodium	ppm	ASTM D5185(m)		<1	2	3
Boron	ppm	ASTM D5185(m)	400	128	177	5
Barium	ppm	ASTM D5185(m)	200	7	19	59
Molybdenum	ppm	ASTM D5185(m)	12	0	0	<1
Manganese	ppm	ASTM D5185(m)		<1	<1	1
Magnesium	ppm	ASTM D5185(m)	12	1	<1	1
Calcium	ppm	ASTM D5185(m)	150	11	4	14
Phosphorus	ppm	ASTM D5185(m)	1650	1024	1475	1195
Zinc	ppm	ASTM D5185(m)	125	21	11	20
Sulfur	ppm	ASTM D5185(m)	22500	20180	25305	24903
Visc @ 40°C	cSt	ASTM D7279(m)	109	84.0	129	330

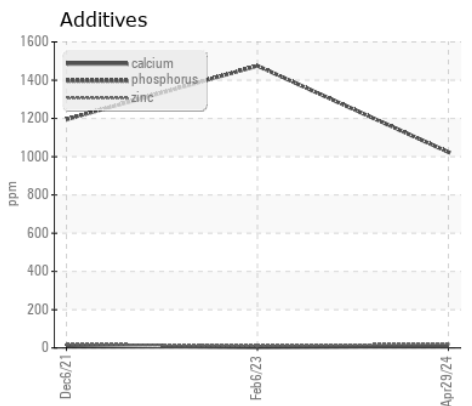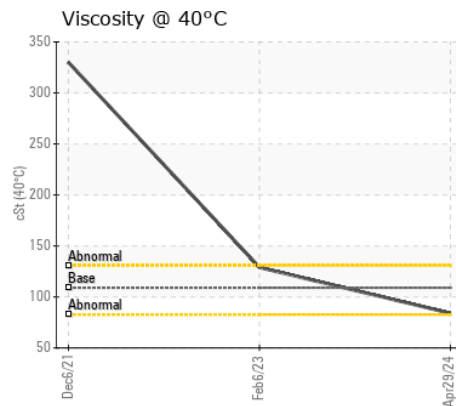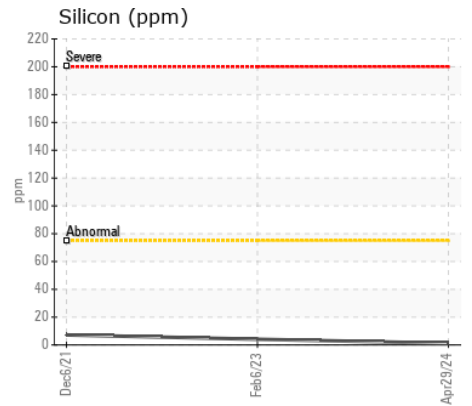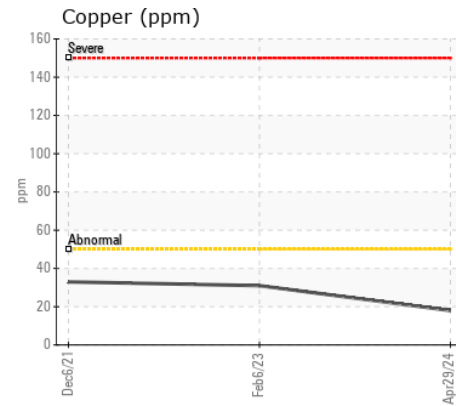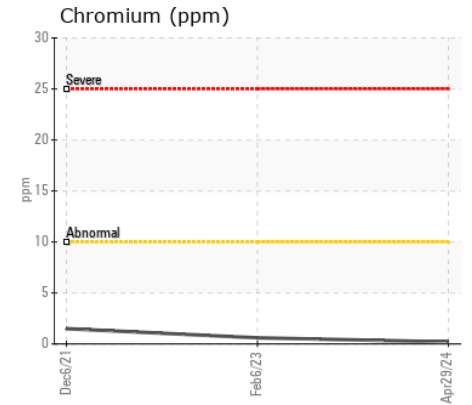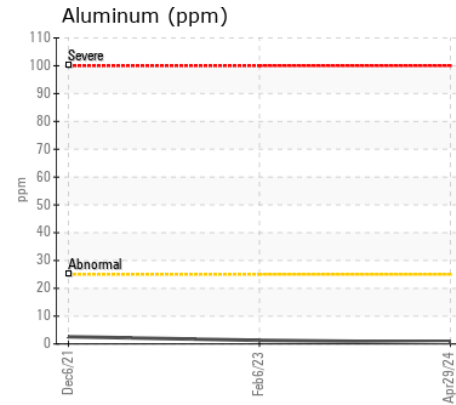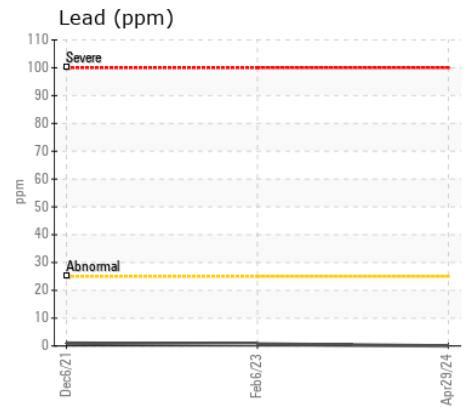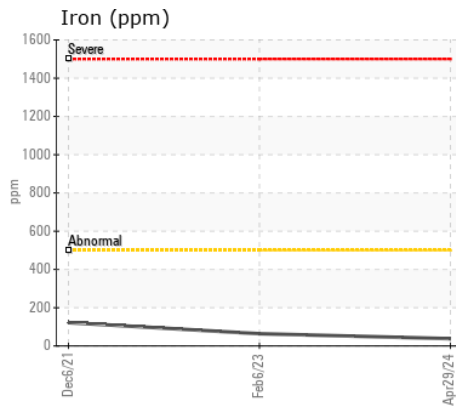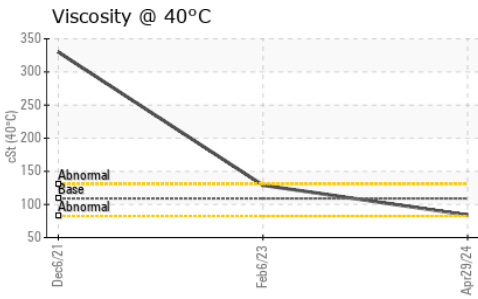

Laboratory : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9
Sample No. : LH0199305 **Received** : 14 May 2024
Lab Number : 02635354 **Tested** : 14 May 2024
Unique Number : 5776507 **Diagnosed** : 14 May 2024 - Wes Davis
Test Package : MOBCE

COUNTY OF ST. PAUL NO. 19
 5015 - 49 AVENUE
 ST. PAUL, AB
 CA T0A 3A4
 Contact: DD SKAWRONSKI-MUNRO
 DSKAWRONSKI@COUNTY.STPAUL.AB.CA
 T: (780)645-3006
 F: (780)645-1800

To discuss this sample report, contact Customer Service at 1-800-268-2131.
 Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab.
 Validity of results and interpretation are based on the sample and information as supplied.