



WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL



Area
GFL216
Machine Id
401211
Component
Diesel Engine
Fluid
PETRO CANADA DURON HP 15W40 (--- GAL)

RECOMMENDATION

Confirm the source of the lubricant being utilized for top-up/fill. Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		GFL0121946	GFL0111706	GFL0101405
Sample Date		Client Info		07 May 2024	21 Feb 2024	06 Dec 2023
Machine Age	kms	Client Info		0	369350	361758
Oil Age	kms	Client Info		0	0	0
Filter Age	kms	Client Info		0	0	0
Oil Changed		Client Info		Changed	Changed	Changed
Filter Changed		Client Info		Changed	Changed	Changed
Sample Status				NORMAL	NORMAL	NORMAL

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185(m)	>120	4	5	4
Chromium	ppm	ASTM D5185(m)	>20	0	0	0
Nickel	ppm	ASTM D5185(m)	>5	0	<1	<1
Titanium	ppm	ASTM D5185(m)	>2	0	0	0
Silver	ppm	ASTM D5185(m)	>2	0	0	0
Aluminum	ppm	ASTM D5185(m)	>20	2	2	1
Lead	ppm	ASTM D5185(m)	>40	0	1	<1
Copper	ppm	ASTM D5185(m)	>330	<1	2	<1
Tin	ppm	ASTM D5185(m)	>15	0	0	0
Vanadium	ppm	ASTM D5185(m)		0	0	0

CONTAMINATION













There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185(m)	>25	1	2	3
Potassium	ppm	ASTM D5185(m)	>20	7	2	<1
Fuel		WC Method	>3.0	<1.0	<1.0	<1.0
Water		WC Method	>0.2	NEG	NEG	NEG
Glycol	%	ASTM D7922*		0.0	NEG	NEG
Soot %	%	ASTM D7844*	>4	0	0.1	0.1
Nitration	Abs/cm	ASTM D7624*	>20	8.3	8.3	7.4
Sulfation	Abs/.1mm	ASTM D7415*	>30	21.9	18.2	17.8
Emulsified Water	scalar	Visual*	>0.2	NEG	NEG	NEG

FLUID CONDITION

Additive levels indicate the addition of a different brand, or type of oil. The condition of the oil is acceptable for the time in service.

Sodium	ppm	ASTM D5185(m)		14	17	4
Boron	ppm	ASTM D5185(m)	0	113	3	5
Barium	ppm	ASTM D5185(m)	0	0	0	<1
Molybdenum	ppm	ASTM D5185(m)	60	7	57	58
Manganese	ppm	ASTM D5185(m)	0	0	0	0
Magnesium	ppm	ASTM D5185(m)	1010	118	935	941
Calcium	ppm	ASTM D5185(m)	1070	2053	1037	1022
Phosphorus	ppm	ASTM D5185(m)	1150	959	999	987
Zinc	ppm	ASTM D5185(m)	1270	1125	1159	1148
Sulfur	ppm	ASTM D5185(m)	2060	2823	2696	2527
Oxidation	Abs/.1mm	ASTM D7414*	>25	18.2	15.5	14.4
Visc @ 100°C	cSt	ASTM D7279(m)	15.6	13.7	13.7	13.5

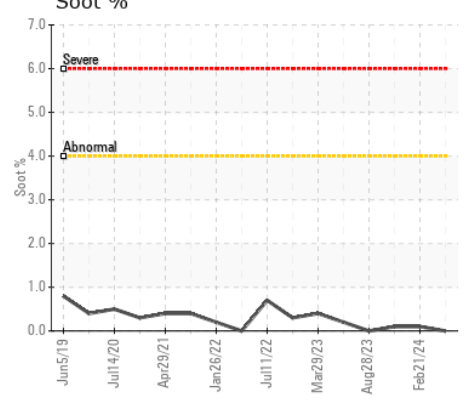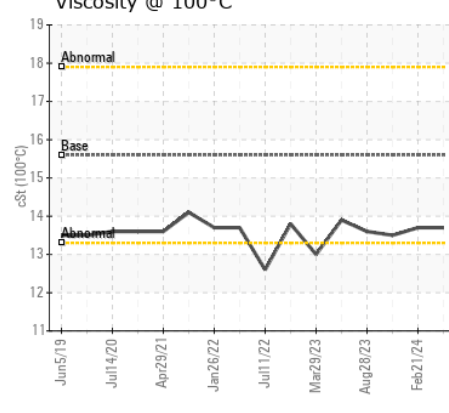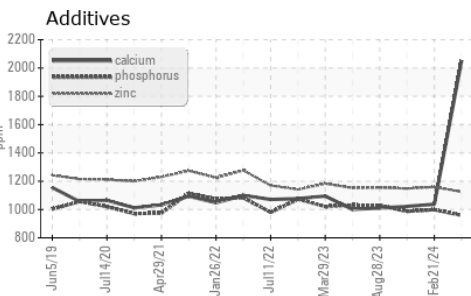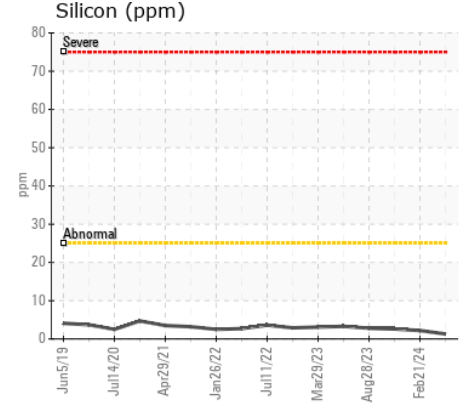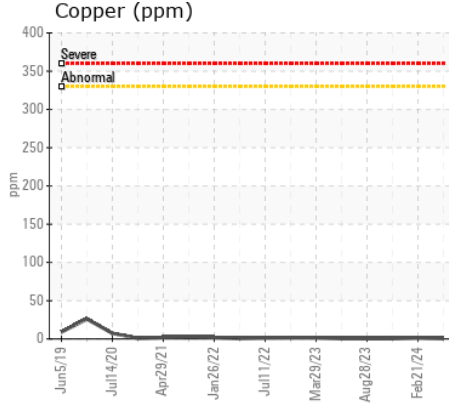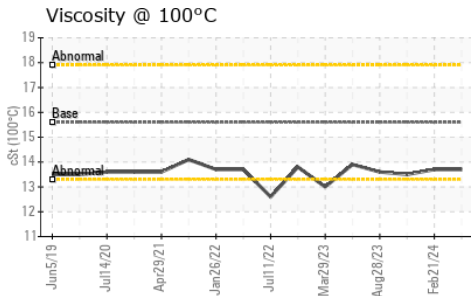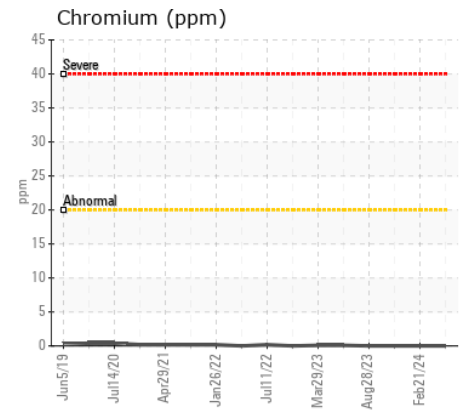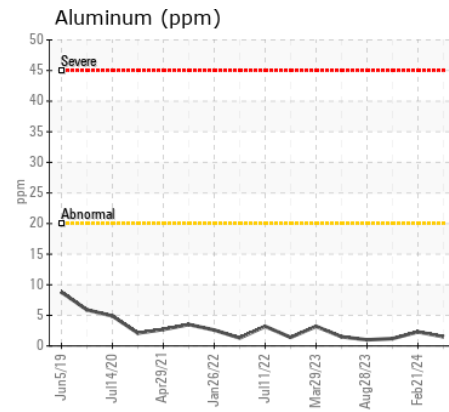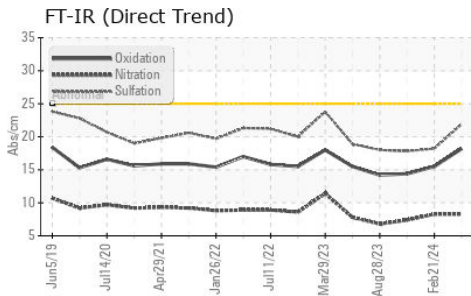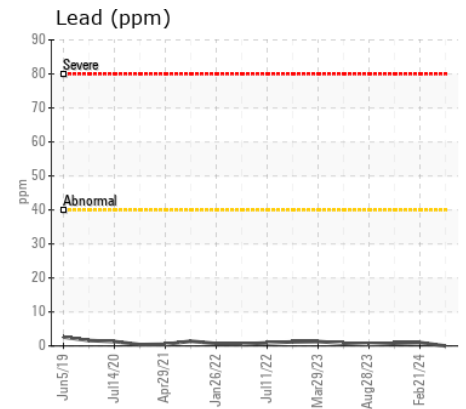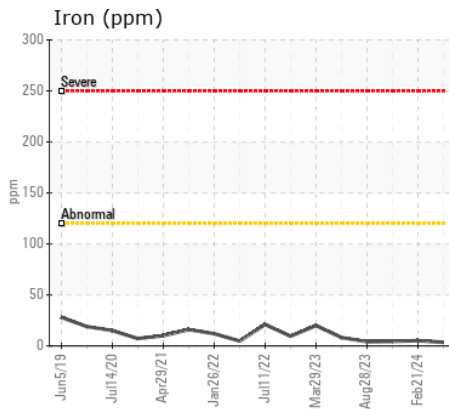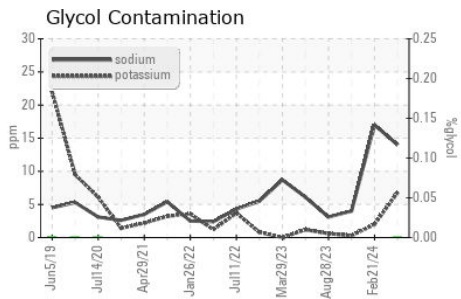

Laboratory : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9
Sample No. : GFL0121946
Lab Number : 02635551
Unique Number : 5776704
Test Package : MOB 1 (Additional Tests: Glycol)

GFL Environmental - 252 - GTA Hauling
 3668 Weston Road
 North York, ON
 CA M9L 1W2
 Contact: Amanda Cipollone
 acipollone@gflenv.com

To discuss this sample report, contact Customer Service at 1-800-268-2131.
 Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab.
 Validity of results and interpretation are based on the sample and information as supplied.