



WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Machine Id
1521
 Component
Diesel Engine
 Fluid
DIESEL ENGINE OIL SAE 15W40 (--- GAL)

RECOMMENDATION

Resample at the next service interval to monitor. Please specify the component make and model with your next sample.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		PC0083217	PC0083630	PC0075859
Sample Date		Client Info		14 May 2024	16 Jan 2024	10 Oct 2023
Machine Age	hrs	Client Info		3470	2916	2499
Oil Age	hrs	Client Info		0	0	0
Filter Age	hrs	Client Info		0	0	0
Oil Changed		Client Info		N/A	N/A	N/A
Filter Changed		Client Info		N/A	N/A	N/A
Sample Status				NORMAL	NORMAL	NORMAL

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185(m)	>100	23	28	33
Chromium	ppm	ASTM D5185(m)	>20	0	<1	<1
Nickel	ppm	ASTM D5185(m)	>4	0	<1	0
Titanium	ppm	ASTM D5185(m)		0	0	0
Silver	ppm	ASTM D5185(m)	>3	0	0	<1
Aluminum	ppm	ASTM D5185(m)	>20	9	11	17
Lead	ppm	ASTM D5185(m)	>40	0	0	<1
Copper	ppm	ASTM D5185(m)	>330	2	1	2
Tin	ppm	ASTM D5185(m)	>15	0	<1	<1
Vanadium	ppm	ASTM D5185(m)		0	0	0

CONTAMINATION












Elevated aluminum (Al) and/or lead (Pb) and potassium (K) levels in your metals analysis are likely a result of solder flux release into the lubricant and is common on new equipment/components. There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185(m)	>25	10	13	12
Potassium	ppm	ASTM D5185(m)	>20	15	20	37
Fuel		WC Method	>5	<1.0	<1.0	<1.0
Water		WC Method	>0.2	NEG	NEG	NEG
Glycol		WC Method		NEG	NEG	NEG
Soot %	%	ASTM D7844*	>3	0.2	0.1	0
Nitration	Abs/cm	ASTM D7624*	>20	10.3	9.7	6.0
Sulfation	Abs/.1mm	ASTM D7415*	>30	21.2	21.8	18.7
Emulsified Water	scalar	Visual*	>0.2	NEG	NEG	NEG

FLUID CONDITION

The condition of the oil is acceptable for the time in service.

Sodium	ppm	ASTM D5185(m)	>158	1	2	2
Boron	ppm	ASTM D5185(m)	250	1	1	1
Barium	ppm	ASTM D5185(m)	10	0	0	<1
Molybdenum	ppm	ASTM D5185(m)	100	60	55	60
Manganese	ppm	ASTM D5185(m)		<1	0	<1
Magnesium	ppm	ASTM D5185(m)	450	995	913	974
Calcium	ppm	ASTM D5185(m)	3000	1155	1305	1180
Phosphorus	ppm	ASTM D5185(m)	1150	1049	1059	1041
Zinc	ppm	ASTM D5185(m)	1350	1246	1230	1268
Sulfur	ppm	ASTM D5185(m)	4250	2480	2823	2507
Oxidation	Abs/.1mm	ASTM D7414*	>25	17.5	18.0	13.4
Visc @ 40°C	cSt	ASTM D7279(m)	115	91.9	90.1	93.8
Visc @ 100°C	cSt	ASTM D7279(m)	14.4	13.6	13.5	13.8
Viscosity Index (VI)	Scale	ASTM D2270*	126	149	151	149

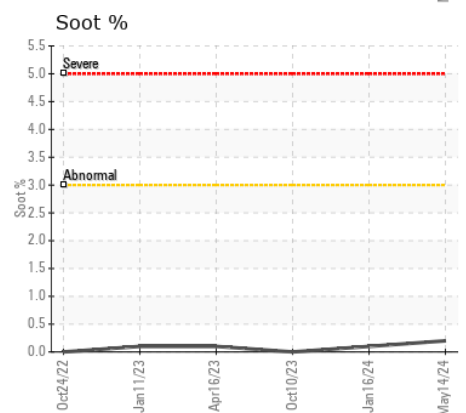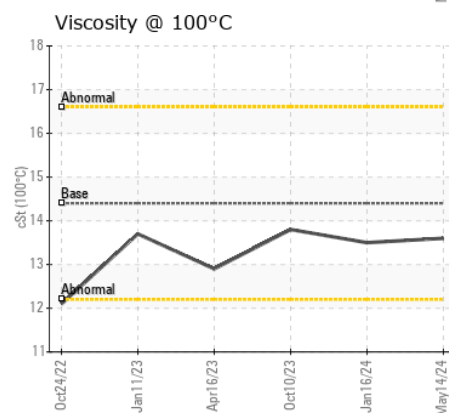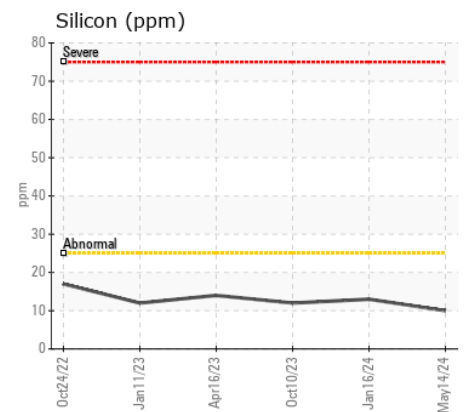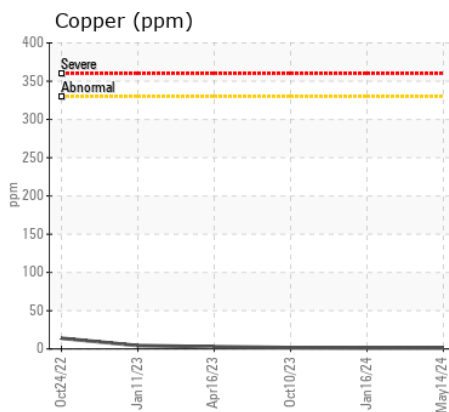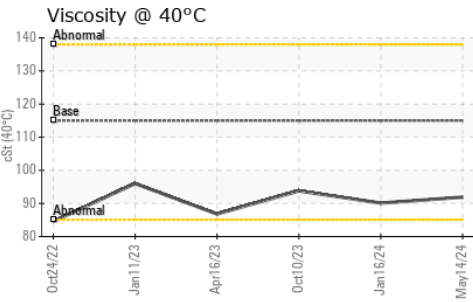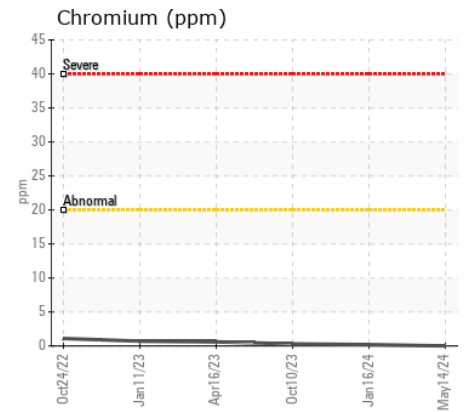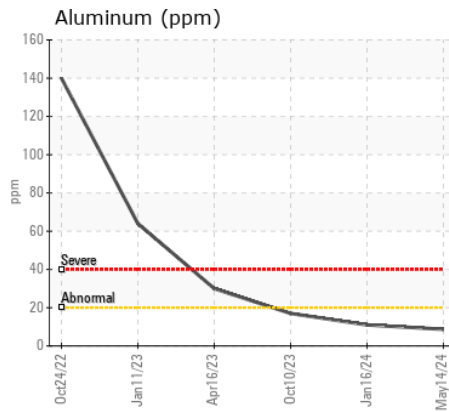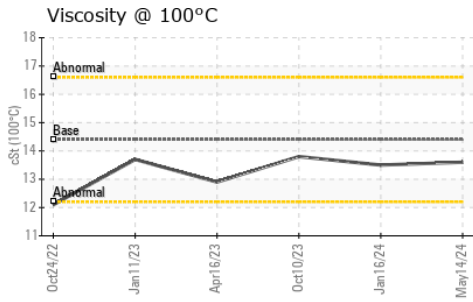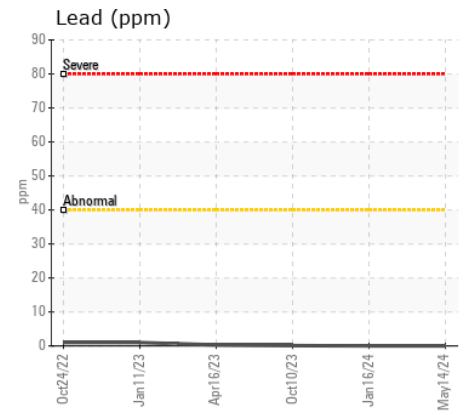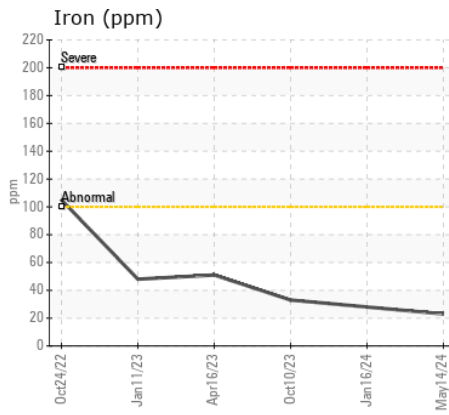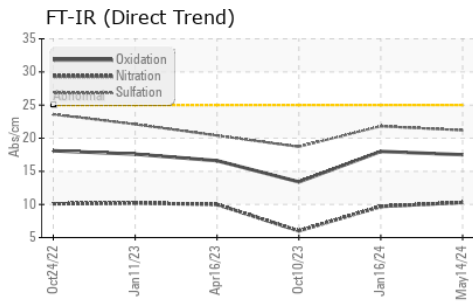

Laboratory : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9
Sample No. : PC0083217
Lab Number : 02635573
Unique Number : 5776726
Test Package : MOB 1 (Additional Tests: KV40, VI)
Received : 15 May 2024
Tested : 15 May 2024
Diagnosed : 15 May 2024 - Wes Davis

LES ENTREPRISES MICHAUVILLE INC.
 270 RUE BRUNET
 MONT ST-HILAIRE, QC
 CA J3H 0M6
 Contact: Martin Trudel
 mtrudel@michaudville.com

To discuss this sample report, contact Customer Service at 1-800-268-2131.
 Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab.
 Validity of results and interpretation are based on the sample and information as supplied.