



OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Machine Id
APRIL ISO ELCO 126
 Component
New (Unused) Oil
 Fluid
APRIL ISO ELCO 126 (--- GAL)

RECOMMENDATION

Il s'agit du relevé de base de cette huile neuve (inutilisée). Le fluide peut servir.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		ASF0000413	---	---
Sample Date		Client Info		09 May 2024	---	---
Machine Age	hrs	Client Info		0	---	---
Oil Age	hrs	Client Info		0	---	---
Filter Age	hrs	Client Info		0	---	---
Oil Changed		Client Info		N/A	---	---
Filter Changed		Client Info		N/A	---	---
Sample Status				NORMAL	---	---

WEAR

{sans objet}

Iron	ppm	ASTM D5185(m)	>5	0	---	---
Chromium	ppm	ASTM D5185(m)	>5	0	---	---
Nickel	ppm	ASTM D5185(m)	>5	0	---	---
Titanium	ppm	ASTM D5185(m)		0	---	---
Silver	ppm	ASTM D5185(m)	>5	0	---	---
Aluminum	ppm	ASTM D5185(m)	>5	0	---	---
Lead	ppm	ASTM D5185(m)	>5	0	---	---
Copper	ppm	ASTM D5185(m)	>5	0	---	---
Tin	ppm	ASTM D5185(m)	>5	0	---	---
Vanadium	ppm	ASTM D5185(m)		0	---	---
White Metal	scalar	Visual*	NONE	NONE	---	---
Yellow Metal	scalar	Visual*	NONE	NONE	---	---

CONTAMINATION












Il n'y a aucun indice de contamination dans le huile (inutilisée) neuve.

Silicon	ppm	ASTM D5185(m)	>15	0	---	---
Potassium	ppm	ASTM D5185(m)	>20	0	---	---
Water		WC Method		NEG	---	---
Soot %	%	ASTM D7844*		0	---	---
Nitration	Abs/cm	ASTM D7624*		3.0	---	---
Sulfation	Abs/.1mm	ASTM D7415*		10.3	---	---
Silt	scalar	Visual*	NONE	NONE	---	---
Debris	scalar	Visual*	NONE	NONE	---	---
Sand/Dirt	scalar	Visual*	NONE	NONE	---	---
Appearance	scalar	Visual*	NORML	NORML	---	---
Odor	scalar	Visual*	NORML	NORML	---	---
Emulsified Water	scalar	Visual*		NEG	---	---

FLUID CONDITION

L'état de l'huile permet d'en l'utilisation.

Sodium	ppm	ASTM D5185(m)		0	---	---
Boron	ppm	ASTM D5185(m)		<1	---	---
Barium	ppm	ASTM D5185(m)		0	---	---
Molybdenum	ppm	ASTM D5185(m)		0	---	---
Manganese	ppm	ASTM D5185(m)		0	---	---
Magnesium	ppm	ASTM D5185(m)		1	---	---
Calcium	ppm	ASTM D5185(m)		5	---	---
Phosphorus	ppm	ASTM D5185(m)		468	---	---
Zinc	ppm	ASTM D5185(m)		512	---	---
Sulfur	ppm	ASTM D5185(m)		1262	---	---
Oxidation	Abs/.1mm	ASTM D7414*		2.0	---	---
Visc @ 40°C	cSt	ASTM D7279(m)		30.6	---	---
Visc @ 100°C	cSt	ASTM D7279(m)		5.2	---	---
Viscosity Index (VI)	Scale	ASTM D2270*		98	---	---

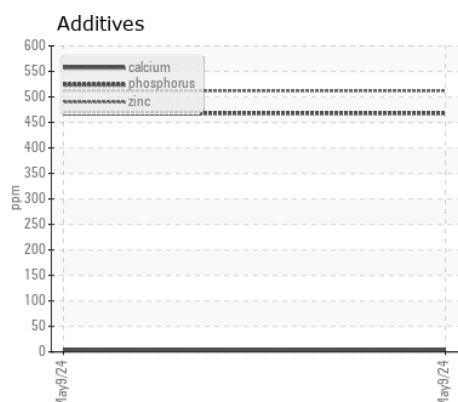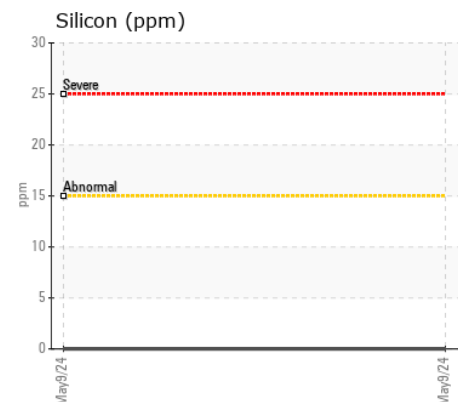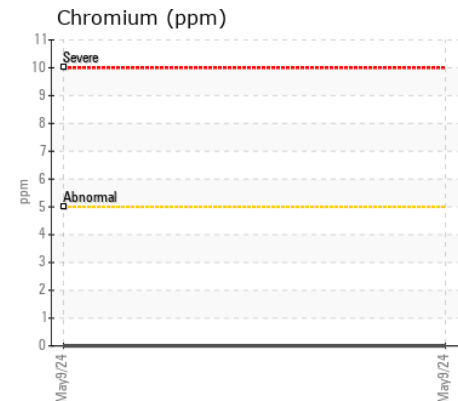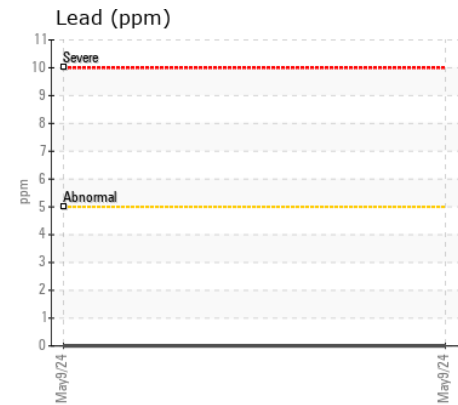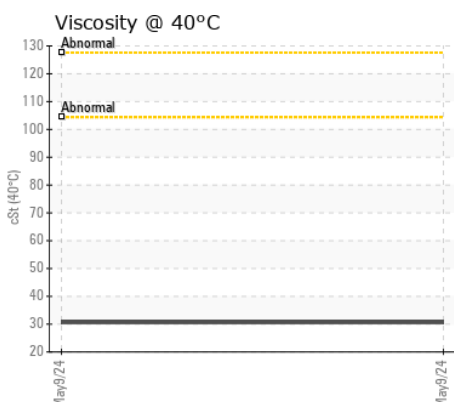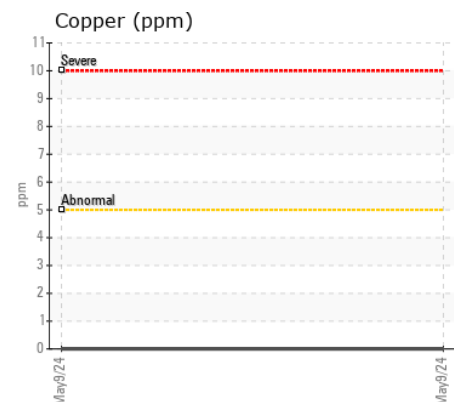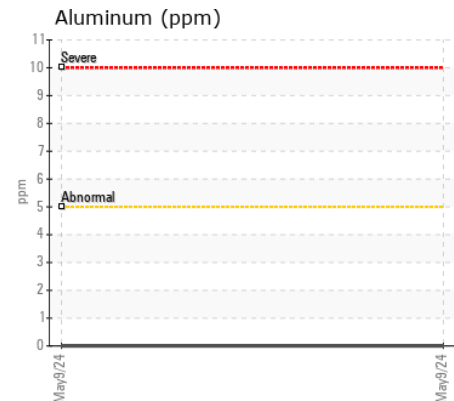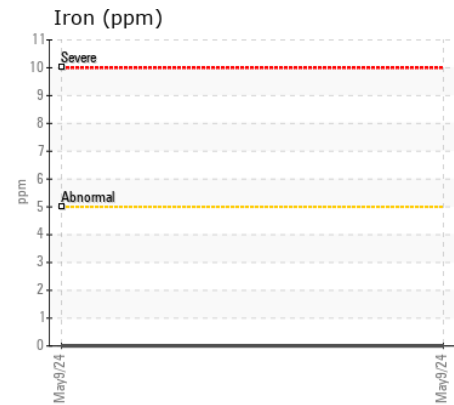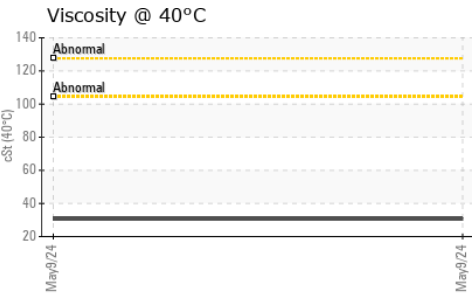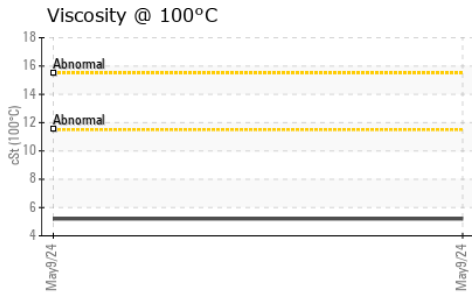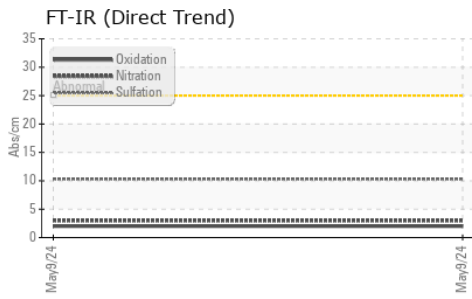

Laboratory : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9
Sample No. : ASF0000413 **Received** : 15 May 2024
Lab Number : 02635623 **Tested** : 15 May 2024
Unique Number : 5776776 **Diagnosed** : 16 May 2024 - Bill Quesnel
Test Package : MOB 1 (Additional Tests: FT-IR, ICP-NewOil, KV100, VI)

April Super Flo
 9 rue Beland
 L'Isle-Verte, QC
 CA G0L 1K0
 Contact: Michel Jalbert
 mjalbert@aprilsuperflo.com
 T:
 F: (418)898-2192

To discuss this sample report, contact Customer Service at 1-800-268-2131.
 Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab.
 Validity of results and interpretation are based on the sample and information as supplied.